



IEC 61800-7-203

Edition 1.0 2007-11

# INTERNATIONAL STANDARD

Adjustable speed electrical power drive systems –  
Part 7-203: Generic interface and use of profiles for power drive systems –  
Profile type 3 specification





## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembé  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00



IEC 61800-7-203

Edition 1.0 2007-11

# INTERNATIONAL STANDARD

Adjustable speed electrical power drive systems –  
Part 7-203: Generic interface and use of profiles for power drive systems –  
Profile type 3 specification

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

ICS 29.200; 35.100.05

PRICE CODE

ISBN 2-8318-9377-1

## CONTENTS

FOREWORD .....	10
INTRODUCTION .....	12
1 Scope .....	15
2 Normative references .....	15
3 Terms, definitions and abbreviated terms .....	16
3.1 Terms and definitions .....	16
3.2 Abbreviated terms .....	20
4 General .....	21
4.1 Background .....	21
4.2 Requirements .....	22
4.3 Goals of the PROFIdrive Profile .....	22
5 Data types .....	22
5.1 Data types overview .....	22
5.2 Standard data types .....	23
5.3 Profile-specific data types .....	23
5.3.1 General .....	23
5.3.2 Normalised value: N2, N4 .....	24
5.3.3 Normalised value (variable normalisation): X2, X4 .....	24
5.3.4 Fixed point value: E2 .....	25
5.3.5 Fixed point value: C4 .....	25
5.3.6 Bit sequence: V2 .....	26
5.3.7 Nibble: L2 .....	26
5.3.8 Time constant: T2, T4 .....	26
5.3.9 Time constant: D2 .....	27
5.3.10 Reciprocal time constant: R2 .....	27
6 Specifications .....	27
6.1 Integration of drives in automation systems .....	27
6.1.1 General .....	27
6.1.2 Base Model .....	27
6.1.3 Drive Model .....	35
6.1.4 P-Device communication model .....	39
6.1.5 Application Model and Application Classes .....	40
6.2 Parameter model .....	46
6.2.1 Parameter definition .....	46
6.2.2 Global and Local Parameters .....	58
6.2.3 Base Mode Parameter Access .....	59
6.3 Drive control application process .....	78
6.3.1 General Axis type Drive Object architecture .....	78
6.3.2 Control and Status words .....	81
6.3.3 Operating modes and State Machine .....	87
6.3.4 DO IO Data .....	103
6.3.5 Dynamic Servo Control (DSC) .....	114
6.3.6 Position feedback interface .....	118
6.3.7 Periphery .....	140
6.3.8 Warnings, messages, faults, diagnostics .....	141

6.3.9 Identification .....	150
6.3.10 Drive reset (power-on reset) .....	153
6.3.11 Operation priority of parameters and control priority .....	155
6.3.12 User data reliability.....	157
6.3.13 Specified DO functions for the Application Classes.....	161
6.4 Parameter Definition.....	163
6.4.1 PROFIdrive Parameter listed by Function .....	163
6.4.2 PROFIdrive Parameter listed by number.....	167
6.5 Integration of Drives in Process Technology (VIK-NAMUR) .....	176
6.5.1 General .....	176
6.5.2 Commands and Checkback Signals .....	177
6.5.3 State diagrams .....	179
6.5.4 Inevitable line interruption and external interlock .....	181
6.5.5 Standard telegram .....	182
Bibliography.....	184
 Figure 1 – Structure of IEC 61800-7.....	14
Figure 2 – PROFIdrive Devices and there relationship .....	28
Figure 3 – General Communication Model of a PROFIdrive Automation System .....	29
Figure 4 – The PROFIdrive Device (consists of one or several Functional Objects).....	30
Figure 5 – Hierarchical order in the Object Model .....	31
Figure 6 – PROFIdrive Base Model contains the “Application Layer” and “Communication Layer” .....	32
Figure 7 – Typical use case for Clock Synchronous Operation .....	33
Figure 8 – General Model for Clock Synchronous Operation .....	34
Figure 9 – Base Model State Machine.....	35
Figure 10 – General Drive Unit model .....	36
Figure 11 – General Drive Object architecture .....	37
Figure 12 – Principle functional model of an Axis type Drive Object .....	37
Figure 13 – Classes of PROFIdrive P-Devices .....	38
Figure 14 – Classes of PROFIdrive Drive Units .....	39
Figure 15 – Overview about the available Communication Services between the PROFIdrive Devices .....	39
Figure 16 – Application Class 1 .....	41
Figure 17 – Application Class 2 .....	42
Figure 18 – Application Class 3 .....	43
Figure 19 – Application Class 4 .....	44
Figure 20 – Application Class 5 .....	45
Figure 21 – Application Class 6 .....	46
Figure 22 – Example overview of global and local parameters of a Multi-Axis/Modular Drive Unit .....	59
Figure 23 – Byte order for Words and Double words .....	60
Figure 24 – Data flow for Base Mode Parameter Access.....	67
Figure 25 – General functional elements of the PROFIdrive Axis type DO.....	79
Figure 26 – Functional block diagram of the PROFIdrive Axis type DO .....	80

Figure 27 – General state diagram for all operating modes .....	89
Figure 28 – General functionality of a PROFIdrive Axis DO with Application Class 1 functionality .....	91
Figure 29 – Speed setpoint channel for use in Application Class 1 and 4 .....	92
Figure 30 – General functionality of a PROFIdrive Axis DO with Application Class 4 functionality .....	93
Figure 31 – Reduced speed setpoint channel for use in Application Class 4 (optional).....	94
Figure 32 – General functionality of a PROFIdrive Axis DO with Application Class 3 functionality .....	95
Figure 33 – Functionality of the Motion Controller in the Program submode .....	96
Figure 34 – Functionality of the Motion Controller in the MDI submode .....	97
Figure 35 – State diagram of the positioning mode in Program-submode .....	99
Figure 36 – State diagram of the positioning mode in MDI-submode .....	100
Figure 37 – Homing Procedure: Home Position Set.....	101
Figure 38 – Homing Procedure: Abortion by the controller .....	101
Figure 39 – Traversing Task Active.....	102
Figure 40 – Change of the traversing tasks immediately .....	102
Figure 41 – Example for configuring a telegram .....	111
Figure 42 – Structure of the position control circuit based on the velocity setpoint interface without DSC .....	114
Figure 43 – Structure of the position control circuit based on the velocity setpoint interface with DSC .....	115
Figure 44 – Example of the sensor interface (Sensor-1: two actual values/Sensor-2: one actual value) .....	119
Figure 45 – Actual value format, example 1 .....	123
Figure 46 – Actual value format, example 2 .....	123
Figure 47 – Actual value format, example 3 .....	123
Figure 48 – Actual value format, example 4 .....	124
Figure 49 – Actual value format, example 5 .....	124
Figure 50 – Actual value format, example 6 .....	124
Figure 51 – Actual value format, example 7 .....	124
Figure 52 – Actual value format, example 8 .....	125
Figure 53 – State diagram of the position feedback interface with designations of the states and transitions.....	130
Figure 54 – Acknowledgement of acknowledgeable sensor error.....	135
Figure 55 – Acknowledgement of unacknowledgeable sensor error.....	136
Figure 56 – Timing diagram: Measurement on the fly – sequence 1 .....	137
Figure 57 – Timing diagram: Measurement on the fly – sequence 2 .....	138
Figure 58 – Timing diagram: Reference mark search .....	139
Figure 59 – Overview about the diagnostic mechanisms of PROFIdrive .....	141
Figure 60 – Working of the warning mechanism .....	142
Figure 61 – Overview about the fault buffer mechanism .....	143
Figure 62 – Fault acknowledgement for the fault buffer mechanism .....	144
Figure 63 – Processing of the fault messages in the fault buffer mechanism .....	145
Figure 64 – Fault buffer (subsequent system) with example .....	147

Figure 65 – Fault number list with example .....	148
Figure 66 – Drive reset: Direct initiation (P972 = 1).....	155
Figure 67 – Example: Long term Sign-Of-Life failure of the controller.....	158
Figure 68 – Example: Temporary failure of the controller LS (negative deviation) .....	158
Figure 69 – Example: Temporary failure of the controller LS (positive deviation; double step) .....	158
Figure 70 – Example: Permanent failure of the DO LS .....	159
Figure 71 – Example: Temporary failure of the DO LS (negative deviation).....	160
Figure 72 – Example: Temporary failure of the DO LS (positive deviation; double step) .....	160
Figure 73 – Value of the DO Sign-Of-Life failure counter (axis-specific) with respect to the transferred controller Sign-Of-Life .....	161
Figure 74 – Functionality and Interfaces for drive integration according to VIK-NAMUR .....	176
Figure 75 – Principle structure of the drive interface according to VIK-NAMUR guideline.....	177
Figure 76 – Speed setpoint channel for VIK-NAMUR process technology operating mode .....	180
Figure 77 – Process technology operating mode, control word 1 bit 15 and status word 1 bit 10,11,13,14.....	181
Figure 78 – Process technology operating mode, inevitable line interruption and external interlock .....	182
Table 1 – Standard data types .....	23
Table 2 – Profile specific data types .....	23
Table 3 – N2, N4-Range of values .....	24
Table 4 – N2, N4-Coding .....	24
Table 5 – X2, X4-Range of values.....	25
Table 6 – X2, X4-Coding (example x=12/28).....	25
Table 7 – E2-Range of values.....	25
Table 8 – E2-Coding .....	25
Table 9 – C4-Range of values.....	26
Table 10 – V2-Coding .....	26
Table 11 – L2-Coding .....	26
Table 12 – T2, T4-Range of values .....	26
Table 13 – D2-Range of values.....	27
Table 14 – R2-Range of values.....	27
Table 15 – Application Classes .....	40
Table 16 – Parameter definition .....	46
Table 17 – Parameter description elements .....	47
Table 18 – Parameter description element "Identifier (ID)" .....	48
Table 19 – Parameter description element "variable attribute" .....	48
Table 20 – Variable index and conversion index for SI units .....	49
Table 21 – Conversion values for the conversion index (SI units).....	53
Table 22 – Variable index and conversion index for US units .....	54
Table 23 – Conversion values for the conversion index (US units) .....	55

Table 24 – Parameter Description Elements “IO Data Reference Value/IO Data Normalisation” .....	57
Table 25 – Text array for parameter description.....	57
Table 26 – Text array for the data type Boolean.....	58
Table 27 – Text array for data type V2 (bit sequence).....	58
Table 28 – Base mode parameter request.....	61
Table 29 – Base mode parameter response .....	61
Table 30 – Permissible combinations consisting of attribute, number of elements and subindex .....	64
Table 31 – Coding of the fields in parameter request/parameter response of Base Mode Parameter Access .....	64
Table 32 – Error numbers in Base Mode parameter responses .....	65
Table 33 – General State machine for the Parameter Manager Processing .....	67
Table 34 – Sequence 1: Parameter request .....	68
Table 35 – Sequence 1: Parameter response positive with data of data type Word .....	68
Table 36 – Sequence 1: Parameter response positive with data of data type Double word .....	69
Table 37 – Sequence 1: Parameter response, negative .....	69
Table 38 – Sequence 2: Parameter request .....	69
Table 39 – Sequence 2: Parameter response, positive.....	69
Table 40 – Sequence 2: Parameter response, negative .....	70
Table 41 – Sequence 3: Parameter request .....	70
Table 42 – Sequence 3: Parameter response, positive.....	70
Table 43 – Sequence 3: Parameter response, negative .....	70
Table 44 – Sequence 4: Parameter request .....	71
Table 45 – Sequence 4: Parameter response, positive.....	71
Table 46 – Sequence 4: Parameter response, negative .....	71
Table 47 – Sequence 5: Parameter request .....	71
Table 48 – Sequence 5: Parameter response, positive.....	72
Table 49 – Sequence 5: Parameter response, negative .....	72
Table 50 – Sequence 6: Parameter request .....	72
Table 51 – Sequence 6: Parameter response (+): all partial accesses OK .....	73
Table 52 – Sequence 6: Parameter response (-): first and third partial access OK, second partial access erroneous.....	73
Table 53 – Sequence 7: Parameter request .....	73
Table 54 – Sequence 7: Parameter response (+): all partial accesses OK.....	74
Table 55 – Sequence 7: Parameter response (-): first and third partial access OK, second partial access erroneous.....	74
Table 56 – Sequence 8: Parameter request .....	75
Table 57 – Sequence 8: Parameter response positive with data of the data type word (for example ID).....	75
Table 58 – Sequence 8: Parameter response positive with text.....	75
Table 59 – Sequence 8: Parameter response, negative .....	75
Table 60 – Sequence 9: Parameter request .....	76
Table 61 – Sequence 9: Parameter response, positive.....	76

Table 62 – Sequence 9: Parameter response, negative .....	76
Table 63 – Sequence 10: Parameter request .....	77
Table 64 – Sequence 10: Parameter response, positive.....	77
Table 65 – Sequence 10: Parameter response, negative .....	77
Table 66 – Sequence 11: Request of values, description and text in one request.....	77
Table 67 – Sequence 11: Parameter response (+): all partial accesses OK.....	78
Table 68 – Overview on the assignment of the bits of control word 1 .....	81
Table 69 – Detailed assignment of the common control word 1 bits (STW1) for speed control/positioning.....	82
Table 70 – Detailed assignment of the special control word 1 bits (STW1) for speed control mode.....	83
Table 71 – Detailed assignment of the special control word 1 bits (STW1) for the positioning mode.....	83
Table 72 – Overview on the assignment of the bits of control word 2 .....	84
Table 73 – Overview on the assignment of the bits of status word 1.....	84
Table 74 – Detailed assignment of the common status word 1 bits (ZSW1) for the speed control /positioning mode.....	85
Table 75 – Detailed assignment of the special status word 1 bits (ZSW1) for the speed control mode.....	86
Table 76 – Detailed assignment of the special status word 1 bits (ZSW1) for the positioning mode.....	86
Table 77 – Overview on the assignment of the bits of status word 2.....	86
Table 78 – Structure of “Status word bit Pulses Enabled”.....	87
Table 79 – Definition of signal SATZANW .....	98
Table 80 – Definition of signal AKTSATZ .....	98
Table 81 – Definition of signal MDI_MOD.....	98
Table 82 – Signal list – assignment.....	103
Table 83 – Definition of standard telegram 1 .....	105
Table 84 – Definition of standard telegram 2.....	105
Table 85 – Definition of standard telegram 3.....	105
Table 86 – Definition of standard telegram 4.....	106
Table 87 – Definition of standard telegram 5.....	106
Table 88 – Definition of standard telegram 6.....	107
Table 89 – Definition of standard telegram 7.....	107
Table 90 – Definition of standard telegram 9.....	107
Table 91 – Definition of standard telegram 8.....	108
Table 92 – Parameters for configuring a telegram.....	108
Table 93 – Coding of P922 .....	109
Table 94 – Example A/B for normalising DO IO Data, parameter values.....	112
Table 95 – Example A/B for normalising DO IO Data, parameter description elements.....	113
Table 96 – Example C for normalising DO IO Data, parameter values.....	113
Table 97 – Example C for normalising DO IO Data, parameter description elements.....	113
Table 98 – Structure of parameter 979 (sensor format) .....	120
Table 99 – Subindex 0 (header) of parameter 979 .....	120
Table 100 – Subindex 1 (sensor type) of parameter 979 .....	121

Table 101 – Subindex 2 (sensor resolution) of parameter 979.....	121
Table 102 – Assigning Gx_XIST2 (sensor-x position actual value-2).....	125
Table 103 – Error codes in Gx_XIST2.....	126
Table 104 – Sensor control word .....	127
Table 105 – Sensor status word.....	128
Table 106 – States.....	131
Table 107 – Transitions .....	132
Table 108 – Prioritisation of Sensor Control Word.....	135
Table 109 – Example for standard telegram with additional peripheral control.....	140
Table 110 – Fault buffer parameters .....	146
Table 111 – Fault codes examples.....	147
Table 112 – Definition of the fault classes attribute .....	149
Table 113 – Definition of the PROFIdrive fault classes.....	149
Table 114 – Structure of parameter 964 (Drive Unit identification) .....	150
Table 115 – Definition of the Profile identification number.....	150
Table 116 – Structure of parameter 975 (DO identification).....	151
Table 117 – Structure of P975.5 .....	151
Table 118 – DO type class definition in P975.5 .....	151
Table 119 – Assignment of the bits of DO sub class 1 identification in P975.6 .....	152
Table 120 – Structure of parameter 974 (Base Mode Parameter Access identification) .....	153
Table 121 – PROFIdrive I&M parameter definition .....	153
Table 122 – PROFIdrive parameter value definition .....	154
Table 123 – PROFIdrive error code definition .....	154
Table 124 – Specified DO functions for the Application Classes.....	162
Table 125 – Parameter for “Life sign monitoring” .....	163
Table 126 – Parameter for “DO IO DATA-Telegram selection and configuration”.....	163
Table 127 – Parameter for “Sensor interface” .....	164
Table 128 – Parameter for “Fault buffer handling” .....	164
Table 129 – Parameter for “Warning mechanism” .....	164
Table 130 – Parameter for “Closed loop control operating mode” .....	164
Table 131 – Parameter for “Set and store of the local parameter set”.....	164
Table 132 – Parameter for “Set and store complete parameter set”.....	165
Table 133 – Parameter for “Drive reset”.....	165
Table 134 – Parameter for “Operation priority for write parameters”.....	165
Table 135 – Parameter for “DO identification and setup”.....	165
Table 136 – Parameter for “Parameter set identification” .....	166
Table 137 – Parameter for “Device identification” .....	166
Table 138 – Parameter for “Alternative supervisor DO IO Data control channel” .....	166
Table 139 – PROFIdrive Parameter listed by number.....	167
Table 140 – Overview on the assignment of the bits of control word1 for the process technology operating mode .....	177
Table 141 – Overview on the assignment of the bits of status word1 for the process technology operating mode .....	178

Table 142 – Overview on the assignment of the bits of drive status/fault word for the process technology operating mode.....	179
Table 143 – Definition of standard telegram 20 .....	183

This document is a preview generated by EVS

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –****Part 7-203: Generic interface and use  
of profiles for power drive systems –  
Profile type 3 specification****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning the following:

Publication/ Application serial number	Holder	Title	Derwent accession Number	Derwent publication
EP844542	[SI]	Numerical control method and control structure for controlling of movement of objects whereby speed control is effected at a higher rate than position control	1998-274369	EP844542-A1 27.05.1998; DE59603496-G 02.12.1999; EP844542-B1 27.10.1999

The IEC takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured the IEC that he is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with IEC. Information may be obtained from

[SI]	Siemens AG Corporate Intellectual Property Licensing & Transactions Otto-Hahn-Ring 6 81730 Munich Germany
------	--

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

The International Standard IEC 61800-7-203 has been prepared by subcommittee SC 22G: Adjustable speed electric drive systems incorporating semiconductor power converters, of IEC technical committee TC 22: Power electronic systems and equipment.

The text of this standard is based on the following documents:

FDIS	Report on voting
22G/184/FDIS	22G/192/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61800 series, under the general title *Adjustable speed electrical power drive systems*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

## INTRODUCTION

The IEC 61800 series is intended to provide a common set of specifications for adjustable speed electrical power drive systems.

IEC 61800-7 describes a generic interface between control systems and power drive systems. This interface can be embedded in the control system. The control system itself can also be located in the drive (sometimes known as "smart drive" or "intelligent drive").

A variety of physical interfaces is available (analogue and digital inputs and outputs, serial and parallel interfaces, fieldbuses and networks). Profiles based on specific physical interfaces are already defined for some application areas (e.g. motion control) and some device classes (e.g. standard drives, positioner). The implementations of the associated drivers and application programmers interfaces are proprietary and vary widely.

IEC 61800-7 defines a set of common drive control functions, parameters, and state machines or description of sequences of operation to be mapped to the profiles.

IEC 61800-7 provides a way to access functions and data of a drive that is independent of the used drive profile and communication interface. The objective is a common drive model with generic functions and objects suitable to be mapped on different communication interfaces. This makes it possible to provide common implementations of motion control (or velocity control or drive control applications) in controllers without any specific knowledge of the drive implementation.

There are several reasons to define a generic interface:

### For a drive device manufacturer

- Less effort to support system integrators
- Less effort to describe drive functions because of common terminology
- The selection of drives does not depend on availability of specific support

### For a control device manufacturer

- No influence of bus technology
- Easy device integration
- Independent of a drive supplier

### For a system integrator (builds modules, machines, plants etc.)

- Less integration effort for devices
- Only one understandable way of modeling
- Independent of bus technology

Much effort is needed to design a motion control application with several different drives and a specific control system. The tasks to implement the system software and to understand the functional description of the individual components may exhaust the project resources. In some cases, the drives do not share the same physical interface. Some control devices just support a single interface which will not be supported by a specific drive. On the other hand, the functions and data structures are specified with incompatibilities. It is up to the systems integrator to write interfaces to the application software to handle that which should not be his responsibility.

Some applications need device exchangeability or integration of new devices in an existing configuration. They are faced with different incompatible solutions. The efforts to adopt a solution to a drive profile and to manufacturer specific extensions may be unacceptable. This will reduce the degree of freedom to select a device best suited for this application to the selection of the unit which will be available for a specific physical interface and supported by the controller.

IEC 61800-7-1 is divided into a generic part and several annexes as shown in Figure 1. The drive profile types for CiA 402<sup>1</sup>, CIP Motion<sup>TM2</sup>, PROFIdrive<sup>3</sup> and SERCOS Interface<sup>TM4</sup> are mapped to the generic interface in the corresponding annex. The annexes have been submitted by open international network or fieldbus organizations which are responsible for the content of the related annex and use of the related trademarks.

This part of IEC 61800-7 specifies the profile type 3 (PROFIdrive).

The profile types 1, 2 and 4 are specified in IEC 61800-7-201, IEC 61800-7-202 and IEC 61800-7-204.

IEC 61800-7-301, IEC 61800-7-302, IEC 61800-7-303 and IEC 61800-7-304 specify how the profile types 1, 2, 3 and 4 are mapped to different network technologies (such as CANopen<sup>5</sup>, EtherCAT<sup>TM6</sup>, Ethernet Powerlink<sup>TM7</sup>, DeviceNet<sup>TM8</sup>, ControlNet<sup>TM9</sup>, EtherNet/IP<sup>TM10</sup>, PROFIBUS<sup>11</sup>, PROFINET<sup>12</sup> and SERCOS Interface).

- 
- 1 CiA 402 is a trade name of CAN in Automation, e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name CiA 402.
  - 2 CIP Motion™ is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name CIP Motion™. Use of the trade name CIP Motion™ requires permission of Open DeviceNet Vendor Association, Inc.
  - 3 PROFIdrive is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIdrive. Use of the trade name PROFIdrive requires permission of PROFIBUS International.
  - 4 SERCOS™ and SERCOS Interface™ are trade names of SERCOS International e.V. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name SERCOS and SERCOS interface. Use of the trade name SERCOS and SERCOS interface requires permission of the trade name holder.
  - 5 CANopen is an acronym for Controller Area Network *open* and is used to refer to EN 50325-4.
  - 6 EtherCAT™ is a trade name of Beckhoff, Verl. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherCAT™. Use of the trade name EtherCAT™ requires permission of the trade name holder.
  - 7 Ethernet Powerlink™ is a trade name of B&R, control of trade name use is given to the non profit organisation EPSG. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name Ethernet Powerlink™. Use of the trade name Ethernet Powerlink™ requires permission of the trade name holder.
  - 8 DeviceNet™ is a trade name of Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name DeviceNet™. Use of the trade name DeviceNet™ requires permission of Open DeviceNet Vendor Association, Inc.
  - 9 ControlNet™ is a trade name of ControlNet International, Ltd. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name ControlNet™. Use of the trade name ControlNet™ requires permission of ControlNet International, Ltd.
  - 10 EtherNet/IP™ is a trade name of ControlNet International, Ltd. and Open DeviceNet Vendor Association, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this profile does not require use of the trade name EtherNet/IP™. Use of the trade name EtherNet/IP™ requires permission of either ControlNet International, Ltd. or Open DeviceNet Vendor Association, Inc.
  - 11 PROFIBUS is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFIBUS. Use of the trade name PROFIBUS requires permission of PROFIBUS International.
  - 12 PROFINET is a trade name of PROFIBUS International. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trade name holder or any of its products. Compliance to this profile does not require use of the trade name PROFINET. Use of the trade name PROFINET requires permission of PROFIBUS International.

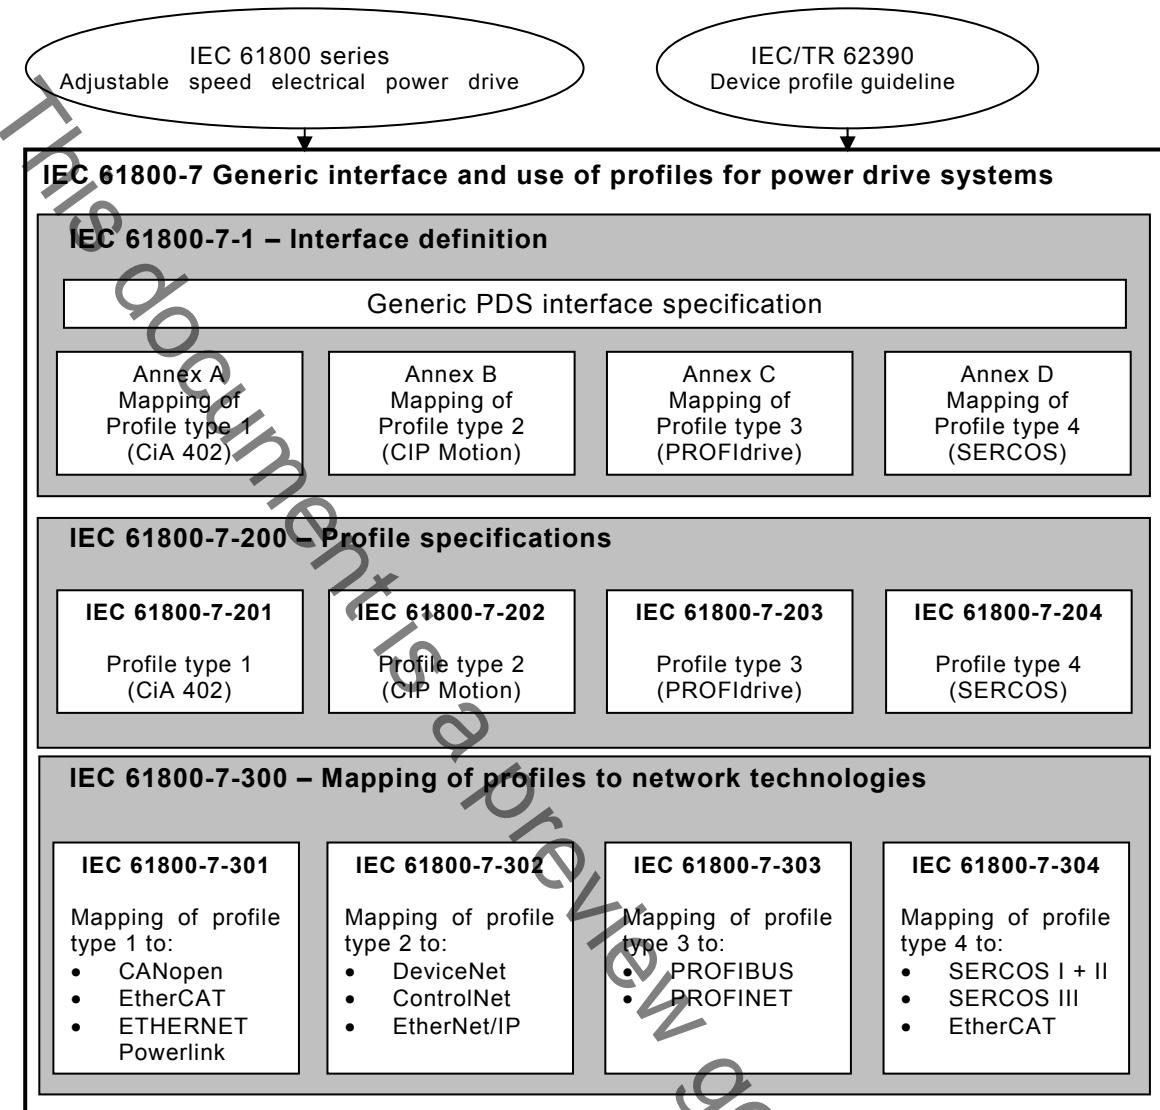


Figure 1 – Structure of IEC 61800-7

**ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –****Part 7-203: Generic interface and use  
of profiles for power drive systems –  
Profile type 3 specification****1 Scope**

IEC 61800-7 specifies profiles for Power Drive Systems (PDS) and their mapping to existing communication systems by use of a generic interface model.

The functions specified in this part of IEC 61800-7 are not intended to ensure functional safety. This requires additional measures according to the relevant standards, agreements and laws.

This part of IEC 61800-7 specifies profile type 3 for Power Drive Systems (PDS). Profile type 3 can be mapped onto different communication network technologies.

**2 Normative references**

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61158-5-3, *Industrial communication networks – Fieldbus specifications – Part 5-3 (Ed.1.0): Application layer service definition – Type 3 elements*

IEC 61158-5-10, *Industrial communication networks – Fieldbus specifications – Part 5-10 (Ed.1.0): Application layer service definition – Type 10 elements*

IEC 61158-6-3, *Industrial communication networks – Fieldbus specifications – Part 6-3 (Ed.1.0): Application layer protocol specification – Type 3 elements*

IEC 61158-6-10, *Industrial communication networks – Fieldbus specifications – Part 6-10 (Ed.1.0): Application layer protocol specification – Type 10 elements*

IEC 61800-7 (all parts), *Adjustable speed electrical power drive systems – Generic interface and use of profiles for power drive systems*

IEC 61800-7-1, *Adjustable speed electrical power drive systems – Part 7-1: Generic interface and use of profiles for power drive systems – Interface definition*

IEC 61800-7-303, *Adjustable speed electrical power drive systems – Part 7-303: Generic interface and use of profiles for power drive systems – Mapping of profile type 3 to network technologies*