

REGULEERITAVA KIIRUSEGA
ELEKTRIAJAMISÜSTEEMID. OSA 5-2: OHUTUSNÕUDED.
FUNKTSIONAALSUS

Adjustable speed electrical power drive systems - Part
5-2: Safety requirements - Functional

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

See Eesti standard EVS-EN 61800-5-2:2017 sisaldab Euroopa standardi EN 61800-5-2:2017 ingliskeelset teksti.	This Estonian standard EVS-EN 61800-5-2:2017 consists of the English text of the European standard EN 61800-5-2:2017.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation.
Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 28.04.2017.	Date of Availability of the European standard is 28.04.2017.
Standard on kättesaadav Eesti Standardikeskusest.	The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile standardiosakond@evs.ee.

ICS 13.110, 29.200

Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:

Koduleht www.evs.ee; telefon 605 5050; e-post info@evs.ee

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:

Homepage www.evs.ee; phone +372 605 5050; e-mail info@evs.ee

English Version

**Adjustable speed electrical power drive systems - Part 5-2:
Safety requirements - Functional
(IEC 61800-5-2:2016)**

Entraînements électriques de puissance à vitesse variable -
Partie 5-2: Exigences de sécurité - Fonctionnelle
(IEC 61800-5-2:2016)

Elektrische Leistungsantriebssysteme mit einstellbarer
Drehzahl - Teil 5-2: Anforderungen an die Sicherheit -
Funktionale Sicherheit
(IEC 61800-5-2:2016)

This European Standard was approved by CENELEC on 2016-05-23. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

The text of document 22G/332/FDIS, future edition 2 of IEC 61800-5-2, prepared by SC 22G "Adjustable speed electric drive systems incorporating semiconductor power converters" of IEC/TC 22 "Power electronic systems and equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 61800-5-2:2017.

The following dates are fixed:

- latest date by which the document has to be (dop) 2017-10-28
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2020-04-28
standards conflicting with the
document have to be withdrawn

This document supersedes EN 61800-5-2:2007.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association.

Endorsement notice

The text of the International Standard IEC 61800-5-2:2016 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60300-3-1:2003	NOTE	Harmonized as 60300-3-1:2003.
IEC 60664-1:2007	NOTE	Harmonized as EN 60664-1:2007.
IEC 606643	NOTE	Harmonized as EN 60664-3.
IEC 61025	NOTE	Harmonized as EN 61025.
IEC 61078	NOTE	Harmonized as EN 61078.
IEC 61165	NOTE	Harmonized as EN 61165.
IEC 61508-4:2010	NOTE	Harmonized as EN 61508-4:2010.
IEC 61508-5:2010	NOTE	Harmonized as EN 61508-5:2010.
IEC 61511 (series)	NOTE	Harmonized as EN 61511 (series).
IEC 61511-1	NOTE	Harmonized as EN 61511-1.
IEC 61513	NOTE	Harmonized as EN 61513.
IEC 61558 (series)	NOTE	Harmonized as EN 61558 (series).
IEC 61558-1:2005	NOTE	Harmonized as EN 61558-1:2005.
IEC 61558-1:2005/AMD1:2009	NOTE	Harmonized as EN 61558-1:2005/A1:2009.

IEC 61784-3

NOTE Harmonized as EN 61784-3.

IEC 62061

NOTE Harmonized as EN 62061.

ISO 13849-2

NOTE Harmonized as EN ISO 13849-2.

This document is a preview generated by EVS

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60204-1	-	Safety of machinery - Electrical equipment of machines -- Part 1: General requirements	EN 60204-1	-
IEC 61000-2-4	2002	Electromagnetic compatibility (EMC) -- Part 2-4: Environment - Compatibility levels in industrial plants for low-frequency conducted disturbances	EN 61000-2-4	2002
IEC 61000-4-2	2008	Electromagnetic compatibility (EMC) -- Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	EN 61000-4-2	2009
IEC 61000-4-3	2006	Electromagnetic compatibility (EMC) -- Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	EN 61000-4-3	2006
+ A1	2007		+ A1	2008
+ A2	2010		+ A2	2010
IEC 61000-4-4	2012	Electromagnetic compatibility (EMC) -- Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	EN 61000-4-4	2012
IEC 61000-4-5	2014	Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test	EN 61000-4-5	2014
IEC 61000-4-6	2013	Electromagnetic compatibility (EMC) -- Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	EN 61000-4-6	2014
IEC 61000-4-29	2000	Electromagnetic compatibility (EMC) -- Part 4-29: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests	EN 61000-4-29	2000
IEC 61000-4-34	2005	Electromagnetic compatibility (EMC) -- Part 4-34: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests for equipment with input current more than 16 A per phase	EN 61000-4-34	2007
IEC 61000-6-7	2014	Electromagnetic compatibility (EMC) - Part 6-7: Generic standards - Immunity requirements for equipment intended to perform functions in a safety-related system (functional safety) in industrial locations	EN 61000-6-7	2015

IEC 61400-21	2008	Wind turbines -- Part 21: Measurement and assessment of power quality characteristics of grid connected wind turbines	EN 61400-21	2008
IEC 61508-1	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems -- Part 1: General requirements	EN 61508-1	2010
IEC 61508-2	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems -- Part 2: Requirements for electrical/electronic/programmable electronic safety-related systems	EN 61508-2	2010
IEC 61508-3	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems -- Part 3: Software requirements	EN 61508-3	2010
IEC 61508-6	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems -- Part 6: Guidelines on the application of IEC 61508-2 and IEC 61508-3	EN 61508-6	2010
IEC 61508-7	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems -- Part 7: Overview of techniques and measures	EN 61508-7	2010
IEC 61800-1	-	Adjustable speed electrical power drive systems -- Part 1: General requirements - Rating specifications for low voltage adjustable speed d.c. power drive systems	EN 61800-1	-
IEC 61800-2	2015	Adjustable speed electrical power drive systems -- Part 2: General requirements - Rating specifications for low voltage adjustable speed a.c. power drive systems	EN 61800-2	2015
IEC 61800-3	2004	Adjustable speed electrical power drive systems -- Part 3: EMC requirements and specific test methods	EN 61800-3	2004
IEC 61800-4	-	Adjustable speed electrical power drive systems -- Part 4: General requirements - Rating specifications for a.c. power drive systems above 1 000 V a.c. and not exceeding 35 kV	EN 61800-4	-
IEC 61800-5-1	2007	Adjustable speed electrical power drive systems - Part 5-1: Safety requirements - Electrical, thermal and energy	EN 61800-5-1	2007
ISO 13849-1	2006	Safety of machinery - Safety-related parts of control systems -- Part 1: General principles for design	-	-
ISO 13849-2	2012	Safety of machinery - Safety-related parts of control systems -- Part 2: Validation	EN ISO 13849-2	2012

CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
2 Normative references.....	10
3 Terms and definitions	12
4 Designated <i>safety sub-functions</i>	18
4.1 General.....	18
4.2 <i>Safety sub-functions</i>	19
4.2.1 General	19
4.2.2 Limit values	20
4.2.3 Stopping functions	20
4.2.4 Monitoring functions.....	21
4.2.5 Output functions – Safe brake control (SBC).....	23
5 Management of <i>functional safety</i>	23
5.1 Objective	23
5.2 Requirements for the management of <i>functional safety</i>	23
5.3 <i>PDS(SR)</i> development lifecycle	23
5.4 Planning of <i>PDS(SR) functional safety</i> management	24
5.5 Safety requirements specification (<i>SRS</i>) for a <i>PDS(SR)</i>	26
5.5.1 General	26
5.5.2 <i>Safety sub-functions</i> requirements specification.....	26
5.5.3 <i>Safety integrity</i> requirements specification	27
5.6 <i>PDS(SR)</i> safety system architecture specification	28
5.6.1 General	28
5.6.2 Requirements for safety system architecture specification.....	28
6 Requirements for design and development of a <i>PDS(SR)</i>	29
6.1 General requirements.....	29
6.1.1 Change in operational status	29
6.1.2 Design standards	29
6.1.3 Realisation.....	29
6.1.4 <i>Safety integrity</i> and fault detection.....	29
6.1.5 Safety and non- <i>safety sub-functions</i>	30
6.1.6 <i>SIL</i> for multiple <i>safety sub-functions</i> within one <i>PDS(SR)</i>	30
6.1.7 Integrated circuits with on-chip redundancy	31
6.1.8 Software requirements	31
6.1.9 Design documentation.....	31
6.2 <i>PDS(SR)</i> design requirements	31
6.2.1 Basic and well-tried safety principles	31
6.2.2 Requirements for the estimation of the probability of dangerous random hardware failures per hour (<i>PFH</i>).....	31
6.2.3 Architectural constraints.....	34
6.2.4 Estimation of <i>safe failure fraction (SFF)</i>	35
6.2.5 Requirements for <i>systematic safety integrity</i> of a <i>PDS(SR)</i> and <i>PDS(SR) subsystems</i>	36
6.2.6 Design requirements for electromagnetic (EM) immunity of a <i>PDS(SR)</i>	39
6.2.7 Design requirements for thermal immunity of a <i>PDS(SR)</i>	39

6.2.8	Design requirements for mechanical immunity of a <i>PDS(SR)</i>	39
6.3	Behaviour on detection of fault	39
6.3.1	Fault detection	39
6.3.2	Fault tolerance greater than zero.....	39
6.3.3	Fault tolerance zero	39
6.4	Additional requirements for data communications.....	39
6.5	<i>PDS(SR)</i> integration and testing requirements	40
6.5.1	Hardware integration.....	40
6.5.2	Software integration	40
6.5.3	Modifications during integration	40
6.5.4	Applicable integration tests	40
6.5.5	Test documentation.....	40
7	Information for use	41
7.1	General.....	41
7.2	Information and instructions for safe application of a <i>PDS(SR)</i>	41
8	<i>Verification and validation</i>	42
8.1	General.....	42
8.2	<i>Verification</i>	43
8.3	<i>Validation</i>	43
8.4	Documentation.....	43
9	Test requirements.....	43
9.1	Planning of tests	43
9.2	Functional testing.....	43
9.3	Electromagnetic (EM) immunity testing	44
9.3.1	General	44
9.3.2	Intended EM environment.....	44
9.3.3	Performance criterion (fail safe state – FS).....	44
9.4	Thermal immunity testing	44
9.4.1	General	44
9.4.2	Functional thermal test.....	45
9.4.3	Component thermal test	45
9.5	Mechanical immunity testing.....	45
9.5.1	General	45
9.5.2	Vibration test	45
9.5.3	Shock test.....	45
9.5.4	Performance criterion for mechanical immunity tests (fail safe state – FS).....	45
9.6	Test documentation.....	45
10	Modification.....	46
10.1	Objective	46
10.2	Requirements.....	46
10.2.1	General	46
10.2.2	Modification request.....	46
10.2.3	Impact analysis	46
10.2.4	Authorization.....	46
10.2.5	Documentation.....	46
Annex A (informative)	Sequential task table.....	47
Annex B (informative)	Example for estimation of <i>PFH</i>	51

B.1	General.....	51
B.2	Example <i>PDS(SR)</i> structure	51
B.2.1	General	51
B.2.2	<i>Subsystem A/B</i>	52
B.2.3	<i>Subsystem PS/VM</i>	52
B.3	Example <i>PDS(SR)</i> PFH value determination	53
B.3.1	<i>Subsystem “A/B” (main subsystem)</i>	53
B.3.2	<i>Subsystem “PS/VM”</i>	58
B.3.3	PFH value of the <i>safety sub-function STO</i> of <i>PDS(SR)</i>	61
B.4	Reduction of DC and SFF depending on test interval	62
Annex C (informative)	Available failure rate databases	63
C.1	Databases	63
C.2	Helpful standards concerning component failure	63
Annex D (informative)	Fault lists and fault exclusions	65
D.1	General.....	65
D.2	Remarks applicable to fault exclusions	65
D.2.1	Validity of exclusions.....	65
D.2.2	Tin whisker growth	65
D.2.3	Short-circuits on PWB-mounted parts	65
D.3	Fault models	66
D.3.1	Conductors/cables	66
D.3.2	Printed wiring boards/assemblies	66
D.3.3	Terminal block	66
D.3.4	Multi-pin connector.....	67
D.3.5	Electromechanical devices	67
D.3.6	Transformers	68
D.3.7	Inductances	68
D.3.8	Resistors	68
D.3.9	Resistor Networks	68
D.3.10	Potentiometers.....	68
D.3.11	Capacitors	68
D.3.12	Discrete semiconductors	68
D.3.13	Signal Isolation components.....	69
D.3.14	Non-programmable integrated circuits	69
D.3.15	Programmable and/or complex integrated circuits	69
D.3.16	Motion and position feedback sensors	70
Annex E (normative)	Electromagnetic (EM) immunity requirement for <i>PDS(SR)</i>	74
E.1	General.....	74
E.2	Immunity requirements – low frequency disturbances	74
E.3	Immunity requirements – high frequency disturbances	77
Annex F (informative)	Estimation of PFD_{avg} value for low demand with given PFH value	81
F.1	General.....	81
F.2	Estimation of PFD_{avg} value for low demand with given PFH value	81
Bibliography	82
Figure 1	– Installation and functional parts of a <i>PDS(SR)</i>	10
Figure 2	– <i>Safety function</i> consisting of <i>safety sub-functions</i>	19

Figure 3 – <i>PDS(SR)</i> development lifecycle	24
Figure B.1 – Example <i>PDS(SR)</i>	51
Figure B.2 – <i>Subsystems</i> of the <i>PDS(SR)</i>	52
Figure B.3 – Function blocks of <i>subsystem A/B</i>	53
Figure B.4 – Reliability model (Markov) of <i>subsystem A/B</i>	56
Figure B.5 – Function blocks of <i>subsystem PS/VM</i>	58
Figure B.6 – Reliability model (Markov) of <i>subsystem PS/VM</i>	60
Table 1 – Alphabetical list of terms and definitions	12
Table 2 – Example for determining the <i>SIL</i> from hardware and software independence	30
Table 3 – <i>Safety integrity levels</i> : target failure measures for a <i>PDS(SR)</i> <i>safety sub-function</i>	32
Table 4 – Maximum allowable safety integrity level for a <i>safety sub-function</i> carried out by a type A safety-related <i>subsystem</i>	35
Table 5 – Maximum allowable safety integrity level for a <i>safety sub-function</i> carried out by a type B safety-related <i>subsystem</i>	35
Table A.1 – Design and development procedure for <i>PDS(SR)</i>	47
Table B.1 – Determination of DC factor of <i>subsystem A/B</i>	55
Table B.2 – <i>PFH</i> value calculation results for <i>subsystem A/B</i>	58
Table B.3 – Determination of DC factor of <i>subsystem A/B</i>	59
Table B.4 – <i>PFH</i> value calculation results for <i>subsystem PS/VM</i>	61
Table D.1 – Printed wiring boards/assemblies	66
Table D.2 – Terminal block	67
Table D.3 – Multi-pin connector	67
Table D.4 – Electromechanical devices (for example relay, contactor relays)	68
Table D.5 – Signal Isolation components	69
Table D.6 – Non-programmable integrated circuits	69
Table D.7 – Programmable and/or complex integrated circuits	70
Table D.8 – Motion and position feedback sensors	71
Table E.1 – Minimum immunity requirements for voltage deviations, dips and short interruptions	75
Table E.2 – <i>PDS(SR)</i> minimum immunity requirements for voltage deviations, dips and short interruptions on main power ports with a rated voltage above 1 000 V	76
Table E.3 – Immunity requirements – high frequency disturbances	77
Table E.4 – General frequency ranges for mobile transmitters and ISM for radiated tests	79
Table E.5 – General frequency ranges for mobile transmitters and ISM for conducted tests	80

INTRODUCTION

As a result of automation, demand for increased production and reduced operator physical effort, control systems of machinery and plant items play an increasing role in the achievement of overall safety. These control systems increasingly employ complex electrical/electronic/programmable electronic devices and systems.

Prominent amongst these devices and systems are adjustable speed electrical power drive systems (PDS) that are suitable for use in safety-related applications (*PDS(SR)*).

Examples of industrial applications are:

- machine tools, robots, production test equipment, test benches;
- papermaking machines, textile production machines, calendars in the rubber industry;
- process lines in plastics, chemicals or metal production, rolling-mills;
- cement crushing machines, cement kilns, mixers, centrifuges, extrusion machines;
- drilling machines;
- conveyors, materials handling machines, hoisting equipment (cranes, gantries, etc.);
- pumps, fans, etc.

This standard can also be used as a reference for developers using *PDS(SR)* for other applications.

Users of this standard should be aware that some type C standards for machinery currently refer to ISO 13849-1 for safety-related control systems. In this case, *PDS(SR)* manufacturers may be requested to provide further information (e.g. category and performance level PL) to facilitate the integration of a *PDS(SR)* into the safety-related control systems of such machinery.

NOTE "Type C standards" are defined in ISO 12100 as machine safety standards dealing with detailed safety requirements for a particular machine or group of machines.

There are many situations where control systems that incorporate a *PDS(SR)* are employed, for example as part of safety measures that have been provided to achieve risk reduction. A typical case is guard interlocking in order to exclude personnel from *hazards* where access to the dangerous area is only possible when rotating parts have stopped. This part of IEC 61800 gives a methodology to identify the contribution made by a *PDS(SR)* to identified *safety sub-functions* and to enable the appropriate design of the *PDS(SR)* and verification that it meets the required performance.

Measures are given to co-ordinate the safety performance of the *PDS(SR)* with the intended risk reduction taking into account the probabilities and consequences of its random and systematic faults.

ADJUSTABLE SPEED ELECTRICAL POWER DRIVE SYSTEMS –

Part 5-2: Safety requirements – Functional

1 Scope

This part of IEC 61800, which is a product standard, specifies requirements and makes recommendations for the design and development, integration and validation of safety related power drive systems (*PDS(SR)*) in terms of their functional safety considerations. It applies to adjustable speed electrical power drive systems covered by the other parts of the IEC 61800 series of standards as referred in IEC 61800-2.

NOTE 1 The term “integration” refers to the *PDS(SR)* itself, not to its incorporation into the safety-related application.

NOTE 2 Other parts of IEC 61800 cover rating specifications, EMC, electrical safety, etc.

This International Standard is applicable where functional safety of a *PDS(SR)* is claimed and the *PDS(SR)* is operating mainly in the high demand or continuous mode (see 3.15)

While low demand mode operation is possible for a *PDS(SR)*, this standard concentrates on high demand and continuous mode. *Safety sub-functions* implemented for high demand or continuous mode can also be used in low demand mode. Requirements for low demand mode are given in IEC 61508 series. Some guidance for the estimation of average probability of dangerous failure on demand (PFD_{avg}) value is provided in Annex F.

This part of IEC 61800 sets out safety-related considerations of *PDS(SR)*s in terms of the framework of IEC 61508, and introduces requirements for *PDS(SR)*s as *subsystems* of a safety-related system. It is intended to facilitate the realisation of the electrical/ electronic/ programmable electronic (E/E/PE) parts of a *PDS(SR)* in relation to the safety performance of *safety sub-function(s)* of a PDS.

Manufacturers and suppliers of *PDS(SR)*s by using the normative requirements of this part of IEC 61800 will indicate to users (system integrator, original equipment manufacturer) the safety performance for their equipment. This will facilitate the incorporation of a *PDS(SR)* into a safety-related control system using the principles of IEC 61508, and possibly its specific sector implementations (for example IEC 61511, IEC 61513, IEC 62061 or ISO 13849).

By applying the requirements from this part of the IEC 61800 series, the corresponding requirements of IEC 61508 that are necessary for a *PDS(SR)* are fulfilled.

This part of IEC 61800 does not specify requirements for:

- the *hazard* and risk analysis of a particular application;
- the identification of *safety sub-functions* for that application;
- the initial allocation of *SILs* to those *safety sub-functions*;
- the driven equipment except for interface arrangements;
- secondary *hazards* (for example from failure in a production or manufacturing process);
- the electrical, thermal and energy safety considerations, which are covered in +IEC 61800-5-1;
- the *PDS(SR)* manufacturing process;
- the validity of signals and commands to the *PDS(SR)*.

- security aspects (e.g. cyber security or *PDS(SR)* security of access)

NOTE 3 The functional safety requirements of a *PDS(SR)* are dependent on the application, and can be considered as a part of the overall risk assessment of the *installation*. Where the supplier of the *PDS(SR)* is not responsible for the driven equipment, the *installation* designer is responsible for the risk assessment, and for specifying the functional and safety integrity requirements of the *PDS(SR)*.

This part of IEC 61800 only applies to *PDS(SR)*s implementing *safety sub-functions* with a *SIL* not greater than *SIL* 3.

Figure 1 shows the installation and the functional parts of a *PDS(SR)* that are considered in this part of IEC 61800 and shows a logical representation of a *PDS(SR)* rather than its physical description.

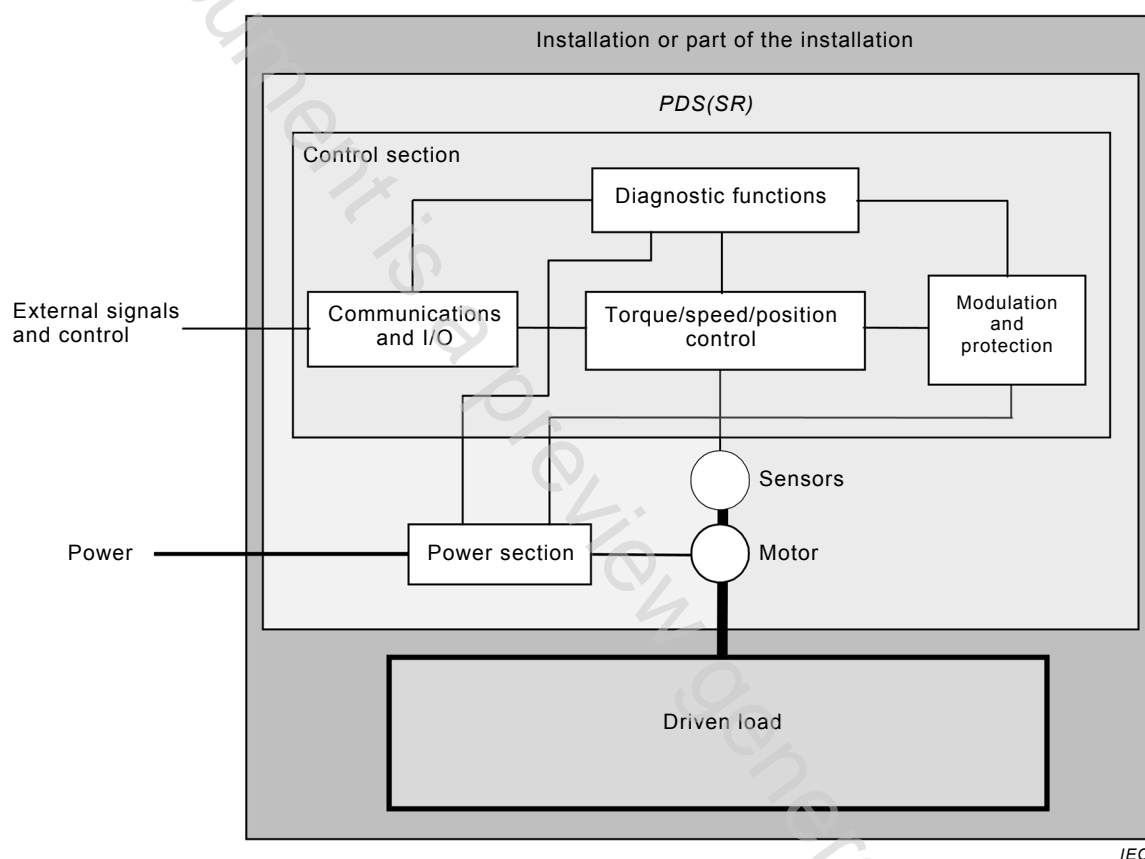


Figure 1 – Installation and functional parts of a *PDS(SR)*

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60204-1, *Safety of machinery – Electrical equipment of machines – Part 1: General requirements*

IEC 61000-2-4:2002, *Electromagnetic compatibility (EMC) – Part 2-4: Environment – Compatibility levels in industrial plants for low-frequency conducted disturbances*

IEC 61000-4-2:2008, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*