

**AUDIO-, VIDEO-, INFORMATSIOONI- JA
SIDETEHNOLOOGIA SEADMED. OSA 1: OHUTUSNÕUDED**

**Audio/video, information and communication
technology equipment - Part 1: Safety requirements**

EESTI STANDARDI EESSÕNA**NATIONAL FOREWORD**

See Eesti standard EVS-EN IEC 62368-1:2020 +A11:2020 sisaldab Euroopa standardi EN IEC 62368-1:2020 ja selle muudatuste A11:2020 ingliskeelset teksti.	This Estonian standard EVS-EN IEC 62368-1:2020 +A11:2020 consists of the English text of the European standard EN IEC 62368-1:2020 and its amendment A11:2020.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas. Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 06.03.2020, muudatus A11 06.03.2020.	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation. Date of Availability of the European standard is 06.03.2020, for A11 06.03.2020.
Sellesse standardisse on muudatus A11 sisse viidud ja tehtud muudatused tähistatud topeltpüstkriipsuga lehe välisveerisel. Selles standardis on rahvusvahelise standardi ühismuudatused tähistatud püstkriipsuga teksti välimisel veerisel. Standard on kättesaadav Eesti Standardikeskusest.	The amendment A11 has been incorporated into this standard and changes have been marked by a double vertical line on the outer row of the page. Common modifications have been incorporated into this international standard and changes have been marked by a vertical line on the outer row of the page. The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile standardiosakond@evs.ee.

ICS 33.160.01; 35.020

Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega: Koduleht www.evs.ee; telefon 605 5050; e-post info@evs.ee

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:

Homepage www.evs.ee; phone +372 605 5050; e-mail info@evs.ee

English Version

**Audio/video, information and communication technology
equipment - Part 1: Safety requirements
(IEC 62368-1:2018)**

Équipements des technologies de l'audio/vidéo, de
l'information et de la communication - Partie 1: Exigences
de sécurité
(IEC 62368-1:2018)

Einrichtungen für Audio/Video-, Informations- und
Kommunikationstechnik - Teil 1: Sicherheitsanforderungen
(IEC 62368-1:2018)

This European Standard was approved by CENELEC on 2020-01-06. Amendment A11 was approved by CENELEC on 2020-01-06. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard and its Amendment A11 the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard and its Amendment A11 exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

This document (EN IEC 62368-1:2020) consists of the text of IEC 62368-1:2018 prepared by IEC/TC 108 "Safety of electronic equipment within the field of audio/video, information technology and communication technology".

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2021-01-06
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2023-01-06

This document supersedes EN 60950-22:2017, EN 60950-23:2006 and EN 62368-1:2014 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Endorsement notice

The text of the International Standard IEC 62368-1:2018 was approved by CENELEC as a European Standard without any modification.

Amendment A11 European foreword

This document (EN IEC 62368-1:2020/A11:2020) has been prepared by CLC/TC 108X "Safety of electronic equipment within the fields of Audio/Video, Information Technology and Communication Technology".

This document amends EN IEC 62368-1:2020.

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2021-01-06
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2023-01-06

Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z".

This document is a preview generated by EVS

CONTENTS

FOREWORD.....	20
INTRODUCTION.....	22
0 Principles of this product safety standard	22
0.1 Objective	22
0.2 Persons	22
0.2.1 General	22
0.2.2 Ordinary person.....	22
0.2.3 Instructed person.....	22
0.2.4 Skilled person.....	22
0.3 Model for pain and injury.....	22
0.4 Energy sources	23
0.5 Safeguards	24
0.5.1 General	24
0.5.2 Equipment safeguard.....	25
0.5.3 Installation safeguard	25
0.5.4 Personal safeguard.....	25
0.5.5 Behavioural safeguards	25
0.5.6 Safeguards during ordinary or instructed person service conditions	26
0.5.7 Equipment safeguards during skilled person service conditions	26
0.5.8 Examples of safeguard characteristics.....	26
0.6 Electrically-caused pain or injury (electric shock)	27
0.6.1 Models for electrically-caused pain or injury	27
0.6.2 Models for protection against electrically-caused pain or injury.....	28
0.7 Electrically-caused fire.....	29
0.7.1 Models for electrically-caused fire.....	29
0.7.2 Models for protection against electrically-caused fire	29
0.8 Injury caused by hazardous substances	30
0.9 Mechanically-caused injury	30
0.10 Thermally-caused injury (skin burn)	31
0.10.1 Models for thermally-caused injury	31
0.10.2 Models for protection against thermally-caused pain or injury	32
0.11 Radiation-caused injury	33
1 Scope.....	34
2 Normative references	35
3 Terms, definitions and abbreviated terms	41
3.1 Energy source abbreviations	41
3.2 Other abbreviations	42
3.3 Terms and definitions.....	42
3.3.1 Circuit terms	46
3.3.2 Enclosure terms.....	46
3.3.3 Equipment terms	47
3.3.4 Flammability terms	48
3.3.5 Electrical insulation.....	49
3.3.6 Miscellaneous.....	50
3.3.7 Operating and fault conditions	51

3.3.8	Persons	52
3.3.9	Potential ignition sources	53
3.3.10	Ratings	53
3.3.11	Safeguards	54
3.3.12	Spacings	55
3.3.13	Temperature controls	56
3.3.14	Voltages and currents	56
3.3.15	Classes of equipment with respect to protection from electric shock	57
3.3.16	Chemical terms	57
3.3.17	Batteries	58
3.3.18	FIW terms	58
3.3.19	Sound exposure	59
4	General requirements	59
4.1	General	59
4.1.1	Application of requirements and acceptance of materials, components and subassemblies	59
4.1.2	Use of components	60
4.1.3	Equipment design and construction	60
4.1.4	Equipment installation	60
4.1.5	Constructions and components not specifically covered	61
4.1.6	Orientation during transport and use	61
4.1.7	Choice of criteria	61
4.1.8	Liquids and liquid filled components (LFC)	61
4.1.9	Electrical measuring instruments	61
4.1.10	Temperature measurements	62
4.1.11	Steady state conditions	62
4.1.12	Hierarchy of safeguards	62
4.1.13	Examples mentioned in this document	62
4.1.14	Tests on parts or samples separate from the end-product	62
4.1.15	Markings and instructions	62
4.2	Energy source classifications	62
4.2.1	Class 1 energy source	62
4.2.2	Class 2 energy source	63
4.2.3	Class 3 energy source	63
4.2.4	Energy source classification by declaration	63
4.3	Protection against energy sources	63
4.3.1	General	63
4.3.2	Safeguards for protection of an ordinary person	63
4.3.3	Safeguards for protection of an instructed person	64
4.3.4	Safeguards for protection of a skilled person	65
4.3.5	Safeguards in a restricted access area	66
4.4	Safeguards	66
4.4.1	Equivalent materials or components	66
4.4.2	Composition of a safeguard	66
4.4.3	Safeguard robustness	66
4.4.4	Displacement of a safeguard by an insulating liquid	68
4.4.5	Safety interlocks	69
4.5	Explosion	69
4.5.1	General	69

4.5.2	Requirements	69
4.6	Fixing of conductors	69
4.6.1	Requirements	69
4.6.2	Compliance criteria	70
4.7	Equipment for direct insertion into mains socket-outlets	70
4.7.1	General	70
4.7.2	Requirements	70
4.7.3	Compliance criteria	70
4.8	Equipment containing coin / button cell batteries	70
4.8.1	General	70
4.8.2	Instructional safeguard	70
4.8.3	Construction	71
4.8.4	Tests	71
4.8.5	Compliance criteria	72
4.9	Likelihood of fire or shock due to entry of conductive objects	72
4.Z1	73
4.10	Components requirements	73
4.10.1	Disconnect device	73
4.10.2	Switches and relays	73
5	Electrically-caused injury	73
5.1	General	73
5.2	Classification and limits of electrical energy sources	73
5.2.1	Electrical energy source classifications	73
5.2.2	Electrical energy source ES1 and ES2 limits	74
5.3	Protection against electrical energy sources	79
5.3.1	General	79
5.3.2	Accessibility to electrical energy sources and safeguards	79
5.4	Insulation materials and requirements	81
5.4.1	General	81
5.4.2	Clearances	85
5.4.3	Creepage distances	95
5.4.4	Solid insulation	99
5.4.5	Antenna terminal insulation	108
5.4.6	Insulation of internal wire as a part of a supplementary safeguard	108
5.4.7	Tests for semiconductor components and for cemented joints	109
5.4.8	Humidity conditioning	109
5.4.9	Electric strength test	109
5.4.10	Safeguards against transient voltages from external circuits	112
5.4.11	Separation between external circuits and earth	114
5.4.12	Insulating liquid	116
5.5	Components as safeguards	116
5.5.1	General	116
5.5.2	Capacitors and RC units	117
5.5.3	Transformers	118
5.5.4	Optocouplers	118
5.5.5	Relays	118
5.5.6	Resistors	118
5.5.7	SPDs	119

5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable	119
5.5.9	Safeguards for socket-outlets in outdoor equipment.....	120
5.6	Protective conductor	120
5.6.1	General	120
5.6.2	Requirements for protective conductors	120
5.6.3	Requirements for protective earthing conductors	121
5.6.4	Requirements for protective bonding conductors	122
5.6.5	Terminals for protective conductors	124
5.6.6	Resistance of the protective bonding system	125
5.6.7	Reliable connection of a protective earthing conductor	126
5.6.8	Functional earthing	127
5.7	Prospective touch voltage, touch current and protective conductor current.....	127
5.7.1	General	127
5.7.2	Measuring devices and networks	127
5.7.3	Equipment set-up, supply connections and earth connections.....	127
5.7.4	Unearthed accessible parts	128
5.7.5	Earthed accessible conductive parts	128
5.7.6	Requirements when touch current exceeds ES2 limits	128
5.7.7	Prospective touch voltage and touch current associated with external circuits.....	129
5.7.8	Summation of touch currents from external circuits	130
5.8	Backfeed safeguard in battery backed up supplies	131
6	Electrically-caused fire	132
6.1	General.....	132
6.2	Classification of power sources (PS) and potential ignition sources (PIS)	132
6.2.1	General	132
6.2.2	Power source circuit classifications	132
6.2.3	Classification of potential ignition sources	135
6.3	Safeguards against fire under normal operating conditions and abnormal operating conditions.....	136
6.3.1	Requirements	136
6.3.2	Compliance criteria.....	136
6.4	Safeguards against fire under single fault conditions.....	137
6.4.1	General	137
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	137
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 circuits and PS3 circuits	137
6.4.4	Control of fire spread in PS1 circuits.....	138
6.4.5	Control of fire spread in PS2 circuits.....	138
6.4.6	Control of fire spread in a PS3 circuit	139
6.4.7	Separation of combustible materials from a PIS	140
6.4.8	Fire enclosures and fire barriers	142
6.4.9	Flammability of an insulating liquid	147
6.5	Internal and external wiring.....	147
6.5.1	General requirements	147
6.5.2	Requirements for interconnection to building wiring.	148
6.5.3	Internal wiring for socket-outlets	148

6.6	Safeguards against fire due to the connection of additional equipment.....	148
7	Injury caused by hazardous substances.....	148
7.1	General.....	148
7.2	Reduction of exposure to hazardous substances.....	148
7.3	Ozone exposure.....	149
7.4	Use of personal safeguards or personal protective equipment (PPE)	149
7.5	Use of instructional safeguards and instructions	149
7.6	Batteries and their protection circuits	149
8	Mechanically-caused injury.....	149
8.1	General.....	149
8.2	Mechanical energy source classifications.....	149
8.2.1	General classification	149
8.2.2	MS1.....	151
8.2.3	MS2.....	152
8.2.4	MS3.....	152
8.3	Safeguards against mechanical energy sources.....	152
8.4	Safeguards against parts with sharp edges and corners	152
8.4.1	Requirements	152
8.4.2	Compliance criteria.....	152
8.5	Safeguards against moving parts	153
8.5.1	Requirements	153
8.5.2	Instructional safeguard requirements	153
8.5.3	Compliance criteria.....	154
8.5.4	Special categories of equipment containing moving parts	154
8.5.5	High pressure lamps.....	159
8.6	Stability of equipment	159
8.6.1	Requirements	159
8.6.2	Static stability	161
8.6.3	Relocation stability	162
8.6.4	Glass slide test.....	162
8.6.5	Horizontal force test and compliance criteria.....	163
8.7	Equipment mounted to a wall, ceiling or other structure	163
8.7.1	Requirements	163
8.7.2	Test methods.....	163
8.7.3	Compliance criteria.....	164
8.8	Handle strength	164
8.8.1	General	164
8.8.2	Test method	165
8.9	Wheels or casters attachment requirements	165
8.9.1	General	165
8.9.2	Test method	165
8.10	Carts, stands, and similar carriers.....	165
8.10.1	General	165
8.10.2	Marking and instructions.....	166
8.10.3	Cart, stand or carrier loading test and compliance criteria.....	166
8.10.4	Cart, stand or carrier impact test.....	167
8.10.5	Mechanical stability	167
8.10.6	Thermoplastic temperature stability	167

8.11	Mounting means for slide-rail mounted equipment (SRME)	167
8.11.1	General	167
8.11.2	Requirements	168
8.11.3	Mechanical strength test	168
8.11.4	Compliance criteria	169
8.12	Telescoping or rod antennas	169
9	Thermal burn injury	169
9.1	General	169
9.2	Thermal energy source classifications	169
9.2.1	TS1	169
9.2.2	TS2	169
9.2.3	TS3	170
9.3	Touch temperature limits	170
9.3.1	Requirements	170
9.3.2	Test method and compliance criteria	170
9.4	Safeguards against thermal energy sources	171
9.5	Requirements for safeguards	172
9.5.1	Equipment safeguard	172
9.5.2	Instructional safeguard	172
9.6	Requirements for wireless power transmitters	172
9.6.1	General	172
9.6.2	Specification of the foreign objects	172
9.6.3	Test method and compliance criteria	175
10	Radiation	176
10.1	General	176
10.2	Radiation energy source classifications	176
10.2.1	General classification	176
10.2.2	RS1	177
10.2.3	RS2	177
10.2.4	RS3	177
10.3	Safeguards against laser radiation	178
10.4	Safeguards against optical radiation from lamps and lamp systems (including LED types)	178
10.4.1	General requirements	178
10.4.2	Requirements for enclosures	179
10.4.3	Instructional safeguard	179
10.4.4	Compliance criteria	181
10.5	Safeguards against X-radiation	181
10.5.1	Requirements	181
10.5.2	Compliance criteria	181
10.5.3	Test method	182
10.6	Safeguards against acoustic energy sources	182
10.6.1	General	182
10.6.2	Classification of devices without the capacity to estimate sound dose	183
10.6.3	Classification of devices (new)	184
10.6.4	Requirements for maximum sound exposure	185
10.6.5	Requirements for dose-based systems	185
10.6.6	Requirements for listening devices (headphones, earphones, etc.)	186
Annex A (informative)	Examples of equipment within the scope of this document	187

Annex B (normative) Normal operating condition tests, abnormal operating condition tests and single fault condition tests	188
B.1 General.....	188
B.1.1 Test applicability.....	188
B.1.2 Type of test	188
B.1.3 Test samples	188
B.1.4 Compliance by inspection of relevant data	188
B.1.5 Temperature measurement conditions	188
B.2 Normal operating conditions.....	189
B.2.1 General	189
B.2.2 Supply frequency.....	189
B.2.3 Supply voltage.....	189
B.2.4 Normal operating voltages	189
B.2.5 Input test	189
B.2.6 Operating temperature measurement conditions	190
B.2.7 Battery charging and discharging under normal operating conditions	191
B.3 Simulated abnormal operating conditions	191
B.3.1 General	191
B.3.2 Covering of ventilation openings	192
B.3.3 DC mains polarity test	192
B.3.4 Setting of voltage selector	192
B.3.5 Maximum load at output terminals	192
B.3.6 Reverse battery polarity.....	192
B.3.7 Audio amplifier abnormal operating conditions	192
B.3.8 Compliance criteria during and after abnormal operating conditions.....	193
B.4 Simulated single fault conditions	193
B.4.1 General	193
B.4.2 Temperature controlling device	193
B.4.3 Motor tests	193
B.4.4 Functional insulation.....	193
B.4.5 Short-circuit and interruption of electrodes in tubes and semiconductors	194
B.4.6 Short-circuit or disconnection of passive components	194
B.4.7 Continuous operation of components	194
B.4.8 Compliance criteria during and after single fault conditions.....	195
B.4.9 Battery charging and discharging under single fault conditions	195
Annex C (normative) UV radiation.....	196
C.1 Protection of materials in equipment from UV radiation	196
C.1.1 General	196
C.1.2 Requirements	196
C.1.3 Test method and compliance criteria	196
C.2 UV light conditioning test	197
C.2.1 Test apparatus	197
C.2.2 Mounting of test samples	197
C.2.3 Carbon-arc light-exposure test.....	197
C.2.4 Xenon-arc light-exposure test.....	197
Annex D (normative) Test generators.....	198
D.1 Impulse test generators	198
D.2 Antenna interface test generator	198

D.3	Electronic pulse generator	199
Annex E (normative)	Test conditions for equipment containing audio amplifiers	200
E.1	Electrical energy source classification for audio signals	200
E.2	Audio amplifier normal operating conditions	200
E.3	Audio amplifier abnormal operating conditions	201
Annex F (normative)	Equipment markings, instructions, and instructional safeguards	202
F.1	General.....	202
F.2	Letter symbols and graphical symbols	202
F.2.1	Letter symbols	202
F.2.2	Graphical symbols	202
F.2.3	Compliance criteria	202
F.3	Equipment markings	202
F.3.1	Equipment marking locations	202
F.3.2	Equipment identification markings	203
F.3.3	Equipment rating markings	203
F.3.4	Voltage setting device	205
F.3.5	Markings on terminals and operating devices.....	205
F.3.6	Equipment markings related to equipment classification	206
F.3.7	Equipment IP rating marking.....	207
F.3.8	External power supply output marking	207
F.3.9	Durability, legibility and permanence of markings	207
F.3.10	Test for the permanence of markings	207
F.4	Instructions	207
F.5	Instructional safeguards	208
Annex G (normative)	Components	211
G.1	Switches	211
G.1.1	General	211
G.1.2	Requirements	211
G.1.3	Test method and compliance criteria	212
G.2	Relays	212
G.2.1	Requirements	212
G.2.2	Overload test.....	213
G.2.3	Relay controlling connectors supplying power to other equipment.....	213
G.2.4	Test method and compliance criteria	213
G.3	Protective devices.....	213
G.3.1	Thermal cut-offs	213
G.3.2	Thermal links.....	214
G.3.3	PTC thermistors.....	215
G.3.4	Overcurrent protective devices	215
G.3.5	Safeguard components not mentioned in G.3.1 to G.3.4	215
G.4	Connectors	216
G.4.1	Clearance and creepage distance requirements	216
G.4.2	Mains connectors	216
G.4.3	Connectors other than mains connectors	216
G.5	Wound components	216
G.5.1	Wire insulation in wound components	216
G.5.2	Endurance test	217
G.5.3	Transformers	219

G.5.4	Motors	226
G.6	Wire insulation	230
G.6.1	General	230
G.6.2	Enamelled winding wire insulation	230
G.7	Mains supply cords	231
G.7.1	General	231
G.7.2	Cross sectional area	232
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords	233
G.7.4	Cord entry	234
G.7.5	Non-detachable cord bend protection	234
G.7.6	Supply wiring space	235
G.8	Varistors	236
G.8.1	General	236
G.8.2	Safeguards against fire	237
G.9	Integrated circuit (IC) current limiters	238
G.9.1	Requirements	238
G.9.2	Test program	238
G.9.3	Compliance criteria	239
G.10	Resistors	240
G.10.1	General	240
G.10.2	Conditioning	240
G.10.3	Resistor test	240
G.10.4	Voltage surge test	240
G.10.5	Impulse test	240
G.10.6	Overload test	240
G.11	Capacitors and RC units	240
G.11.1	General	240
G.11.2	Conditioning of capacitors and RC units	241
G.11.3	Rules for selecting capacitors	241
G.12	Optocouplers	241
G.13	Printed boards	242
G.13.1	General	242
G.13.2	Uncoated printed boards	242
G.13.3	Coated printed boards	242
G.13.4	Insulation between conductors on the same inner surface	243
G.13.5	Insulation between conductors on different surfaces	243
G.13.6	Tests on coated printed boards	244
G.14	Coatings on component terminals	246
G.14.1	Requirements	246
G.14.2	Test method and compliance criteria	246
G.15	Pressurized liquid filled components	246
G.15.1	Requirements	246
G.15.2	Test methods and compliance criteria	247
G.15.3	Compliance criteria	248
G.16	IC that includes a capacitor discharge function (ICX)	248
G.16.1	Requirements	248
G.16.2	Tests	248
G.16.3	Compliance criteria	249

Annex H (normative) Criteria for telephone ringing signals	250
H.1 General.....	250
H.2 Method A	250
H.3 Method B	252
H.3.1 Ringing signal.....	252
H.3.2 Tripping device and monitoring voltage	253
Annex I (informative) Overvoltage categories (see IEC 60364-4-44)	255
Annex J (normative) Insulated winding wires for use without interleaved insulation	256
J.1 General.....	256
J.2 Type tests	256
J.2.1 General	256
J.2.2 Electric strength	256
J.2.3 Flexibility and adherence	257
J.2.4 Heat shock	257
J.2.5 Retention of electric strength after bending.....	258
J.3 Testing during manufacturing	258
J.3.1 General	258
J.3.2 Spark test	258
J.3.3 Sampling test.....	258
Annex K (normative) Safety interlocks	259
K.1 General.....	259
K.1.1 General requirements	259
K.1.2 Test method and compliance criteria	259
K.2 Components of the safety interlock safeguard mechanism	259
K.3 Inadvertent change of operating mode	259
K.4 Interlock safeguard override.....	260
K.5 Fail-safe	260
K.5.1 Requirement.....	260
K.5.2 Test method and compliance criteria	260
K.6 Mechanically operated safety interlocks	260
K.6.1 Endurance requirement	260
K.6.2 Test method and compliance criteria	260
K.7 Interlock circuit isolation	261
K.7.1 Separation distances for contact gaps and interlock circuit elements	261
K.7.2 Overload test.....	261
K.7.3 Endurance test	261
K.7.4 Electric strength test.....	262
Annex L (normative) Disconnect devices.....	263
L.1 General requirements	263
L.2 Permanently connected equipment	263
L.3 Parts that remain energized	263
L.4 Single-phase equipment.....	263
L.5 Three-phase equipment	264
L.6 Switches as disconnect devices	264
L.7 Plugs as disconnect devices	264
L.8 Multiple power sources	264
L.9 Compliance criteria	264
Annex M (normative) Equipment containing batteries and their protection circuits	265

M.1	General requirements	265
M.2	Safety of batteries and their cells	265
M.2.1	Requirements	265
M.2.2	Compliance criteria	265
M.3	Protection circuits for batteries provided within the equipment	265
M.3.1	Requirements	265
M.3.2	Test method	266
M.3.3	Compliance criteria	266
M.4	Additional safeguards for equipment containing a portable secondary lithium battery	267
M.4.1	General	267
M.4.2	Charging safeguards	267
M.4.3	Fire enclosure	268
M.4.4	Drop test of equipment containing a secondary lithium battery	268
M.5	Risk of burn due to short-circuit during carrying	269
M.5.1	Requirements	269
M.5.2	Test method and compliance criteria	269
M.6	Safeguards against short-circuits	269
M.6.1	Requirements	269
M.6.2	Compliance criteria	270
M.7	Risk of explosion from lead acid and NiCd batteries	270
M.7.1	Ventilation preventing an explosive gas concentration	270
M.7.2	Test method and compliance criteria	271
M.7.3	Ventilation tests	273
M.7.4	Marking requirement	274
M.8	Protection against internal ignition from external spark sources of batteries with aqueous electrolyte	274
M.8.1	General	274
M.8.2	Test method	274
M.9	Preventing electrolyte spillage	277
M.9.1	Protection from electrolyte spillage	277
M.9.2	Tray for preventing electrolyte spillage	277
M.10	Instructions to prevent reasonably foreseeable misuse	277
Annex N (normative)	Electrochemical potentials (V)	279
Annex O (normative)	Measurement of creepage distances and clearances	280
Annex P (normative)	Safeguards against conductive objects	287
P.1	General	287
P.2	Safeguards against entry or consequences of entry of a foreign object	287
P.2.1	General	287
P.2.2	Safeguards against entry of a foreign object	287
P.2.3	Safeguards against the consequences of entry of a foreign object	288
P.3	Safeguards against spillage of internal liquids	290
P.3.1	General	290
P.3.2	Determination of spillage consequences	290
P.3.3	Spillage safeguards	290
P.3.4	Compliance criteria	291
P.4	Metallized coatings and adhesives securing parts	291
P.4.1	General	291
P.4.2	Tests	291

Annex Q (normative) Circuits intended for interconnection with building wiring	293
Q.1 Limited power source	293
Q.1.1 Requirements	293
Q.1.2 Test method and compliance criteria	293
Q.2 Test for external circuits – paired conductor cable	294
Annex R (normative) Limited short-circuit test	295
R.1 General	295
R.2 Test setup	295
R.3 Test method	295
R.4 Compliance criteria	296
Annex S (normative) Tests for resistance to heat and fire	297
S.1 Flammability test for fire enclosure and fire barrier materials of equipment where the steady state power does not exceed 4 000 W	297
S.2 Flammability test for fire enclosure and fire barrier integrity	298
S.3 Flammability tests for the bottom of a fire enclosure	299
S.3.1 Mounting of samples	299
S.3.2 Test method and compliance criteria	299
S.4 Flammability classification of materials	300
S.5 Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W	300
Annex T (normative) Mechanical strength tests	302
T.1 General	302
T.2 Steady force test, 10 N	302
T.3 Steady force test, 30 N	302
T.4 Steady force test, 100 N	302
T.5 Steady force test, 250 N	302
T.6 Enclosure impact test	302
T.7 Drop test	303
T.8 Stress relief test	303
T.9 Glass impact test	304
T.10 Glass fragmentation test	304
T.11 Test for telescoping or rod antennas	304
Annex U (normative) Mechanical strength of CRTs and protection against the effects of implosion	306
U.1 General	306
U.2 Test method and compliance criteria for non-intrinsically protected CRTs	306
U.3 Protective screen	307
Annex V (normative) Determination of accessible parts	308
V.1 Accessible parts of equipment	308
V.1.1 General	308
V.1.2 Test method 1 – Surfaces and openings tested with jointed test probes	308
V.1.3 Test method 2 – Openings tested with straight unjointed test probes	308
V.1.4 Test method 3 – Plugs, jacks, connectors	311
V.1.5 Test method 4 – Slot openings	311
V.1.6 Test method 5 – Terminals intended to be used by an ordinary person	312
V.2 Accessible part criterion	312
Annex W (informative) Comparison of terms introduced in this document	313
W.1 General	313

W.2	Comparison of terms.....	313
Annex X (normative)	Alternative method for determining clearances for insulation in circuits connected to an AC mains not exceeding 420 V peak (300 V RMS).....	327
Annex Y (normative)	Construction requirements for outdoor enclosures.....	329
Y.1	General.....	329
Y.2	Resistance to UV radiation.....	329
Y.3	Resistance to corrosion	329
Y.3.1	General	329
Y.3.2	Test apparatus	329
Y.3.3	Water – saturated sulphur dioxide atmosphere	330
Y.3.4	Test procedure	330
Y.3.5	Compliance criteria.....	330
Y.4	Gaskets	331
Y.4.1	General	331
Y.4.2	Gasket tests	331
Y.4.3	Tensile strength and elongation tests.....	331
Y.4.4	Compression test.....	331
Y.4.5	Oil resistance	332
Y.4.6	Securing means.....	333
Y.5	Protection of equipment within an outdoor enclosure	333
Y.5.1	General	333
Y.5.2	Protection from moisture.....	333
Y.5.3	Water spray test	334
Y.5.4	Protection from plants and vermin	336
Y.5.5	Protection from excessive dust	337
Y.6	Mechanical strength of enclosures	337
Y.6.1	General	337
Y.6.2	Impact test.....	338
Annex ZA (normative)	Normative references to international publications with their corresponding European publications	339
Annex ZB (normative)	Special National Conditions	347
Annex ZC (informative)	A-deviations	353
Annex ZD (informative)	IEC and CENELEC code designations for flexible cords.....	354
Bibliography.....		355
Figure 1	– Three block model for pain and injury.....	23
Figure 2	– Three block model for safety	24
Figure 3	– Schematic and model for electrically-caused pain or injury.....	28
Figure 4	– Model for protection against electrically-caused pain or injury	28
Figure 5	– Model for electrically-caused fire.....	29
Figure 6	– Models for protection against fire	30
Figure 7	– Schematic and model for thermally-caused injury.....	32
Figure 8	– Model for protection against thermally-caused injury	32
Figure 9	– Model for protection of an ordinary person against a class 1 energy source	63
Figure 10	– Model for protection of an ordinary person against a class 2 energy source	63

Figure 11 – Model for protection of an ordinary person against a class 2 energy source during ordinary person servicing conditions	64
Figure 12 – Model for protection of an ordinary person against a class 3 energy source	64
Figure 13 – Model for protection of an instructed person against a class 1 energy source	64
Figure 14 – Model for protection of an instructed person against a class 2 energy source	65
Figure 15 – Model for protection of an instructed person against a class 3 energy source	65
Figure 16 – Model for protection of a skilled person against a class 1 energy source	65
Figure 17 – Model for protection of a skilled person against a class 2 energy source	65
Figure 18 – Model for protection of a skilled person against a class 3 energy source	66
Figure 19 – Model for protection of a skilled person against class 3 energy sources during equipment servicing conditions	66
Figure 20 – Test hook	72
Figure 21 – Illustration showing ES limits for voltage and current	74
Figure 22 – Maximum values for combined AC current and DC current	76
Figure 23 – Maximum values for combined AC voltage and DC voltage	76
Figure 24 – Contact requirements to bare internal conductive parts	80
Figure 25 – Mandrel	103
Figure 26 – Initial position of mandrel	103
Figure 27 – Final position of mandrel	103
Figure 28 – Position of metal foil on insulating material	104
Figure 29 – Example of electric strength test instrument for solid insulation	112
Figure 30 – Application points of test voltage	113
Figure 31 – Test for separation between an external circuit and earth	116
Figure 32 – Test circuit for touch current of single-phase equipment	129
Figure 33 – Test circuit for touch current of three-phase equipment	130
Figure 34 – Power measurement for worst-case fault	133
Figure 35 – Power measurement for worst-case power source fault	134
Figure 36 – Illustration of power source classification	135
Figure 37 – Minimum separation requirements from a PIS	140
Figure 38 – Extended separation requirements from a PIS	141
Figure 39 – Deflected separation requirements from a PIS when a fire barrier is used	142
Figure 40 – Determination of top, bottom and side openings	143
Figure 41 – Top openings	144
Figure 42 – Bottom openings	145
Figure 43 – Baffle plate construction	145
Figure 44 – PIS trajectory downwards	146
Figure 45 – Limits for moving fan blades made of non-plastic materials	151
Figure 46 – Limits for moving fan blades made of plastic materials	151
Figure 47 – Steel disc	173
Figure 48 – Aluminium ring	174
Figure 49 – Aluminium foil	175

Figure 50 – Example of a warning label for a lamp with multiple hazard spectral regions	181
Figure D.1 – 1,2/50 μ s and 10/700 μ s voltage impulse generator	198
Figure D.2 – Antenna interface test generator circuit	199
Figure D.3 – Example of an electronic pulse generator	199
Figure E.1 – Band-pass filter for wide-band noise measurement	201
Figure F.1 – Example of an instructional safeguard	209
Figure G.1 – Determination of arithmetic average temperature	221
Figure G.2 – Test voltages	226
Figure G.3 – Thermal ageing time	245
Figure G.4 – Abrasion resistance test for coating layers	246
Figure H.1 – Definition of ringing period and cadence cycle	251
Figure H.2 – I_{TS1} limit curve for cadenced ringing signal	252
Figure H.3 – Peak and peak-to-peak currents	252
Figure H.4 – Ringing voltage trip criteria	254
Figure M.1 – Distance d as a function of the rated capacity for various charge currents I (mA/Ah)	277
Figure O.1 – Narrow groove	280
Figure O.2 – Wide groove	281
Figure O.3 – V-shaped groove	281
Figure O.4 – Intervening unconnected conductive part	281
Figure O.5 – Rib	281
Figure O.6 – Uncemented joint with narrow groove	282
Figure O.7 – Uncemented joint with wide groove	282
Figure O.8 – Uncemented joint with narrow and wide grooves	282
Figure O.9 – Narrow recess	283
Figure O.10 – Wide recess	283
Figure O.11 – Coating around terminals	284
Figure O.12 – Coating over printed wiring	284
Figure O.13 – Example of measurements in an enclosure of insulating material	285
Figure O.14 – Cemented joints in multi-layer printed boards	285
Figure O.15 – Device filled with insulating compound	286
Figure O.16 – Partitioned bobbin	286
Figure P.1 – Examples of cross-sections of designs of top openings which prevent vertical entry	288
Figure P.2 – Examples of cross-sections of designs of side opening louvres which prevent vertical entry	288
Figure P.3 – Internal volume locus for foreign object entry	289
Figure S.1 – Top openings / surface of fire enclosure or fire barrier	299
Figure T.1 – Impact test using sphere	303
Figure V.1 – Jointed test probe for equipment likely to be accessible to children	309
Figure V.2 – Jointed test probe for equipment not likely to be accessible to children	310
Figure V.3 – Blunt probe	311
Figure V.4 – Wedge probe	311

Figure V.5 – Terminal probe	312
Figure Y.1 – Gasket test	332
Figure Y.2 – Water-spray test spray-head piping.....	335
Figure Y.3 – Water-spray test spray head	336
Table 1 – Response to energy class	23
Table 2 – Examples of body response or property damage related to energy sources	24
Table 3 – Examples of safeguard characteristics	27
Table 4 – Electrical energy source limits for steady state ES1 and ES2	75
Table 5 – Electrical energy source limits for a charged capacitor	77
Table 6 – Voltage limits for single pulses	78
Table 7 – Current limits for single pulses	78
Table 8 – Minimum air gap distance.....	80
Table 9 – Temperature limits for materials, components and systems	82
Table 10 – Minimum clearances for voltages with frequencies up to 30 kHz.....	87
Table 11 – Minimum clearances for voltages with frequencies above 30 kHz	88
Table 12 – Mains transient voltages.....	89
Table 13 – External circuit transient voltages.....	90
Table 14 – Minimum clearances using required withstand voltage.....	93
Table 15 – Electric strength test voltages.....	94
Table 16 – Multiplication factors for clearances and test voltages	94
Table 17 – Minimum creepage distances for basic insulation and supplementary insulation in mm.....	98
Table 18 – Minimum values of creepage distances (in mm) for frequencies higher than 30 kHz and up to 400 kHz.....	99
Table 19 – Tests for insulation in non-separable layers.....	102
Table 20 – Electric field strength E_P for some commonly used materials	106
Table 21 – Reduction factors for the value of breakdown electric field strength E_P at higher frequencies	107
Table 22 – Reduction factors for the value of breakdown electric field strength E_P at higher frequencies for thin materials	107
Table 23 – Values for insulation resistance	108
Table 24 – Distance through insulation of internal wiring.....	109
Table 25 – Test voltages for electric strength tests based on transient voltages.....	111
Table 26 – Test voltages for electric strength tests based on the peak of the working voltages and recurring peak voltages	111
Table 27 – Test voltages for electric strength tests based on temporary overvoltages.....	111
Table 28 – Test values for electric strength tests	114
Table 29 – Overview of tests for resistor applications	119
Table 30 – Protective earthing conductor sizes for reinforced safeguards for permanently connected equipment.....	121
Table 31 – Minimum protective bonding conductor size of copper conductors	123
Table 32 – Sizes of terminals for protective conductors	125
Table 33 – Test duration, mains connected equipment.....	126

Table 34 – List of applicable IEC standards regarding insulating liquids	147
Table 35 – Classification for various categories of mechanical energy sources	150
Table 36 – Overview of requirements and tests	160
Table 37 – Torque to be applied to screws	164
Table 38 – Touch temperature limits for accessible parts	171
Table 39 – Radiation energy source classifications	176
Table 40 – Allowable radiation level according to IEC 62471 (all parts) for each hazard type	178
Table 41 – Hazard-related risk group marking of equipment	180
Table 42 – Explanation of marking information and guidance on control measures	180
Table C.1 – Minimum property retention limits after UV exposure	196
Table D.1 – Component values for Figure D.1 and Figure D.2	199
Table E.1 – Audio signal electrical energy source classes and safeguards	200
Table F.1 – Instructional safeguard element description and examples	209
Table F.2 – Examples of markings, instructions, and instructional safeguards	210
Table G.1 – Peak surge current	212
Table G.2 – Test temperature and testing time (days) per cycle	218
Table G.3 – Temperature limits for transformer windings and for motor windings (except for the motor running overload test)	221
Table G.4 – Test voltages for electric strength tests based on the peak of the working voltages	222
Table G.5 – Values of FIW wires with maximum overall diameter and minimum test voltages according to the enamel increase	225
Table G.6 – Temperature limits for running overload tests	227
Table G.7 – Sizes of conductors	232
Table G.8 – Strain relief test force	233
Table G.9 – Range of conductor sizes to be accepted by terminals	235
Table G.10 – Varistor overload and temporary overvoltage test	237
Table G.11 – Performance test program for integrated circuit (IC) current limiters	239
Table G.12 – Capacitor ratings according to IEC 60384-14	241
Table G.13 – Minimum separation distances for coated printed boards	243
Table G.14 – Insulation in printed boards	244
Table I.1 – Overvoltage categories	255
Table J.1 – Mandrel diameter	257
Table J.2 – Oven temperature	257
Table M.1 – Values for current I_{float} and I_{boost} , factors f_g and f_S , and voltages U_{float} and U_{boost}	272
Table O.1 – Value of X	280
Table Q.1 – Limits for inherently limited power sources	293
Table Q.2 – Limits for power sources not inherently limited (overcurrent protective device required)	294
Table S.1 – Foamed materials	300
Table S.2 – Rigid materials	300
Table S.3 – Very thin materials	300

Table T.1 – Impact force	304
Table T.2 – Torque values for end-piece test	305
Table W.1 – Comparison of terms and definitions in IEC 60664-1:2007 and IEC 62368-1	313
Table W.2 – Comparison of terms and definitions in IEC 61140:2016 and IEC 62368-1	315
Table W.3 – Comparison of terms and definitions in IEC 60950-1:2005 and IEC 62368-1	318
Table W.4 – Comparison of terms and definitions in IEC 60728-11:2016 and IEC 62368-1	322
Table W.5 – Comparison of terms and definitions in IEC 62151:2000 and IEC 62368-1	323
Table W.6 – Comparison of terms and definitions in IEC 60065:2014 and IEC 62368-1	324
Table X.1 – Alternative minimum clearances for insulation in circuits connected to ac mains not exceeding 420 V peak (300 V RMS).....	327
Table X.2 – Additional clearances for insulation in circuits connected to ac mains not exceeding 420 V peak (300 V RMS).....	328
Table Y.1 – Examples of the provision of pollution degree environments	333

This is a preview generated by EVS

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**AUDIO/VIDEO, INFORMATION AND
COMMUNICATION TECHNOLOGY EQUIPMENT –****Part 1: Safety requirements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62368-1 has been prepared by TC 108: Safety of electronic equipment within the field of audio/video, information technology and communication technology.

This third edition cancels and replaces the second edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- addition of requirements for outdoor equipment;
- new requirements for optical radiation;
- addition of requirements for insulating liquids;
- addition of requirements for work cells;
- addition of requirements for wireless power transmitters;
- addition of requirements for fully insulated winding wire (FIW);

- alternative method for determination of top, bottom and side openings for fire enclosures;
- alternative requirements for sound pressure.

The text of this document is based on the following documents:

FDIS	Report on voting
108/701/FDIS	108/707/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62368 series, published under the general title *Audio/video, information and communication technology equipment*, can be found on the IEC website.

The “in some countries” notes regarding differing national practices are contained in the following clauses, subclauses and tables:

0.2.1, Clause 1, 3.3.8.1, 3.3.8.3, 4.1.15, 4.7.3, 5.2.2.2, 5.4.2.3.2.4, 5.4.2.5, 5.4.5.1, 5.4.10.2.1, 5.4.10.2.2, 5.4.10.2.3, 5.5.2.1, 5.5.6, 5.6.4.2.1, 5.6.8, 5.7.6, 5.7.7.1, 8.5.4.2.3, 10.5.3, 10.6.1, F.3.3.6, Y.4.1, Y.4.5, Table 12, Table 13 and Table 39.

In this document, the following print types or formats are used:

- requirements proper and normative annexes: in roman type;
- compliance statements and test specifications: *in italic type*;
- notes/explanatory matter: in smaller roman type;
- normative conditions within tables: in smaller roman type;
- terms that are defined in 3.3: **bold**.

In figures and tables, if colour is available:

- green colour denotes a class 1 energy source;
- yellow colour denotes a class 2 energy source;
- red colour denotes a class 3 energy source.

A comparison of terms introduced in this document that are different from other existing IEC documents is given in Annex W.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

NOTE Explanatory information related to IEC 62368-1 is contained in IEC TR 62368-2. It provides rationale together with explanatory information related to this document.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

0 Principles of this product safety standard

0.1 Objective

This part of IEC 62368 is a product safety standard that classifies energy sources, prescribes **safeguards** against those energy sources, and provides guidance on the application of, and requirements for, those **safeguards**.

The prescribed **safeguards** are intended to reduce the likelihood of pain, injury and, in the case of fire, property damage.

The objective of the INTRODUCTION is to help designers to understand the underlying principles of safety in order to design safe equipment. These principles are informative and not an alternative to the detailed requirements of this document.

0.2 Persons

0.2.1 General

This document describes **safeguards** for the protection of three kinds of persons: the **ordinary person**, the **instructed person**, and the **skilled person**. Unless otherwise specified, the requirements for an **ordinary person** apply. This document assumes that a person will not intentionally create conditions or situations that could cause pain or injury.

deleted text

0.2.2 Ordinary person

Ordinary person is the term applied to all persons other than **instructed persons** and **skilled persons**. **Ordinary persons** include not only users of the equipment, but also all persons who may have access to the equipment or who may be in the vicinity of the equipment. Under **normal operating conditions** or **abnormal operating conditions**, **ordinary persons** should not be exposed to parts comprising energy sources capable of causing pain or injury. Under a **single fault condition**, **ordinary persons** should not be exposed to parts comprising energy sources capable of causing injury.

0.2.3 Instructed person

Instructed person is a term applied to persons who have been instructed and trained by a **skilled person**, or who are supervised by a **skilled person**, to identify energy sources that may cause pain (see Table 1) and to take precautions to avoid unintentional contact with or exposure to those energy sources. Under **normal operating conditions**, **abnormal operating conditions** or **single fault conditions**, **instructed persons** should not be exposed to parts comprising energy sources capable of causing injury.

0.2.4 Skilled person

Skilled person is a term applied to persons who have training or experience in the equipment technology, particularly in knowing the various energies and energy magnitudes used in the equipment. **Skilled persons** are expected to use their training and experience to recognize energy sources capable of causing pain or injury and to take action for protection from injury from those energies. **Skilled persons** should also be protected against unintentional contact or exposure to energy sources capable of causing injury.

0.3 Model for pain and injury

An energy source that causes pain or injury does so through the transfer of some form of energy to or from a body part.

This concept is represented by a three-block model (see Figure 1).

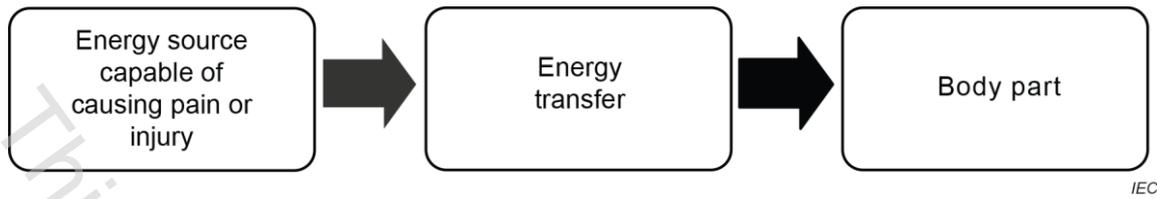


Figure 1 – Three block model for pain and injury

This safety standard specifies three classes of energy sources defined by magnitudes and durations of source parameters relative to the body responses to those electrical and thermal energy sources (see Table 1). Source parameters relative to responses to **combustible material**, mechanical energy sources and radiation energy sources are specified based on experience and basic safety standards.

Table 1 – Response to energy class

Energy source	Effect on the body	Effect on combustible materials
Class 1	Not painful, but may be detectable	Ignition not likely
Class 2	Painful, but not an injury	Ignition possible, but limited growth and spread of fire
Class 3	Injury	Ignition likely, rapid growth and spread of fire

The energy threshold for pain or injury is not constant throughout the population. For example, for some energy sources, the threshold is a function of body mass; the lower the mass, the lower the threshold, and vice-versa. Other body variables include age, state of health, state of emotions, effect of drugs, skin characteristics, etc. Furthermore, even where outward appearances otherwise appear equal, individuals differ in their thresholds of susceptibility to the same energy source.

The effect of duration of energy transfer is a function of the specific energy form. For example, pain or injury from thermal energy can be very short (1 s) for high skin temperature, or very long (several hours) for low skin temperature.

Furthermore, the pain or injury may occur some considerable time after the transfer of energy to a body part. For example, pain or injury from some chemical or physiological reaction may not be manifested for days, weeks, months, or years.

0.4 Energy sources

Energy sources are addressed by this document, together with the pain or injury that results from a transfer of that energy to the body, and the likelihood of property damage that results from fire escaping the equipment.

An electrical product is connected to an electrical energy source (for example, the **mains**), an external power supply, or a **battery**. An electrical product uses the electrical energy to perform its intended functions.

In the process of using electrical energy, the product transforms the electrical energy into other forms of energy (for example, thermal energy, kinetic energy, optical energy, audio energy, electromagnetic energy, etc.). Some energy transformations may be a deliberate part of the product function (for example, moving parts of a printer, images on a visual display unit, sound from a speaker, etc.). Some energy transformations may be a by-product of the product function (for example, heat dissipated by functional circuits, X-radiation from a cathode-ray tube, etc.).

Some products may use energy sources that are non-electrical energy sources such as moving parts or chemicals. The energy in these other sources may be transferred to or from a body part, or may be transformed into other energy forms (for example, chemical energy may be converted to electrical energy through a **battery**, or a moving body part transfers its kinetic energy to a sharp edge).

Examples of the types of energy forms and the associated injuries and property damage addressed in this document are in Table 2.

Table 2 – Examples of body response or property damage related to energy sources

Forms of energy	Examples of body response or property damage	Clause
Electrical energy (for example, energized conductive parts)	Pain, fibrillation, cardiac arrest, respiratory arrest, skin burn, or internal organ burn	5
Thermal energy (for example, electrical ignition and spread of fire)	Electrically-caused fire leading to burn-related pain or injury, or property damage	6
Chemical reaction (for example, electrolyte, poison)	Skin damage, organ damage, or poisoning	7
Kinetic energy (for example, moving parts of equipment, or a moving body part against an equipment part)	Laceration, puncture, abrasion, contusion, crush, amputation, or loss of a limb, eye, ear, etc.	8
Thermal energy (for example, hot accessible parts)	Skin burn	9
Radiated energy (for example, electromagnetic energy, optical energy, acoustic energy)	Loss of sight, skin burn, or loss of hearing	10

0.5 Safeguards

0.5.1 General

Many products necessarily use energy capable of causing pain or injury. Product design cannot eliminate such energy use. Consequently, such products should use a scheme that reduces the likelihood of such energy being transferred to a body part. The scheme that reduces the likelihood of energy transfer to a body part is a **safeguard** (see Figure 2).



Figure 2 – Three block model for safety

A **safeguard** is a device or scheme or system that:

- is interposed between an energy source capable of causing pain or injury and a body part, and
- reduces the likelihood of transfer of energy capable of causing pain or injury to a body part.

NOTE **Safeguard** mechanisms against transfer of energy capable of causing pain or injury include:

- attenuating the energy (reduces the value of the energy); or
- impeding the energy (slows the rate of energy transfer); or
- diverting the energy (changes the energy direction); or
- disconnecting, interrupting, or disabling the energy source; or
- enveloping the energy source (reduces the likelihood of the energy from escaping); or
- interposing a barrier between a body part and the energy source.

A **safeguard** can be applied to the equipment, to the local installation, to a person or can be a learned or directed behaviour (for example, resulting from an **instructional safeguard**) intended to reduce the likelihood of transfer of energy capable of causing pain or injury. A **safeguard** may be a single element or may be a set of elements.

Generally, this document uses an order of preference for providing **safeguards** based on the requirements given in ISO/IEC Guide 51 as follows:

- **equipment safeguards** are always useful, since they do not require any knowledge or actions by persons coming into contact with the equipment;
- **installation safeguards** are useful when a safety characteristic can only be provided after installation (for example, the equipment has to be bolted to the floor to provide stability);
- behavioural **safeguards** are useful when the equipment requires an energy source to be **accessible**.

In practice, **safeguard** selection accounts for the nature of the energy source, the intended user, the functional requirements of the equipment, and similar considerations.

0.5.2 Equipment safeguard

An **equipment safeguard** may be a **basic safeguard**, a **supplementary safeguard**, a **double safeguard**, or a **reinforced safeguard**.

0.5.3 Installation safeguard

Installation safeguards are not controlled by the equipment manufacturer, although in some cases, **installation safeguards** may be specified in the equipment installation instructions.

Generally, with respect to equipment, an **installation safeguard** is a **supplementary safeguard**.

NOTE For example, the **supplementary safeguard** providing **protective earthing** is located partly in the equipment and partly in the installation. The **supplementary safeguard** providing **protective earthing** is not effective until the equipment is connected to the **protective earthing** of the installation.

Requirements for **installation safeguards** are not addressed in this document. However, this document does assume some **installation safeguards**, such as **protective earthing**, are in place and are effective.

0.5.4 Personal safeguard

A **personal safeguard** may be a **basic safeguard**, a **supplementary safeguard**, or a **reinforced safeguard**.

Requirements for **personal safeguards** are not addressed in this document. However, this document does assume that **personal safeguards** are available for use as specified by the manufacturer.

0.5.5 Behavioural safeguards

0.5.5.1 Introduction to behavioural safeguards

In the absence of an **equipment**, **installation**, or **personal safeguard**, a person may use a specific behaviour as a **safeguard** to avoid energy transfer and consequent injury. A behavioural **safeguard** is a voluntary or instructed behaviour intended to reduce the likelihood of transfer of energy to a body part.

Three kinds of behavioural **safeguards** are specified in this document. Each kind of behavioural **safeguard** is associated with a specific kind of person. An **instructional safeguard** is usually addressed to an **ordinary person**, but may also be addressed to an **instructed person** or a **skilled person**. A **precautionary safeguard** is used by an **instructed person**. A **skill safeguard** is used by a **skilled person**.

0.5.5.2 Instructional safeguard

An **instructional safeguard** is a means of providing information, describing the existence and location of an energy source capable of causing pain or injury, and is intended to invoke a specific behaviour on the part of a person to reduce the likelihood of transfer of energy to a body part (see Annex F).

An **instructional safeguard** may be a visual indicator (symbols or words or both) or an audible message, as applicable to the expected use of the product.

When accessing locations where the equipment needs to be energized to perform a service activity, an **instructional safeguard** may be considered acceptable protection to bypass an **equipment safeguard** such that the person is made aware of how to avoid contact with a class 2 or class 3 energy source.

If **equipment safeguards** would interfere with or prohibit the equipment function, an **instructional safeguard** may replace an **equipment safeguard**.

If exposure to an energy source capable of causing pain or injury is essential to the correct functioning of equipment, an **instructional safeguard** may be used to ensure protection of persons instead of another **safeguard**. Consideration should be given as to whether the **instructional safeguard** should require the use of a **personal safeguard**.

Provision of an **instructional safeguard** does not result in an **ordinary person** becoming an **instructed person** (see 0.5.5.3).

0.5.5.3 Precautionary safeguard (used by an instructed person)

A **precautionary safeguard** is the training and experience or supervision of an **instructed person** by a **skilled person** to use precautions to protect the **instructed person** against class 2 energy sources. **Precautionary safeguards** are not specifically prescribed in this document but are assumed to be effective when the term **instructed person** is used.

During equipment servicing, an **instructed person** may need to remove or defeat an **equipment safeguard**. In this case, an **instructed person** is expected to then apply precaution as a **safeguard** to avoid exposure to class 2 energy sources.

0.5.5.4 Skill safeguard (used by a skilled person)

A **skill safeguard** is the education, training, knowledge and experience of the **skilled person** that is used to protect the **skilled person** against class 2 or class 3 energy sources. **Skill safeguards** are not specifically prescribed in this document but are assumed to be effective when the term **skilled person** is used.

During equipment servicing, a **skilled person** may need to remove or defeat an **equipment safeguard**. In this case, a **skilled person** is expected to then apply skill as a **safeguard** to avoid injury.

0.5.6 Safeguards during ordinary or instructed person service conditions

During **ordinary person** or **instructed person** service conditions, **safeguards** for such persons may be necessary. Such **safeguards** can be **equipment safeguards**, **personal safeguards**, or **instructional safeguards**.

0.5.7 Equipment safeguards during skilled person service conditions

During **skilled person** service conditions, **equipment safeguards** should be provided to protect against the effects of a body's involuntary reaction (for example, startle) that might cause unintentional contact with a class 3 energy source located outside the view of the **skilled person**.

NOTE This **safeguard** typically applies in large equipment, where the **skilled person** needs to partially or wholly enter between two or more class 3 energy source locations while servicing.

0.5.8 Examples of safeguard characteristics

Table 3 lists some examples of **safeguard** characteristics.

Table 3 – Examples of safeguard characteristics

Safeguard	Basic safeguard	Supplementary safeguard	Reinforced safeguard
Equipment safeguard: a physical part of an equipment	Effective under normal operating conditions	Effective in the event of failure of the basic safeguard	Effective under normal operating conditions and in the event of a single fault condition elsewhere in the equipment
	Example: basic insulation	Example: supplementary insulation	Example: reinforced insulation
	Example: normal temperatures below ignition temperatures	Example: fire enclosure	Not applicable
Installation safeguard: a physical part of a man-made installation	Effective under normal operating conditions	Effective in the event of failure of an equipment basic safeguard	Effective under normal operating conditions and in the event of a single fault condition elsewhere in the equipment
	Example: wire size	Example: overcurrent protective device	Example: socket outlet
Personal safeguard: a physical device worn on the body	In the absence of any equipment safeguard , effective under normal operating conditions	Effective in the event of failure of an equipment basic safeguard	In the absence of any equipment safeguard , effective under normal operating conditions and in the event of a single fault condition elsewhere in the equipment
	Example: gloves	Example: insulating floor mat	Example: electrically-insulated glove for handling live conductors
Instructional safeguard: a voluntary or instructed behaviour intended to reduce the likelihood of transfer of energy to a body part	In the absence of any equipment safeguard , effective under normal operating conditions	Effective in the event of failure of an equipment basic safeguard	Only effective on an exceptional basis, when providing all appropriate safeguards would prevent the intended functioning of the equipment
	Example: instructional safeguard to disconnect telecommunication cable before opening the cover	Example: after opening a door, an instructional safeguard against hot parts	Example: instructional safeguard of hot parts in an office photocopier, or a continuous roll paper cutter on a commercial printer

0.6 Electrically-caused pain or injury (electric shock)

0.6.1 Models for electrically-caused pain or injury

Electrically-caused pain or injury may occur when electrical energy capable of causing pain or injury is transferred to a body part (see Figure 3).

Electrical energy transfer occurs when there are two or more electrical contacts to the body:

- the first electrical contact is between a body part and a conductive part of the equipment;
- the second electrical contact is between another body part and
 - earth, or
 - another conductive part of the equipment.

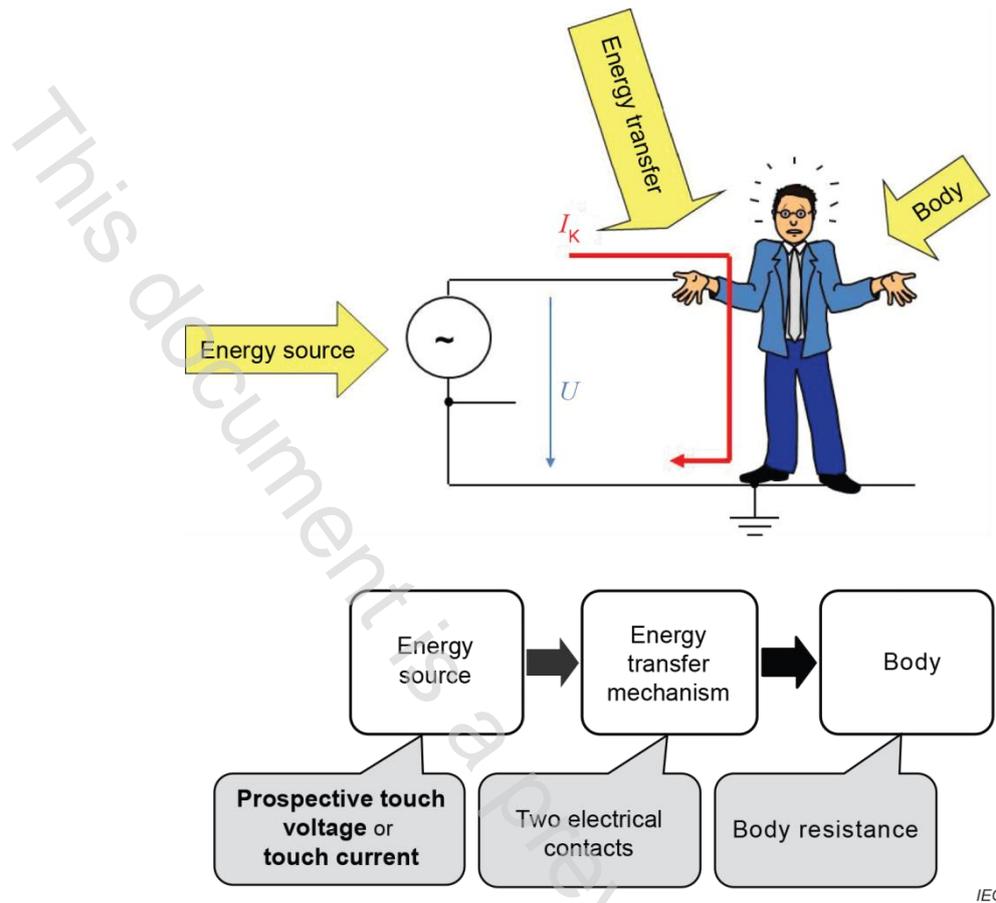


Figure 3 – Schematic and model for electrically-caused pain or injury

Depending on the magnitude, duration, wave shape, and frequency of the current, the effect on the human body varies from undetectable to detectable to painful to injurious.

0.6.2 Models for protection against electrically-caused pain or injury

One or more **safeguards** are interposed between an electrical energy source capable of causing pain or injury and a body part to protect against electrically-caused pain or injury (see Figure 4).

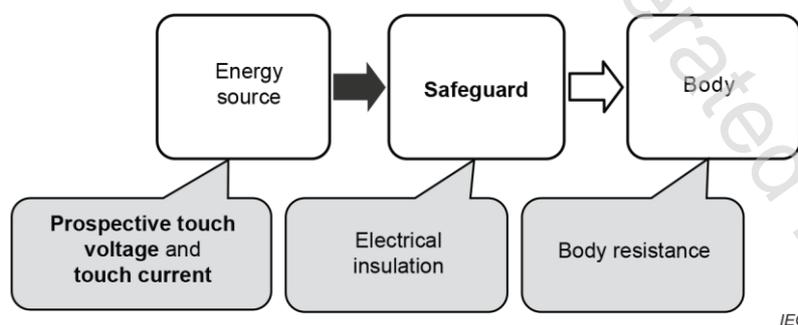


Figure 4 – Model for protection against electrically-caused pain or injury

Protection against electrically-caused pain is provided under **normal operating conditions** and **abnormal operating conditions**. For such protection, under **normal operating conditions** and **abnormal operating conditions**, a **basic safeguard** is interposed between an electrical energy source capable of causing pain and an **ordinary person**.

The most common **basic safeguard** against an electrical energy source capable of causing pain is electrical insulation (also known as **basic insulation**) interposed between the energy source and a body part.

Protection against electrically-caused injury is provided under **normal operating conditions**, **abnormal operating conditions**, and **single fault conditions**. For such protection, under **normal operating conditions** and **abnormal operating conditions**, both a **basic safeguard** and a **supplementary safeguard** are interposed between an electrical energy source capable of causing injury and an **ordinary person** (see 4.3.2.4), or an **instructed person** (see 4.3.3.3). In the event of a failure of either **safeguard**, the other **safeguard** becomes effective. The **supplementary safeguard** against an electrical energy source capable of causing injury is placed between the **basic safeguard** and a body part. A **supplementary safeguard** may be additional electrical insulation (**supplementary insulation**) or a protectively earthed conductive barrier or other construction that performs the same function.

Another **safeguard** against an electrical energy source capable of causing injury is electrical insulation (also known as **double insulation** or **reinforced insulation**) placed between the energy source and a body part.

Likewise, a **reinforced safeguard** may be placed between an electrical energy source capable of causing injury and a body part.

0.7 Electrically-caused fire

0.7.1 Models for electrically-caused fire

Electrically-caused fire is due to conversion of electrical energy to thermal energy (see Figure 5), where the thermal energy heats a fuel material followed by ignition and combustion.

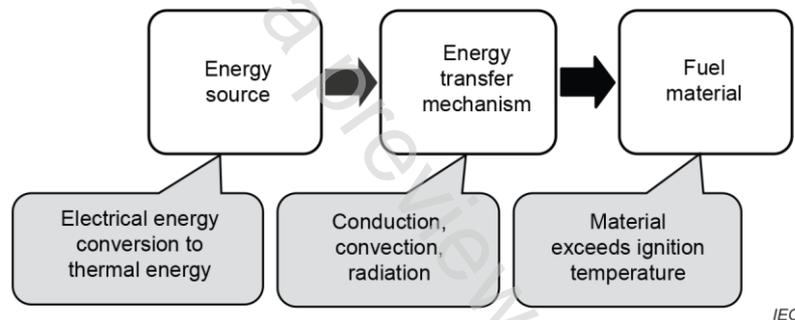


Figure 5 – Model for electrically-caused fire

Electrical energy is converted to thermal energy either in a resistance or in an arc and is transferred to a fuel material by conduction, convection, or radiation. As the fuel material heats, it chemically decomposes into gases, liquids and solids. When the gas is at its ignition temperature, the gas can be ignited by an ignition source. When the gas is at its spontaneous ignition temperature, the gas ignites by itself. Both result in fire.

0.7.2 Models for protection against electrically-caused fire

The **basic safeguard** against electrically-caused fire (see Figure 6) is that the temperature of a material, under **normal operating conditions** and **abnormal operating conditions**, does not cause the material to ignite.

The **supplementary safeguard** against electrically-caused fire reduces the likelihood of ignition or, in the case of ignition, reduces the likelihood of spread of fire.

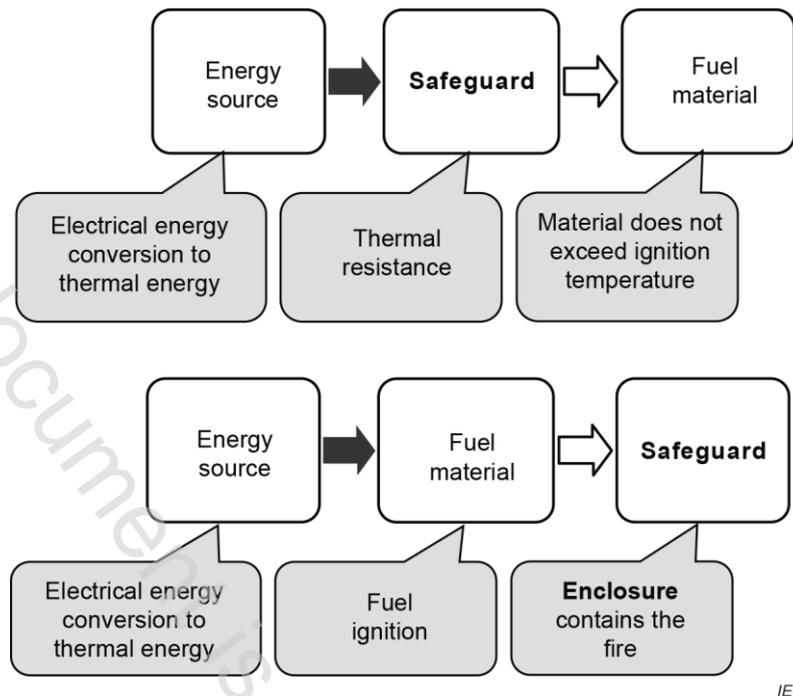


Figure 6 – Models for protection against fire

0.8 Injury caused by hazardous substances

Injury caused by **hazardous substances** is due to a chemical reaction with a body part. The extent of injury by a given substance depends on both the magnitude and duration of exposure and on the body part susceptibility to that substance.

The **basic safeguard** against injury caused by **hazardous substances** is containment of the material.

Supplementary safeguards against injury caused by **hazardous substances** may include:

- a second container or a spill-resistant container;
- containment trays;
- tamper-proof screws to prevent unauthorized access;
- **instructional safeguards**.

National and regional regulations govern the use of and exposure to **hazardous substances** used in equipment. These regulations do not enable a practical classification of **hazardous substances** in the manner in which other energy sources are classified in this document. Therefore, energy source classifications are not applied in Clause 7.

0.9 Mechanically-caused injury

Mechanically-caused injury is due to kinetic energy transfer to a body part when a collision occurs between a body part and an equipment part. The kinetic energy is a function of the relative motion between a body part and **accessible** parts of the equipment, including parts ejected from the equipment that collide with a body part.

Examples of kinetic energy sources are:

- body motion relative to sharp edges and corners;
- part motion due to rotating or other moving parts, including pinch points;
- part motion due to loosening, exploding, or imploding parts;
- equipment motion due to instability;
- equipment motion due to wall, ceiling, or rack mounting means failure;

- equipment motion due to handle failure;
- part motion due to an exploding **battery**;
- equipment motion due to cart or stand instability or failure.

The **basic safeguard** against mechanically-caused injury is a function of the specific energy source. **Basic safeguards** may include:

- rounded edges and corners;
- an **enclosure** to prevent a moving part from being **accessible**;
- an **enclosure** to prevent expelling a moving part;
- a **safety interlock** to control access to an otherwise moving part;
- means to stop the motion of a moving part;
- means to stabilize the equipment;
- robust handles;
- robust mounting means;
- means to contain parts expelled during **explosion** or implosion.

The **supplementary safeguard** against mechanically-caused injury is a function of the specific energy source. **Supplementary safeguards** may include:

- **instructional safeguards**;
- instructions and training;
- additional **enclosures** or barriers;
- **safety interlocks**.

The **reinforced safeguard** against mechanically-caused injury is a function of the specific energy source. **Reinforced safeguards** may include:

- extra thick glass on the front of a CRT;
- rack slide-rails and means of support;
- **safety interlock**.


0.10 Thermally-caused injury (skin burn)

0.10.1 Models for thermally-caused injury

Thermally-caused injury may occur when thermal energy capable of causing injury is transferred to a body part (see Figure 7).

Thermal energy transfer occurs when a body touches a hot equipment part. The extent of injury depends on the temperature difference, the thermal mass of the object, rate of thermal energy transfer to the skin, and duration of contact.

The requirements in this document only address **safeguards** against thermal energy transfer by conduction. This document does not address **safeguards** against thermal energy transfer by convection or radiation.

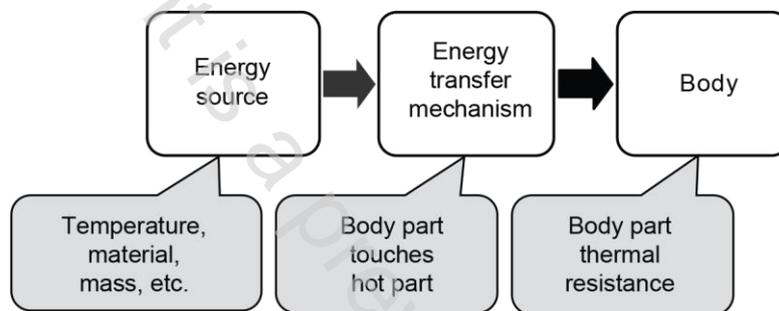


IEC

Figure 7 – Schematic and model for thermally-caused injury

Depending on the temperature, contact duration, material properties, and mass of the material, the perception of the human body varies from warmth to heat that may result in pain or injury (burn).

0.10.2 Models for protection against thermally-caused pain or injury

One or more **safeguards** are interposed between a thermal energy source capable of causing pain or injury and an **ordinary person** (see Figure 8).

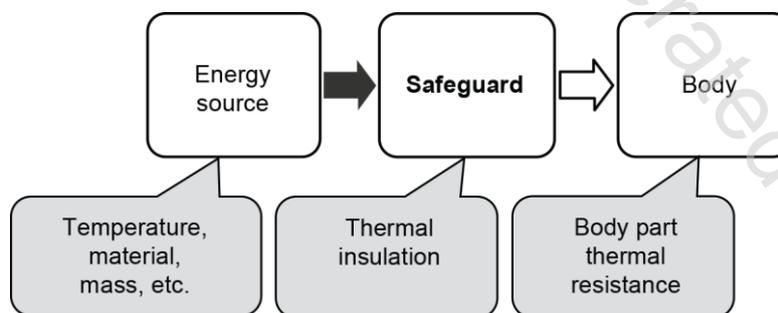

IEC

Figure 8 – Model for protection against thermally-caused injury

Under **normal operating conditions** and **abnormal operating conditions**, protection is used against thermally-cause pain. For such protection, a **basic safeguard** is interposed between a thermal energy source capable of causing pain and an **ordinary person**.

Under **normal operating conditions**, **abnormal operating conditions** and **single fault conditions**, protection is used against thermally-caused injury. For such protection, a **basic safeguard** and a **supplementary safeguard** are interposed between a thermal energy source capable of causing injury and an **ordinary person**.

The **basic safeguard** against a thermal energy source capable of causing pain or injury is thermal insulation placed between the energy source and a body part. In some cases, a **basic safeguard** against a thermal energy source capable of causing pain or injury may be an **instructional safeguard** identifying the hot parts and how to reduce the likelihood of injury. In some cases, a **basic safeguard** reduces the likelihood of a non-injurious thermal energy source from becoming a thermal energy source capable of causing pain or injury.

Examples of such **basic safeguards** are:

- control of electrical energy being converted to thermal energy (for example, a **thermostat**);
- heat sinking, etc.

The **supplementary safeguard** against a thermal energy source capable of causing injury is thermal insulation placed between the energy source and a body part. In some cases, a **supplementary safeguard** against a thermal energy source capable of causing pain or injury may be an **instructional safeguard** identifying the hot parts and how to reduce the likelihood of injury.

0.11 Radiation-caused injury

Radiation-caused injury within the scope of this document is generally attributed to one of the following energy transfer mechanisms:

- heating of a body organ caused by exposure to non-ionising radiation, such as the highly localised energy of a laser impinging on the retina; or
- auditory injury caused by over stimulation of the ear by excessive peaks or sustained loud sound, leading to physical or nerve damage; or
- X-radiation; or
- UV radiation.

Radiated energy is transferred by impingement of wave emission upon a body part.

The **basic safeguard** against radiation-caused injury is containment of the energy within an **enclosure** that is opaque to the radiated energy.

There are several **supplementary safeguards** against radiation-caused injury. The **supplementary safeguards** may include **safety interlocks** to disconnect power to the generator, tamper-proof screws to prevent unauthorized access, etc.

The **basic safeguard** against auditory injury is to limit the acoustic output of personal music players and their associated headphones and earphones.

Examples of **supplementary safeguards** against auditory pain and injury are the provision of warnings and information advising the user how to use the equipment correctly.

AUDIO/VIDEO, INFORMATION AND COMMUNICATION TECHNOLOGY EQUIPMENT –

Part 1: Safety requirements

1 Scope

This part of IEC 62368 is applicable to the safety of electrical and electronic equipment within the field of audio, video, information and communication technology, and business and office machines with a **rated voltage** not exceeding 600 V. This document does not include requirements for performance or functional characteristics of equipment.

NOTE 1 Examples of equipment within the scope of this document are given in Annex A.

NOTE 2 A **rated voltage** of 600 V is considered to include equipment rated 400/690 V.

This document is also applicable to:

- components and subassemblies intended for incorporation in this equipment. Such components and subassemblies need not comply with every requirement of this document, provided that the complete equipment, incorporating such components and subassemblies, does comply;
- external power supply units intended to supply other equipment within the scope of this document;
- accessories intended to be used with equipment within the scope of this document;
- large equipment installed in **restricted access areas**. For equipment having large machinery aspects, additional requirements may apply; and
- equipment to be used in tropical regions.

This document also includes requirements for audio/video, information and communication technology equipment intended to be installed in an **outdoor location**. The requirements for **outdoor equipment** also apply, where relevant, to **outdoor enclosures** suitable for direct installation in the field and supplied for housing audio/video, information and communication technology equipment to be installed in an **outdoor location**. See Annex Y for specific construction requirements not covered elsewhere in this document.

Each installation may have particular requirements. In addition, requirements for protection of the **outdoor equipment** against the effects of direct lightning strikes are not covered by this document.

NOTE 3 For information on this subject, see IEC 62305-1.

This document assumes a maximum altitude of 2 000 m unless otherwise specified by the manufacturer.

Additional requirements for equipment having the capability to supply DC power over commonly used communication cables, such as USB or Ethernet (PoE), are given in IEC 62368-3. IEC 62368-3 does not apply to:

- equipment supplying power using proprietary connectors; or
- equipment using a proprietary protocol for power selection.

This document specifies **safeguards** for **ordinary persons, instructed persons, and skilled persons**. Additional requirements may apply for equipment that is clearly designed or intended for use by children or specifically attractive to children.

deleted text

This document does not apply to:

- equipment with non-self-contained hazardous moving parts, such as robotic equipment; and
NOTE 6 For requirements related to robotic equipment in an industrial environment, see IEC 60204-1, IEC 60204-11, ISO 10218-1 and ISO 10218-2.
- personal care robots, including mobile servant robots, physical assistant robots, and person carrier robots; and
NOTE 7 For requirements related to personal care robots, see ISO 13482.
- power supply systems that are not an integral part of the equipment, such as motor-generator sets, **battery** backup systems and distribution transformers.

This document does not address:

- manufacturing processes except for **routine tests**;
- injurious effects of gases released by thermal decomposition or combustion;
- disposal processes;
- effects of transport (other than as specified in this document);
- effects of storage of materials, components, or the equipment itself;
- the likelihood of injury from particulate radiation such as alpha particles and beta particles;
- the likelihood of thermal injury due to radiated or convected thermal energy;
- the likelihood of injury due to flammable liquids;
- the use of the equipment in oxygen-enriched or **explosive** atmospheres;
- exposure to chemicals other than as specified in Clause 7;
- electrostatic discharge events;
- exposure to electromagnetic fields;
- environmental aspects; or
- requirements for functional safety, except for those related to **work cells**.

NOTE 8 For specific functional and software safety requirements of electronic safety-related systems (for example, protective electronic circuits), see IEC 61508-1.

NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60027-1, *Letter symbols to be used in electrical technology – Part 1: General*

IEC 60065, *Audio, video and similar electronic apparatus – Safety requirements*

IEC 60068-2-6, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-11, *Basic environmental testing procedures – Part 2-11: Tests – Test Ka: Salt mist*

IEC 60068-2-78, *Environmental testing – Part 2-78: Tests – Test Cab: Damp heat, steady state*

IEC 60073, *Basic and safety principles for man-machine interface, marking and identification – Coding principles for indicators and actuators*

IEC 60076-14, *Power transformers – Part 14: Liquid-immersed power transformers using high-temperature insulation materials*

IEC TR 60083, *Plugs and socket-outlets for domestic and similar general use standardized in member countries of IEC*

IEC 60085, *Electrical insulation – Thermal evaluation and designation*

IEC 60086-4, *Primary batteries – Part 4: Safety of lithium batteries*

IEC 60086-5, *Primary batteries – Part 5: Safety of batteries with aqueous electrolyte*

IEC 60107-1:1997, *Methods of measurement on receivers for television broadcast transmissions – Part 1: General considerations – Measurements at radio and video frequencies*

IEC 60112, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

IEC 60127 (all parts), *Miniature fuses*

IEC 60227-1, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V – Part 1: General requirements*

IEC 60227-2:1997, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V – Part 2: Test methods*

IEC 60227-2:1997/AMD1:2003

IEC 60245-1, *Rubber insulated cables – Rated voltages up to and including 450/750 V – Part 1: General requirements*

IEC 60296, *Fluids for electrotechnical applications – Unused mineral insulating oils for transformers and switchgear*

IEC 60309 (all parts), *Plugs, socket-outlets and couplers for industrial purposes*

IEC 60317 (all parts), *Specifications for particular types of winding wires*

IEC 60317-0-7:2017, *Specifications for particular types of winding wires – Part 0-7: General requirements – Fully insulated (FIW) zero-defect enamelled round copper wire*

IEC 60317-43, *Specifications for particular types of winding wires – Part 43: Aromatic polyimide tape wrapped round copper wire, class 240*

IEC 60317-56, *Specifications for particular types of winding wires – Part 56: Solderable fully insulated (FIW) zero-defect polyurethane enamelled round copper wire, class 180*

IEC 60320 (all parts), *Appliance couplers for household and similar general purposes*

IEC 60320-1, *Appliance couplers for household and similar general purposes – Part 1: General requirements*

IEC 60332-1-2, *Tests on electric and optical fibre cables under fire conditions – Part 1-2: Test for vertical flame propagation for a single insulated wire or cable – Procedure for 1 kW pre-mixed flame*

IEC 60332-1-3, *Tests on electric and optical fibre cables under fire conditions – Part 1-3: Test for vertical flame propagation for a single insulated wire or cable – Procedure for determination of flaming droplets/particles*

IEC 60332-2-2, *Tests on electric and optical fibre cables under fire conditions – Part 2-2: Test for vertical flame propagation for a single small insulated wire or cable – Procedure for diffusion flame*

IEC 60384-14, *Fixed capacitors for use in electronic equipment – Part 14: Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains*

IEC 60417, *Graphical symbols for use on equipment, available from: <<http://www.graphical-symbols.info/equipment>>*

- IEC 60529, *Degrees of protection provided by enclosures (IP Code)*
- IEC 60664-1:2007, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*
- IEC 60664-3, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*
- IEC 60691:2015, *Thermal-links – Requirements and application guide*
- IEC 60695-2-11, *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end-products (GWEPT)*
- IEC 60695-10-2, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test method*
- IEC 60695-10-3, *Fire hazard testing – Part 10-3: Abnormal heat – Mould stress relief distortion test*
- IEC 60695-11-5:2016, *Fire hazard testing – Part 11-5: Test flames – Needle-flame test method – Apparatus, confirmatory test arrangement and guidance*
- IEC 60695-11-10, *Fire hazard testing – Part 11-10: Test flames – 50 W horizontal and vertical flame test methods*
- IEC 60695-11-20:2015, *Fire hazard testing – Part 11-20: Test flames – 500 W flame test methods*
- IEC TS 60695-11-21, *Fire hazard testing – Part 11-21: Test flames – 500 W vertical flame test method for tubular polymeric materials*
- IEC 60728-11:2016, *Cable networks for television signals, sound signals and interactive services – Part 11: Safety*
- IEC 60730 (all parts), *Automatic electrical controls for household and similar use*
- IEC 60730-1:2013, *Automatic electrical controls – Part 1: General requirements*
- IEC 60738-1:2006, *Thermistors – Directly heated positive temperature coefficient – Part 1: Generic specification*
- IEC 60747-5-5:2007, *Semiconductor devices – Discrete devices – Part 5-5: Optoelectronic devices – Photocouplers*
- IEC 60747-5-5:2007/AMD1:2015
- IEC 60825-1, *Safety of laser products – Part 1: Equipment classification and requirements*
- IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)*
- IEC 60825-12, *Safety of laser products – Part 12: Safety of free space optical communication systems used for transmission of information*
- IEC 60836, *Specifications for unused silicone insulating liquids for electrotechnical purposes*
- IEC 60851-3:2009, *Winding wires – Test methods – Part 3: Mechanical properties*
- IEC 60851-3:2009/AMD1:2013
- IEC 60851-5:2008, *Winding wires – Test methods – Part 5: Electrical properties*
- IEC 60851-5:2008/AMD1:2011
- IEC 60884-1, *Plugs and socket-outlets for household and similar purposes – Part 1: General requirements*

IEC 60896-11, *Stationary lead-acid batteries – Part 11: Vented types – General requirements and methods of tests*

IEC 60896-21:2004, *Stationary lead-acid batteries – Part 21: Valve regulated types – Methods of test*

IEC 60896-22, *Stationary lead-acid batteries – Part 22: Valve regulated types – Requirements*

IEC 60906-1, *IEC system of plugs and socket-outlets for household and similar purposes – Part 1: Plugs and socket-outlets 16 A 250 V AC*

IEC 60906-2, *IEC system of plugs and socket-outlets for household and similar purposes – Part 2: Plugs and socket-outlets 15 A 125 V AC*

IEC 60947-1, *Low-voltage switchgear and controlgear – Part 1: General rules*

IEC 60947-5-5, *Low-voltage switchgear and controlgear – Part 5-5: Control circuit devices and switching elements – Electrical emergency stop device with mechanical latching function*

IEC 60950-1, *Information technology equipment – Safety – Part 1: General requirements*

IEC 60990:2016, *Methods of measurement of touch current and protective conductor current*

IEC 60998-1, *Connecting devices for low-voltage circuits for household and similar purposes – Part 1: General requirements*

IEC 60999-1, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm² up to 35 mm² (included)*

IEC 60999-2, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 2: Particular requirements for clamping units for conductors above 35 mm² up to 300 mm² (included)*

IEC 61039, *Classification of insulating liquids*

IEC 61051-1, *Varistors for use in electronic equipment – Part 1: Generic specification*

IEC 61051-2:1991, *Varistors for use in electronic equipment – Part 2: Sectional specification for surge suppression varistors*

IEC 61051-2:1991/AMD1:2009

IEC 61056-1, *General purpose lead-acid batteries (valve-regulated types) – Part 1: General requirements, functional characteristics – Methods of test*

IEC 61056-2, *General purpose lead-acid batteries (valve-regulated types) – Part 2: Dimensions, terminals and marking*

IEC 61058-1:2016, *Switches for appliances – Part 1: General requirements*

IEC 61099, *Insulating liquids – Specifications for unused synthetic organic esters for electrical purposes*

IEC 61204-7, *Low-voltage power supplies – Part 7: Safety requirements*

IEC 61293, *Marking of electrical equipment with ratings related to electrical supply – Safety requirements*

IEC 61427 (all parts), *Secondary cells and batteries for renewable energy storage – General requirements and methods of test*

IEC TS 61430, *Secondary cells and batteries – Test methods for checking the performance of devices designed for reducing explosion hazards – Lead-acid starter batteries*

IEC 61434, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Guide to designation of current in alkaline secondary cell and battery standards*

IEC 61558-1:2017, *Safety of power transformers, power supplies, reactors and similar products – Part 1: General requirements and tests*

IEC 61558-2-16, *Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V – Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units*

IEC 61643-11:2011, *Low-voltage surge protective devices – Part 11: Surge protective devices connected to low-voltage power systems – Requirements and test methods*

IEC 61643-331:2017, *Components for low-voltage surge protective devices – Part 331: Performance requirements and test methods for metal oxide varistors (MOV)*

IEC 61810-1:2015, *Electromechanical elementary relays – Part 1: General and safety requirements*

IEC 61959, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Mechanical tests for sealed portable secondary cells and batteries*

IEC 61965, *Mechanical safety of cathode ray tubes*

IEC 61984, *Connectors – Safety requirements and tests*

IEC 62133 (all parts), *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications*

IEC 62133-1, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 1: Nickel systems*

IEC 62133-2, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary lithium cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems*

IEC 62281, *Safety of primary and secondary lithium cells and batteries during transport*

IEC TS 62332-1, *Electrical insulation systems (EIS) – Thermal evaluation of combined liquid and solid components – Part 1: General requirements*

IEC 62440:2008, *Electric cables with a rated voltage not exceeding 450/750 V – Guide to use*

IEC 62471:2006, *Photobiological safety of lamps and lamp systems*

IEC 62471-5:2015, *Photobiological safety of lamps and lamp systems – Part 5: Image projectors*

IEC 62485-2, *Safety requirements for secondary batteries and battery installations – Part 2: Stationary batteries*

IEC 62619, *Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for secondary lithium cells and batteries, for use in industrial applications*

ISO 37, *Rubber, vulcanized or thermoplastic – Determination of tensile stress-strain properties*

ISO 178, *Plastics – Determination of flexural properties*

ISO 179-1, *Plastics – Determination of Charpy impact properties – Part 1: Non-instrumented impact test*

ISO 180, *Plastics – Determination of Izod impact strength*

ISO 306, *Plastics – Thermoplastic materials – Determination of Vicat softening temperature (VST)*

ISO 527 (all parts), *Plastics – Determination of tensile properties*

ISO 871, *Plastics – Determination of ignition temperature using a hot-air furnace*

ISO 1798, *Flexible cellular polymeric materials – Determination of tensile strength and elongation at break*

ISO 1817:2015, *Rubber, vulcanized or thermoplastic – Determination of the effect of liquids*

ISO 2719, *Determination of flash point – Pensky-Martens closed cup method*

ISO 3231, *Paints and varnishes – Determination of resistance to humid atmospheres containing sulfur dioxide*

ISO 3679, *Determination of flash no-flash and flash point – Rapid equilibrium closed cup method*

ISO 3864 (all parts), *Graphical symbols – Safety colours and safety signs*

ISO 3864-2, *Graphical symbols – Safety colours and safety signs – Part 2: Design principles for product safety labels*

ISO 4892-1, *Plastics – Methods of exposure to laboratory light sources – Part 1: General guidance*

ISO 4892-2, *Plastics – Methods of exposure to laboratory light sources – Part 2: Xenon-arc lamps*

ISO 4892-4, *Plastics – Methods of exposure to laboratory light sources – Part 4: Open-flame carbon-arc lamps*

ISO 7000, *Graphical symbols for use on equipment – Registered symbols, available from: <<http://www.graphical-symbols.info/equipment>>*

ISO 7010, *Graphical symbols – Safety colours and safety signs – Safety signs used in workplaces and public areas*

ISO 8256, *Plastics – Determination of tensile-impact strength*

ISO 9772, *Cellular plastics – Determination of horizontal burning characteristics of small specimens subjected to a small flame*

ISO 9773, *Plastics – Determination of burning behaviour of thin flexible vertical specimens in contact with a small-flame ignition source*

ISO 14993, *Corrosion of metals and alloys – Accelerated testing involving cyclic exposure to salt mist, “dry” and “wet” conditions*

ISO 21207, *Corrosion tests in artificial atmospheres – Accelerated corrosion tests involving alternate exposure to corrosion-promoting gases, neutral salt-spray and drying*

ASTM D412, *Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers – Tension*

ASTM D471-98, *Standard Test Method for Rubber Property – Effect of Liquids*

ASTM D3574, *Standard Test Methods for Flexible Cellular Materials – Slab, Bonded, and Molded Urethane Foams*