



Sampling procedures for inspection by attributes —

Part 1:

Sampling plans indexed by acceptable quality level (AQL) for lot-by-lot inspection

TECHNICAL CORRIGENDUM 1

Règles d'échantillonnage pour les contrôles par attributs —

Partie 1: Plans d'échantillonnage pour les contrôles lot par lot, indexés d'après le niveau de qualité acceptable (NQA)


RECTIFICATIF TECHNIQUE 1

Technical corrigendum 1 to International Standard ISO 2859-1:1989 was prepared by Technical Committee ISO/TC 69, *Applications of statistical methods*, Sub-Committee SC 5, *Acceptance sampling*.

Page 48

Chart H should be replaced with the corrected version enclosed. The curve furthest to the left has been renumbered as "0,25". The numbers on the horizontal axis have been moved one place to the right.

Chart H — Operating characteristic curves for single sampling plans
(Curves for double and multiple sampling are matched as closely as practicable)

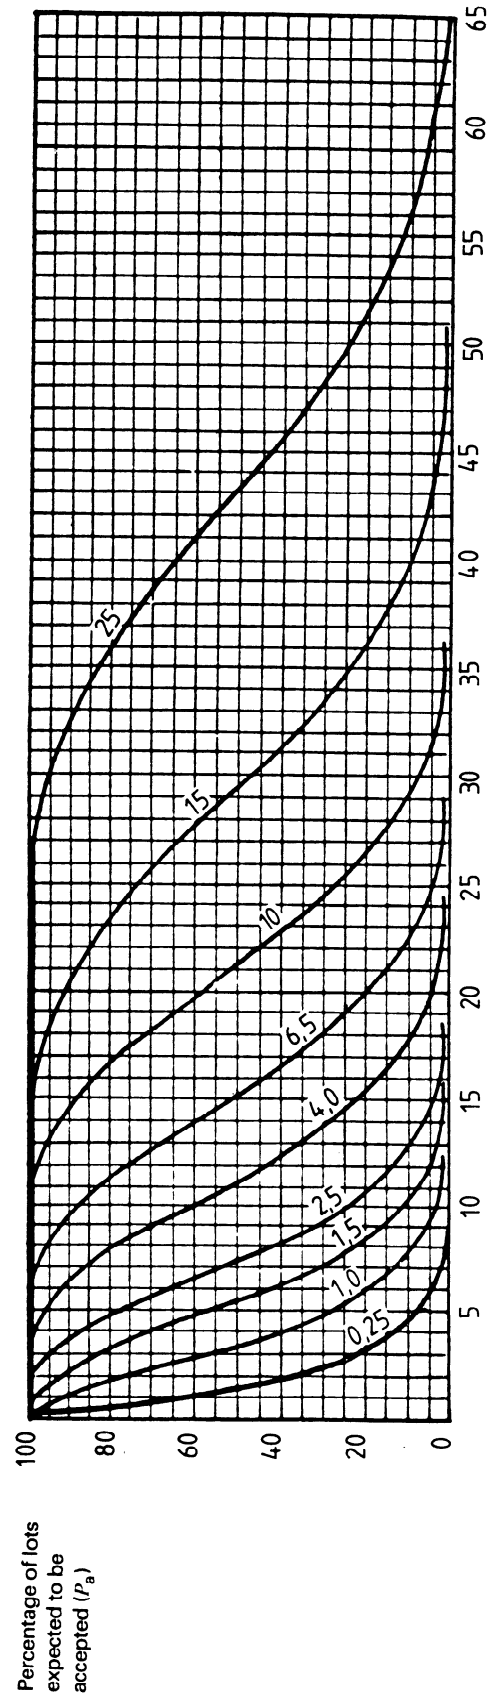

NOTE — Values on curves are Acceptable Quality Levels (AQLs) for normal inspection.