

INTERNATIONAL
STANDARD

ISO/IEC/
IEEE
8802-1Q

First edition
2016-03-15

Corrigendum 1
2017-10

**Information technology —
Telecommunications and information
exchange between systems — Local
and metropolitan area networks —
Specific requirements —**

**Part 1Q:
Bridges and bridged networks**

**TECHNICAL CORRIGENDUM 1:
Technical and editorial corrections**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseaux locaux et métropolitains
— Exigences spécifiques —*

*Partie 1Q: Ponts et réseaux pontés
RECTIFICATIF TECHNIQUE 2: Corrections techniques et
rédactionnelles*



Reference number
ISO/IEC/IEEE 8802-1Q:2016/Cor.1:2017(E)

© IEEE 2016



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2016

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO or IEEE at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

stds.ipr@ieee.org
www.ieee.org

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

The main task of ISO/IEC JTC 1 is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is called to the possibility that implementation of this standard may require the use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. ISO/IEEE is not responsible for identifying essential patents or patent claims for which a license may be required, for conducting inquiries into the legal validity or scope of patents or patent claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance or a Patent Statement and Licensing Declaration Form, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from ISO or the IEEE Standards Association.

ISO/IEC/IEEE 8802-1Q:2016/Cor.1:2017 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE 802.1Q-2014/Cor 1-2015). It was adopted by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*, in parallel with its approval by the ISO/IEC national bodies, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE. IEEE is responsible for the maintenance of this document with participation and input from ISO/IEC national bodies.

IEEE Std 802.1Q™-2014/Cor 1-2015

(Corrigendum to
IEEE Std 802.1Q-2014)

**IEEE Standard for
Local and metropolitan area networks—**

Bridges and Bridged Networks—

**Corrigendum 1: Technical and editorial
corrections**

Sponsor

**LAN/MAN Standards Committee
of the
IEEE Computer Society**

Approved 5 December 2015

IEEE-SA Standards Board

Abstract: Correction of technical and editorial errors identified by the IEEE 802.1 maintenance activity are presented in this document.

Keywords: corrigendum, Bridged Local Area Networks, ECMP, Equal Cost Multiple Paths, IEEE 802.1Q™, LANs, local area networks, MAC Bridges, MANs, metropolitan area networks, Shortest Path Bridging, Virtual Bridged Local Area Networks

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2016 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 12 January 2016. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-0112-8 STD20519

IEEE prohibits discrimination, harassment and bullying. For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>. No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Standards Documents.”

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. An official IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <http://ieeexplore.ieee.org/xpl/standards.jsp> or contact IEEE at the address listed previously. For more information about the IEEE SA or IEEE's standards development process, visit the IEEE-SA Website at <http://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <http://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <http://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patent Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

At the time this corrigendum was submitted to the IEEE-SA Standards Board for approval, the IEEE 802.1 Working Group had the following membership:

Glenn Parsons, *Chair*
John Messenger, *Vice Chair and Chair, Maintenance Task Group*
Tony Jeffree, *Editor*

Christian Boiger
 Paul Bottorff
 David Chen
 Feng Chen
 Weiying Cheng
 Rodney Cummings
 Janos Farkas
 Norman Finn
 Geoffrey Garner
 Eric Gray
 Craig Gunther
 Stephen Haddock
 Mark Hantel
 Marc Holness
 Michael Johas Teener

Hal Keen
 Stephan Kehrer
 Marcel Kiessling
 Philippe Klein
 Jouni Korhonen
 Yizhou Li
 Christophe Mangin
 Tom McBeath
 James McIntosh
 Hiroki Nakano
 Bob Noseworthy
 Donald R. Pannell
 Walter Pieniac
 Karen Randall
 Maximilian Riegel
 Dan Romascanu

Jessy Rouyer
 Panagiotis Saltsidis
 Michael Seaman
 Daniel Sexton
 Johannes Specht
 Wilfried Steiner
 Patricia Thaler
 David Thornburg
 Jeremy Touve
 Paul Unbehagen
 Karl Weber
 Brian Weis
 Jordon Woods
 Helge Zinner
 Juan Carlos Zuniga

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

Iwan Adhicandra
 Thomas Alexander
 Butch Anton
 Lee Armstrong
 Stefan Aust
 Christian Boiger
 Nancy Bravin
 William Byrd
 Juan Carreon
 Rodney Cummings
 Janos Farkas
 Avraham Freedman
 Yukihiro Fujimoto
 David Gregson
 Randall Groves
 Craig Gunther
 Stephen Haddock
 Jerome Henry
 Marco Hernandez
 Guido Hiertz
 Werner Hoelzl
 Victor Hou
 C. Huntley

Noriyuki Ikeuchi
 Sergiu Iordanescu
 Atsushi Ito
 Tony Jeffree
 Michael Johas Teener
 Adri Jovin
 Shinkyo Kaku
 Piotr Karocki
 Stuart Kerry
 Yongbum Kim
 Mark Laubach
 David Lewis
 Arthur H. Light
 William Lumpkins
 Michael Lynch
 Elvis Maculuba
 Jonathon McLendon
 Richard Mellitz
 Charles Moorwood
 Michael Newman
 Nick S.A. Nikjoo
 Satoshi Obara
 Alon Regev

Maximilian Riegel
 Robert Robinson
 Benjamin Rolfe
 Dan Romascanu
 Jessy Rouyer
 Bartien Sayogo
 Michael Seaman
 Thomas Starai
 Eugene Stoudenmire
 Walter Struppler
 Michael Swearingen
 Patricia Thaler
 Mark-Rene Uchida
 Lorenzo Vangelista
 Dmitri Varsanofiev
 George Vlantis
 Khurram Waheed
 Stephen Webb
 Hung-Yu Wei
 Natalie Wienckowski
 Oren Yuen
 Zhen Zhou

When the IEEE-SA Standards Board approved this corrigendum on 5 December 2015, it had the following membership:

John D. Kulick, *Chair*
Jon Walter Rosdahl, *Vice Chair*
Richard H. Hulett, *Past Chair*
Konstantinos Karachalios, *Secretary*

Masayuki Ariyoshi
Ted Burse
Stephen Dukes
Jean-Philippe Faure
J. Travis Griffith
Gary Hoffman
Michael Janezic

Joseph L. Koepfinger*
David J. Law
Hung Ling
Andrew Myles
T. W. Olsen
Glenn Parsons
Ronald C. Petersen
Annette D. Reilly

Stephen J. Shellhammer
Adrian P. Stephens
Yatin Trivedi
Phillip Winston
Don Wright
Yu Yuan
Daidi Zhong

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.1Q-2014/Cor 1-2015, IEEE Standard for Local and metropolitan area networks—Bridges and Bridged Networks—Corrigendum 1: Technical and editorial corrections.

This corrigendum to IEEE Std 802.1Q-2014 corrects the small number of errors to the base text identified by the IEEE 802.1 maintenance activity. These changes are needed in order to correct technical and/or editorial errors in the existing text.

Contents

12. Bridge management	2
12.22 Stream Reservation Protocol (SRP) entities	2
17. Management Information Base (MIB)	3
17.2 Structure of the MIB	3
17.7 MIB modules	3
25. Support of the MAC Service by PBBNs	31
25.2 Customer service interface.....	31
32. Congestion notification protocol	32
32.14 RP procedures	32
33. Encoding of congestion notification PDUs	33
33.4 Congestion Notification Message PDU format	33
35. Stream Reservation Protocol (SRP).....	34
35.1 Multiple Stream Registration Protocol (MSRP).....	34
35.2 Definition of the MSRP application	35
Annex A (normative) PICS proforma—Bridge implementations	37
A.37 Shortest Path Bridging (SPB)	37
Annex B (normative) PICS proforma—End station implementations	38
B.10 Stream Reservation Protocol (SRP).....	38
Annex D (normative) IEEE 802.1 Organizationally Specific TLVs	39
D.1 Requirements of the IEEE 802.1 Organizationally Specific TLV sets.....	39
D.2 Organizationally Specific TLV definitions.....	39
D.3 IEEE 802.1 Organizationally Specific TLV management.....	39
D.4 PICS proforma for IEEE 802.1 Organizationally Specific TLV extensions	40
D.5 IEEE 802.1/LLDP extension MIB	41
Annex Q (informative) Bibliography	109

Figures

Figure 35-2	Format of the components of the reservation FirstValue fields.....	35
-------------	--	----

Tables

Table 12-17	SRP Reservations Table row elements	2
Table 17-20	SRP MIB structure and object cross reference	3
Table 35-6	Reservation Failure Codes	36
Table D-1	IEEE 802.1 Organizationally Specific TLVs specified in this standard	39
Table D-12	IEEE 802.1/LLDP extension MIB object cross reference	41

IEEE Standard for Local and metropolitan area networks—

Bridges and Bridged Networks—

Corrigendum 1: Technical and editorial corrections

(This corrigendum is based on IEEE Std 802.1Q™-2014.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained here into the base document and its other amendments to form the new comprehensive standard.

Editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed either by using ~~strike~~~~through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.¹

IMPORTANT NOTICE: IEEE Standards documents are not intended to ensure safety, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.

¹Notes in text, tables, and figures are given for information only, and do not contain requirements needed to implement the standard.

12. Bridge management

12.22 Stream Reservation Protocol (SRP) entities

12.22.5 SRP Reservations Table

Change row 5 of Table 12-17 as follows:

Table 12-17—SRP Reservations Table row elements

Name	Data type	Operations supported	Conformance	References
Failed Bridge ID <u>system ID</u>	BridgeId	R	BE	35.2.2.8.7(a)

17. Management Information Base (MIB)

17.2 Structure of the MIB

17.2.14 Structure of the IEEE8021-SRP-MIB

Change row 31 and row 32 of Table 17-20 as follows:

Table 17-20—SRP MIB structure and object cross reference

MIB table	MIB object	References
	ieee8021SrpReservationFailure BridgeId SystemId	Bridge-system ID of Bridge-system that changed Talker Advertise to Talker Failed, 12.22.5, 35.2.2.8.7a.
	ieee8021SrpReservationFailureCode	Failure Code associated with Bridge-system that changed Talker Advertise to Talker Failed, 12.22.5, 35.2.2.8.7b.

17.7 MIB modules

17.7.12 Definitions for the IEEE8021-FQTSS-MIB module

Replace the text of 17.7.12 with the following:

```
IEEE8021-FQTSS-MIB DEFINITIONS ::= BEGIN

-- =====
-- MIB for support of the Forwarding & Queuing Enhancements
-- for Time Sensitive Streams (FQTSS) in 802.1Q Bridges.
-- =====

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Unsigned32
        FROM SNMPv2-SMI
    TEXTUAL-CONVENTION,
    TruthValue,
    RowStatus
        FROM SNMPv2-TC
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ieee802dot1mibs,
    IEEE8021PriorityValue
        FROM IEEE8021-TC-MIB
    ieee8021BridgeBaseComponentId,
    ieee8021BridgeBasePort
        FROM IEEE8021-BRIDGE-MIB
    ;

ieee8021FqtssMib MODULE-IDENTITY
    LAST-UPDATED "201512020000Z" -- December 2, 2015
    ORGANIZATION "IEEE 802.1 Working Group"
    CONTACT-INFO
        " WG-URL: http://ieee802.org/1/
          WG-E-Mail: STDS-802-1-L@LISTSERV.IEEE.ORG

          Contact: IEEE 802.1 Working Group Chair
          Postal: C/O IEEE 802.1 Working Group
                  IEEE Standards Association
                  445 Hoes Lane
                  Piscataway
                  NJ 08854
                  USA
          E-mail: STDS-802-1-L@LISTSERV.IEEE.ORG"
    DESCRIPTION
        "The Bridge MIB module for managing devices that support
        the Forwarding and Queuing Enhancements
        for Time Sensitive Streams.

        Unless otherwise indicated, the references in this MIB
        module are to IEEE Std 802.1Q-2014.

        Copyright (C) IEEE (2015).
        This version of this MIB module is part of IEEE802.1Q;
        see the draft itself for full legal notices."
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

REVISION "201512020000Z" -- December 2, 2015

DESCRIPTION

"Published as part of IEEE Std 802.1Q 2014 Cor-1.
ETS code point added to the textual convention
IEEE8021FqtssTxSelectionAlgorithmIDValue "

REVISION "201412150000Z" -- December 15, 2014

DESCRIPTION

"Published as part of IEEE Std 802.1Q 2014 revision.
Cross references updated and corrected."

REVISION "201102270000Z" -- February 27, 2011

DESCRIPTION

"Minor edits to contact information etc. as part of
2011 revision of IEEE Std 802.1Q."

REVISION "200910010000Z" -- October 1, 2009

DESCRIPTION

"Initial revision, included in IEEE 802.1Qav."
::= { ieee802dot1mibs 16 }

-- =====
-- Textual Conventions
-- =====

IEEE8021FqtssTrafficClassValue ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"An 802.1 FQTSS traffic class value.
This is the numerical value associated with a traffic
class in a Bridge. Larger values are associated with
higher priority traffic classes."

REFERENCE "12.20.1"

SYNTAX Unsigned32 (0..7)

IEEE8021FqtssDeltaBandwidthValue ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"An 802.1 FQTSS delta bandwidth percentage,
represented as a fixed point number scaled by
1,000,000."

REFERENCE "12.20.1, 34.4"

SYNTAX Unsigned32 (0..100000000)

IEEE8021FqtssTxSelectionAlgorithmIDValue ::= TEXTUAL-CONVENTION

DISPLAY-HINT "d"

STATUS current

DESCRIPTION

"An 802.1 transmission selection algorithm identifier
value. This is an integer, with the following
interpretation placed on the value:

- 0: Strict priority algorithm,
- 1: Credit-based shaper algorithm,
- 2: Enhanced Transmission Selection algorithm,
- 3-255: Reserved for future standardization,
- 256-4294967295: Vendor-specific transmission selection

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

        algorithm identifiers, consisting of a
        four-octet integer, where the most
        significant 3 octets hold an OUI or CID value,
        and the least significant octet holds
        an integer value in the range 0-255
        assigned by the owner of the OUI or CID."
REFERENCE   "8.6.8, 12.20.2"
SYNTAX      Unsigned32

-- =====
-- subtrees in the FQTSS MIB
-- =====

ieee8021FqtssNotifications
    OBJECT IDENTIFIER ::= { ieee8021FqtssMib 0 }

ieee8021FqtssObjects
    OBJECT IDENTIFIER ::= { ieee8021FqtssMib 1 }

ieee8021FqtssConformance
    OBJECT IDENTIFIER ::= { ieee8021FqtssMib 2 }

ieee8021FqtssBap
    OBJECT IDENTIFIER ::= { ieee8021FqtssObjects 1 }

ieee8021FqtssMappings
    OBJECT IDENTIFIER ::= { ieee8021FqtssObjects 2 }

-- =====
-- The ieee8021FqtssBap subtree
-- This subtree defines the objects necessary for the management
-- of bandwidth allocation for queues that support FQTSS.
-- =====

-- =====
-- the ieee8021FqtssBapTable
-- =====

ieee8021FqtssBapTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021FqtssBapEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "A table containing a set of bandwidth availability
        parameters for each traffic class that supports the
        credit-based shaper algorithm.
        All writable objects in this table must be
        persistent over power up restart/reboot."
    REFERENCE    "12.20.1"
    ::= { ieee8021FqtssBap 1 }

ieee8021FqtssBapEntry OBJECT-TYPE
    SYNTAX      Ieee8021FqtssBapEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "A list of objects containing bandwidth allocation
        information for each traffic class that supports the
        credit-based shaper algorithm. Rows in the table are

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

automatically created and deleted as a result of the operation of the algorithm described in 34.5. "

```

INDEX { ieee8021BridgeBaseComponentId,
        ieee8021BridgeBasePort,
        ieee8021FqtssBAPTrafficClass }
 ::= { ieee8021FqtssBapTable 1 }

```

```

Ieee8021FqtssBapEntry ::=
SEQUENCE {
    ieee8021FqtssBAPTrafficClass
        IEEE8021FqtssTrafficClassValue,
    ieee8021FqtssDeltaBandwidth
        IEEE8021FqtssDeltaBandwidthValue,
    ieee8021FqtssOperIdleSlopeMs
        Unsigned32,
    ieee8021FqtssOperIdleSlopeLs
        Unsigned32,
    ieee8021FqtssAdminIdleSlopeMs
        Unsigned32,
    ieee8021FqtssAdminIdleSlopeLs
        Unsigned32,
    ieee8021FqtssBapRowStatus
        RowStatus
}

```

ieee8021FqtssBAPTrafficClass OBJECT-TYPE

```

SYNTAX      IEEE8021FqtssTrafficClassValue
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The traffic class number associated with the row of
    the table.

    A row in this table is created for each traffic class
    that supports the credit-based shaper algorithm. The
    recommended mappings of priorities to traffic classes
    for support of the credit-based shaper algorithm are
    described in 34.5."
REFERENCE   "12.20.2, 34.3, 34.5"
 ::= { ieee8021FqtssBapTable 1 }

```

ieee8021FqtssDeltaBandwidth OBJECT-TYPE

```

SYNTAX      IEEE8021FqtssDeltaBandwidthValue
UNITS       "percent"
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "The value of the deltaBandwidth parameter
    for the traffic class.
    This value is represented as a fixed point number
    scaled by a factor of 1,000,000; i.e., 100,000,000
    (the maximum value) represents 100%.

    The default value of the deltaBandwidth parameter
    for the highest numbered traffic class that supports
    the credit-based shaper algorithm is 75%; for all
    lower numbered traffic classes that support the
    credit-based shaper algorithm the default value is 0%."

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.20.1, 34.3"
::= { ieee8021FqtssBapEntry 2 }

ieee8021FqtssOperIdleSlopeMs OBJECT-TYPE

SYNTAX Unsigned32

UNITS "bits per second"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The most significant 32 bits of the bandwidth, in bits per second, that is currently allocated to the traffic class (idleSlope(N)). This object MUST be read at the same time as ieee8021FqtssOperIdleSlopeLs, which represents the LS 32 bits of the value, in order for the read operation to succeed.

If SRP is supported and in operation, then the reserved bandwidth is determined by the operation of SRP; otherwise, the value of ieee8021FqtssOperIdleSlopeMs is equal to the value of ieee8021FqtssAdminIdleSlopeMs.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.20.1, 34.3"
::= { ieee8021FqtssBapEntry 3 }

ieee8021FqtssOperIdleSlopeLs OBJECT-TYPE

SYNTAX Unsigned32

UNITS "bits per second"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The least significant 32 bits of the bandwidth, in bits per second, that is currently allocated to the traffic class (idleSlope(N)). This object MUST be read at the same time as ieee8021FqtssOperIdleSlopeMs, which represents the LS 32 bits of the value, in order for the read operation to succeed.

If SRP is supported and in operation, then the reserved bandwidth is determined by the operation of SRP; otherwise, the value of ieee8021FqtssOperIdleSlopeLs is equal to the value of ieee8021FqtssAdminIdleSlopeMs.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.20.1, 34.3"
::= { ieee8021FqtssBapEntry 4 }

ieee8021FqtssAdminIdleSlopeMs OBJECT-TYPE

SYNTAX Unsigned32

UNITS "bits per second"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The most significant 32 bits of the bandwidth,

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

in bits per second, that the manager desires to allocate to the traffic class as `idleSlope(N)`. This object MUST be read or written at the same time as `ieee8021FqtssAdminIdleSlopeLs`, which represents the LS 32 bits of the value, in order for the read or write operation to succeed.

If SRP is supported and in operation, then the reserved bandwidth is determined by the operation of SRP, and any changes to the value of this object have no effect on the operational value of `idleSlope(N)`.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.20.1, 34.3"

DEFVAL { 0 }

::= { ieee8021FqtssBapEntry 5 }

`ieee8021FqtssAdminIdleSlopeLs` OBJECT-TYPE

SYNTAX Unsigned32

UNITS "bits per second"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The least significant 32 bits of the bandwidth, in bits per second, that the manager desires to allocate to the traffic class as `idleSlope(N)`. This object MUST be read or written at the same time as `ieee8021FqtssAdminIdleSlopeMs`, which represents the LS 32 bits of the value, in order for the read or write operation to succeed.

If SRP is supported and in operation, then the reserved bandwidth is determined by the operation of SRP, and any changes to the value of this object have no effect on the operational value of `idleSlope(N)`.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.20.1, 34.3"

DEFVAL { 0 }

::= { ieee8021FqtssBapEntry 6 }

`ieee8021FqtssBapRowStatus` OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Indicates the status of an entry (row) in this table, and is used to create/delete entries.

The corresponding instances of the following objects must be set before this object can be made active(1):

`ieee8021FqtssBAPTrafficClass`
`ieee8021FqtssDeltaBandwidth`
`ieee8021FqtssOperIdleSlopeMs`
`ieee8021FqtssOperIdleSlopeLs`
`ieee8021FqtssAdminIdleSlopeMs`
`ieee8021FqtssAdminIdleSlopeLs`

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

The corresponding instances of the following objects
may not be changed while this object is active(1):
ieee8021FqtssBAPTrafficClass"

```
 ::= { ieee8021FqtssBapEntry 7 }
```

```
-- =====
-- The ieee8021FqtssMappings subtree
-- This subtree defines the objects necessary for the assignment
-- of transmission selection algorithms to traffic classes,
-- and definition of regeneration table override values.
-- =====

-- =====
-- the ieee8021FqtssTxSelectionAlgorithmTable
-- =====
```

ieee8021FqtssTxSelectionAlgorithmTable OBJECT-TYPE

SYNTAX SEQUENCE OF Ieee8021FqtssTxSelectionAlgorithmEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table containing the assignment of transmission selection algorithms to traffic classes for the Port. This table provides management of the Transmission Selection Algorithm Table defined in 8.6.8.

For a given Port, a row in the table exists for each traffic class that is supported by the Port.

The default assignments of transmission selection algorithms to traffic classes in the table are made on instantiation of the table, in accordance with the defaults defined in 8.6.8 and 34.5.

All writable objects in this table must be persistent over power up restart/reboot."

REFERENCE "8.6.8, 12.20.2, 34.5"

```
 ::= { ieee8021FqtssMappings 1 }
```

ieee8021FqtssTxSelectionAlgorithmEntry OBJECT-TYPE

SYNTAX Ieee8021FqtssTxSelectionAlgorithmEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A list of objects that contain the mapping of a traffic class value to a transmission selection algorithm value."

INDEX { ieee8021BridgeBaseComponentId,
ieee8021BridgeBasePort,
ieee8021FqtssTrafficClass }

```
 ::= { ieee8021FqtssTxSelectionAlgorithmTable 1 }
```

Ieee8021FqtssTxSelectionAlgorithmEntry ::=

```
 SEQUENCE {
    ieee8021FqtssTrafficClass
        IEEE8021FqtssTrafficClassValue,
    ieee8021FqtssTxSelectionAlgorithmID
        IEEE8021FqtssTxSelectionAlgorithmIDValue
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

    }

ieee8021FqtssTrafficClass OBJECT-TYPE
    SYNTAX      IEEE8021FqtssTrafficClassValue
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The traffic class to which the transmission selection
        algorithm is assigned.

        The value of this object MUST be retained across
        reinitializations of the management system."
    REFERENCE   "8.6.8, 12.20.2, 34.5"
    ::= { ieee8021FqtssTxSelectionAlgorithmEntry 1 }

ieee8021FqtssTxSelectionAlgorithmID OBJECT-TYPE
    SYNTAX      IEEE8021FqtssTxSelectionAlgorithmIDValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The identifier of the transmission selection algorithm
        assigned to the traffic class.

        The value of this object MUST be retained across
        reinitializations of the management system."
    REFERENCE   "8.6.8, 12.20.2, 34.5"
    ::= { ieee8021FqtssTxSelectionAlgorithmEntry 2 }

-- =====
-- the ieee8021FqtssSrpRegenOverrideTable
-- =====

ieee8021FqtssSrpRegenOverrideTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021FqtssSrpRegenOverrideEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table containing the set of priority regeneration
        table override values for the Port.

        The recommended default values of priorities
        associated with SR classes, and the corresponding
        override values, are defined in 6.9.4.

        All writable objects in this table must be
        persistent over power up restart/reboot."
    REFERENCE   "35.1.4, 6.9.4, 12.20.3"
    ::= { ieee8021FqtssMappings 2 }

ieee8021FqtssSrpRegenOverrideEntry OBJECT-TYPE
    SYNTAX      Ieee8021FqtssSrpRegenOverrideEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A list of objects that contain the mapping of a
        priority value to a priority regeneration override
        value, and a boundary port indication.
        Rows in the table exist for all priorities that are

```

```

    associated with SR classes."
INDEX { ieee8021BridgeBaseComponentId,
        ieee8021BridgeBasePort,
        ieee8021FqtssSrClassPriority }
 ::= { ieee8021FqtssSrpRegenOverrideTable 1 }

Ieee8021FqtssSrpRegenOverrideEntry ::=
SEQUENCE {
    ieee8021FqtssSrClassPriority
        IEEE8021PriorityValue,
    ieee8021FqtssPriorityRegenOverride
        IEEE8021PriorityValue,
    ieee8021FqtssSrpBoundaryPort
        TruthValue
}

ieee8021FqtssSrClassPriority OBJECT-TYPE
SYNTAX      IEEE8021PriorityValue
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "The priority value that is overridden at the
    SRP domain boundary. "
REFERENCE   "35.1.4, 6.9.4, 12.20.3"
 ::= { ieee8021FqtssSrpRegenOverrideEntry 1 }

ieee8021FqtssPriorityRegenOverride OBJECT-TYPE
SYNTAX      IEEE8021PriorityValue
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "The priority value that is used to override the
    priority regeneration table entry at the SRP
    domain boundary.

    The value of this object MUST be retained across
    reinitializations of the management system."
REFERENCE   "35.1.4, 6.9.4, 12.20.3"
 ::= { ieee8021FqtssSrpRegenOverrideEntry 2 }

ieee8021FqtssSrpBoundaryPort OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The value of the SRPdomainBoundaryPort parameter
    (35.1.4) for the priority. "
REFERENCE   "35.1.4, 6.9.4, 12.20.3"
 ::= { ieee8021FqtssSrpRegenOverrideEntry 3 }

-- =====
-- IEEE8021 FQTSS MIB - Conformance Information
-- =====

ieee8021FqtssCompliances
    OBJECT IDENTIFIER ::= { ieee8021FqtssConformance 1 }
ieee8021FqtssGroups
    OBJECT IDENTIFIER ::= { ieee8021FqtssConformance 2 }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
 IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
 Corrigendum 1: Technical and editorial corrections

```
-- =====
-- units of conformance
-- =====

-- =====
-- the ieee8021FqtssBap group
-- =====

ieee8021FqtssBapGroup OBJECT-GROUP
  OBJECTS {
    ieee8021FqtssDeltaBandwidth,
    ieee8021FqtssOperIdleSlopeMs,
    ieee8021FqtssOperIdleSlopeLs,
    ieee8021FqtssAdminIdleSlopeMs,
    ieee8021FqtssAdminIdleSlopeLs,
    ieee8021FqtssBapRowStatus
  }
  STATUS      current
  DESCRIPTION
    "Objects that define bandwidth allocation for FQTSS."
    ::= { ieee8021FqtssGroups 1 }

-- =====
-- the ieee8021FqtssTxSelectionAlgorithm group
-- =====

ieee8021FqtssTxSelectionAlgorithmGroup OBJECT-GROUP
  OBJECTS {
    ieee8021FqtssTxSelectionAlgorithmID
  }
  STATUS      current
  DESCRIPTION
    "Objects that define transmission selection
    mappings for FQTSS."
    ::= { ieee8021FqtssGroups 2 }

-- =====
-- the ieee8021FqtssBoundaryPort group
-- =====

ieee8021FqtssBoundaryPortGroup OBJECT-GROUP
  OBJECTS {
    ieee8021FqtssPriorityRegenOverride,
    ieee8021FqtssSrpBoundaryPort
  }
  STATUS      current
  DESCRIPTION
    "Objects that define boundary port priority override
    mappings for FQTSS."
    ::= { ieee8021FqtssGroups 3 }

-- =====
-- compliance statements
-- =====

ieee8021FqtssCompliance MODULE-COMPLIANCE
  STATUS      current
  DESCRIPTION
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

"The compliance statement for devices supporting forwarding and queuing for time sensitive streams.

Support of the objects defined in the IEEE8021-FQTSS MIB also requires support of the IEEE8021-BRIDGE-MIB; the provisions of 17.3.2 apply to implementations claiming support of the IEEE8021-FQTSS MIB. "

```
MODULE -- this module
  MANDATORY-GROUPS {
    ieee8021FqtssBapGroup,
    ieee8021FqtssTxSelectionAlgorithmGroup,
    ieee8021FqtssBoundaryPortGroup
  }

  ::= { ieee8021FqtssCompliances 1 }
```

END

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

17.7.14 Definitions for the IEEE8021-SRP-MIB module

Replace the text of 17.7.14 with the following:

```
IEEE8021-SRP-MIB DEFINITIONS ::= BEGIN

-- =====
-- MIB for support of 802.1Qat Stream Reservation Protocol
-- (SRP) in 802.1Q Bridges.
-- =====

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Counter64,
    Unsigned32
        FROM SNMPv2-SMI
    MacAddress,
    TEXTUAL-CONVENTION,
    TruthValue
        FROM SNMPv2-TC
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ieee802dot1mibs,
    IEEE8021PriorityCodePoint,
    IEEE8021VlanIndex
        FROM IEEE8021-TC-MIB
    IEEE8021FqtssTrafficClassValue
        FROM IEEE8021-FQTSS-MIB
    ieee8021BridgeBaseComponentId,
    ieee8021BridgeBaseEntry,
    ieee8021BridgeBasePort,
    ieee8021BridgeBasePortEntry
        FROM IEEE8021-BRIDGE-MIB
;

ieee8021SrpMib MODULE-IDENTITY
    LAST-UPDATED "201512020000Z" -- December 2, 2015
    ORGANIZATION "IEEE 802.1 Working Group"
    CONTACT-INFO
        "WG-URL: http://ieee802.org/1/
        WG-Email: STDS-802-1-L@LISTSERV.IEEE.ORG

        Contact: IEEE 802.1 Working Group Chair
        Postal: C/O IEEE 802.1 Working Group
                IEEE Standards Association
                445 Hoes Lane
                Piscataway
                NJ 08854
                USA
        E-mail: STDS-802-1-L@LISTSERV.IEEE.ORG"
    DESCRIPTION
        "The Bridge MIB module for managing devices that support
        the IEEE Std 802.1Q Stream Reservation Protocol.

        Unless otherwise indicated, the references in this MIB
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

module are to IEEE Std 802.1Q-2014.

Copyright (C) IEEE (2015).

This version of this MIB module is part of IEEE802.1Q;
see the draft itself for full legal notices."

REVISION "201512020000Z" -- December 2, 2015

DESCRIPTION

"Published as part of IEEE Std 802.1Q-2014 Cor-1.
ieee8021SrpReservationFailureBridgeId changed to
ieee8021SrpReservationFailureSystemId."

REVISION "201412150000Z" -- December 15, 2014

DESCRIPTION

"Published as part of IEEE Std 802.1Q 2014 revision.
Cross references updated and corrected."

REVISION "201102270000Z" -- February 27, 2011

DESCRIPTION

"Minor edits to contact information etc. as part of
2011 revision of Std 802.1Q."

REVISION "201004190000Z" -- April 19, 2010

DESCRIPTION

"Initial revision, included in IEEE 802.1Qat"
:= { ieee802dot1mibs 19 }

-- =====
-- Textual Conventions
-- =====

IEEE8021SrpStreamRankValue ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"An 802.1 SRP Stream Rank value. This is an integer,
with the following interpretation placed on the value:

0: Emergency, high-rank stream,
1: Non-emergency stream."

REFERENCE "35.2.2.8.5b"

SYNTAX INTEGER {
 emergency(0),
 nonEmergency(1)
}

IEEE8021SrpStreamIdValue ::= TEXTUAL-CONVENTION

DISPLAY-HINT "1x:1x:1x:1x:1x:1x:1x:1x"

STATUS current

DESCRIPTION

"Represents an SRP Stream ID, which is often defined
as a MAC Address followed by a unique 16-bit ID."

SYNTAX OCTET STRING (SIZE (8))

IEEE8021SrpReservationDirectionValue ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"An 802.1 SRP Stream Reservation Direction value. This is
an integer, with the following interpretation placed on

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

the value:

```

0: Talker registrations,
1: Listener registrations."
REFERENCE      "35.2.1.2"
SYNTAX         INTEGER {
                    talkerRegistrations(0),
                    listenerRegistrations(1)
                }

```

IEEE8021SrpReservationDeclarationTypeValue ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"An 802.1 SRP Stream Reservation Declaration Type value.
This is an integer, with the following interpretation
placed on the value:

```

0: Talker Advertise,
1: Talker Failed,
2: Listener Asking Failed,
3: Listener Ready,
4: Listener Ready Failed."
REFERENCE      "35.2.1.3"
SYNTAX         INTEGER {
                    talkerAdvertise(0),
                    talkerFailed(1),
                    listenerAskingFailed(2),
                    listenerReady(3),
                    listenerReadyFailed(4)
                }

```

IEEE8021SrpReservationFailureCodeValue ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

"An 802.1 SRP Stream Reservation Failure Code value.
This is an integer, with the following interpretation
placed on the value:

```

0: No failure,
1: Insufficient bandwidth,
2: Insufficient Bridge resources,
3: Insufficient bandwidth for Traffic Class,
4: StreamID in use by another Talker,
5: Stream destination address already in use,
6: Stream pre-empted by higher rank,
7: Reported latency has changed,
8: Egress port is not AVBCapable,
9: Use a different destination_address,
10: Out of MSRP resources,
11: Out of MMRP resources,
12: Cannot store destination_address,
13: Requested priority is not an SR Class priority,
14: MaxFrameSize is too large for media,
15: maxFanInPorts limit has been reached,
16: Changes in FirstValue for a registered StreamID,
17: VLAN is blocked on this egress port (Registration Forbidden),

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

18: VLAN tagging is disabled on this egress port (untagged set),
19: SR class priority mismatch."
REFERENCE      "35.2.2.8.7"
SYNTAX        INTEGER {
                    noFailure(0),
                    insufficientBandwidth(1),
                    insufficientResources(2),
                    insufficientTrafficClassBandwidth(3),
                    streamIDInUse(4),
                    streamDestinationAddressInUse(5),
                    streamPreemptedByHigherRank(6),
                    latencyHasChanged(7),
                    egressPortNotAVBCapable(8),
                    useDifferentDestinationAddress(9),
                    outOfMSRPResources(10),
                    outOfMMRPResources(11),
                    cannotStoreDestinationAddress(12),
                    priorityIsNoAnSRClass(13),
                    maxFrameSizeTooLarge(14),
                    maxFanInPortsLimitReached(15),
                    firstValueChangedForStreamID(16),
                    vlanBlockedOnEgress(17),
                    vlanTaggingDisabledOnEgress(18),
                    srClassPriorityMismatch(19)
                }

```

```

-- =====
-- subtrees in the SRP MIB
-- =====

ieee8021SrpNotifications
    OBJECT IDENTIFIER ::= { ieee8021SrpMib 0 }

ieee8021SrpObjects
    OBJECT IDENTIFIER ::= { ieee8021SrpMib 1 }

ieee8021SrpConformance
    OBJECT IDENTIFIER ::= { ieee8021SrpMib 2 }

ieee8021SrpConfiguration
    OBJECT IDENTIFIER ::= { ieee8021SrpObjects 1 }

ieee8021SrpLatency
    OBJECT IDENTIFIER ::= { ieee8021SrpObjects 2 }

ieee8021SrpStreams
    OBJECT IDENTIFIER ::= { ieee8021SrpObjects 3 }

ieee8021SrpReservations
    OBJECT IDENTIFIER ::= { ieee8021SrpObjects 4 }

-- =====
-- The ieee8021SrpConfiguration subtree
-- This subtree defines the objects necessary for the
-- operational management of SRP.
-- =====

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

ieee8021SrpBridgeBaseTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021SrpBridgeBaseEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table for SRP main control and status information.
        All writeable objects in this table must be persistent
        over power up restart/reboot. These objects augment
        the ieee8021BridgeBasePortTable."
    ::= { ieee8021SrpConfiguration 1 }

ieee8021SrpBridgeBaseEntry OBJECT-TYPE
    SYNTAX      Ieee8021SrpBridgeBaseEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "SRP control and status information for a Bridge."
    AUGMENTS { ieee8021BridgeBaseEntry }
    ::= { ieee8021SrpBridgeBaseTable 1 }

Ieee8021SrpBridgeBaseEntry ::=
    SEQUENCE {
        ieee8021SrpBridgeBaseMsrpEnabledStatus
            TruthValue,
        ieee8021SrpBridgeBaseMsrpTalkerPruning
            TruthValue,
        ieee8021SrpBridgeBaseMsrpMaxFanInPorts
            Unsigned32,
        ieee8021SrpBridgeBaseMsrpLatencyMaxFrameSize
            Unsigned32
    }

ieee8021SrpBridgeBaseMsrpEnabledStatus OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "The administrative status requested by management for
        MSRP. The value true(1) indicates that MSRP should
        be enabled on this device, in all VLANs, on all ports
        for which it has not been specifically disabled. When
        false(2), MSRP is disabled, in all VLANs and on all
        ports, and all MSRP frames will be forwarded
        transparently. This objects affects both Applicant and
        Registrar state machines. A transition from false(2)
        to true(1) will cause a reset of all MSRP state
        machines on all ports.

        This object may be modified while the corresponding
        instance of ieee8021BridgeBaseRowStatus is active(1).

        The value of this object MUST be retained across
        reinitializations of the management system."
    REFERENCE   "35.2.1.4d"
    DEFVAL      { true }
    ::= { ieee8021SrpBridgeBaseEntry 1 }

ieee8021SrpBridgeBaseMsrpTalkerPruning OBJECT-TYPE

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

SYNTAX TruthValue
MAX-ACCESS read-create
STATUS current

DESCRIPTION

"The value of the talkerPruning parameter which controls the propagation of Talker declarations. The value true(1) indicates that Talker attributes are only declared on ports that have the Stream destination_address registered in the MMRP MAC Address Registration Entries. When false(2), Talker attribute are declared on all egress ports in the active topology.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.22.1, 35.2.1.4b, 35.2.4.3.1"

DEFVAL { false }

::= { ieee8021SrpBridgeBaseEntry 2 }

ieee8021SrpBridgeBaseMsrpMaxFanInPorts OBJECT-TYPE

SYNTAX Unsigned32
MAX-ACCESS read-create
STATUS current

DESCRIPTION

"The value of the msrpMaxFanInPorts parameter which limits the total number of ports on a Bridge that are allowed to establish reservations for inbound Streams. A value of zero (0) indicates no fan-in limit is being specified and calculations involving fan-in will only be limited by the number of MSRP enabled ports.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.22.1, 35.2.1.4f"

DEFVAL { 0 }

::= { ieee8021SrpBridgeBaseEntry 3 }

ieee8021SrpBridgeBaseMsrpLatencyMaxFrameSize OBJECT-TYPE

SYNTAX Unsigned32
MAX-ACCESS read-create
STATUS current

DESCRIPTION

"The value of msrpLatencyMaxFrameSize parameter which is used in the calculation of the maximum latency through a Bridge. The maximum size is defined to be 2000 octets by default, but may be set to a smaller or larger value dependent on the particular Bridge configuration. This parameter does not imply any type of policing of frame size, it is only used in the latency calculations.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "12.22.1, 35.2.1.4g"

DEFVAL { 2000 }

::= { ieee8021SrpBridgeBaseEntry 4 }

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

ieee8021SrpBridgePortTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021SrpBridgePortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table for SRP control and status information about
        every Bridge Port. Augments the ieee8021BridgeBasePortTable."
    ::= { ieee8021SrpConfiguration 2 }

ieee8021SrpBridgePortEntry OBJECT-TYPE
    SYNTAX      Ieee8021SrpBridgePortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "SRP control and status information for a Bridge Port."
    AUGMENTS { ieee8021BridgeBasePortEntry }
    ::= { ieee8021SrpBridgePortTable 1 }

Ieee8021SrpBridgePortEntry ::=
    SEQUENCE {
        ieee8021SrpBridgePortMsrpEnabledStatus
            TruthValue,
        ieee8021SrpBridgePortMsrpFailedRegistrations
            Counter64,
        ieee8021SrpBridgePortMsrpLastPduOrigin
            MacAddress,
        ieee8021SrpBridgePortSrPvid
            IEEE8021VlanIndex
    }

ieee8021SrpBridgePortMsrpEnabledStatus OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "The administrative state of MSRP operation on this port. The
        value true(1) indicates that MSRP is enabled on this port
        in all VLANs as long as ieee8021BridgeMsrpEnabledStatus is
        also true(1). A value of false(2) indicates that MSRP is
        disabled on this port in all VLANs: any MSRP frames received
        will be silently discarded, and no MSRP registrations will be
        propagated from other ports. Setting this to a value of
        true(1) will be stored by the agent but will only take
        effect on the MSRP protocol operation if
        ieee8021BridgeMsrpEnabledStatus
        also indicates the value true(1). This object affects
        all MSRP Applicant and Registrar state machines on this
        port. A transition from false(2) to true(1) will
        cause a reset of all MSRP state machines on this port.

        The value of this object MUST be retained across
        reinitializations of the management system."
    REFERENCE   "35.2.1.4e"
    DEFVAL      { true }
    ::= { ieee8021SrpBridgePortEntry 1 }

ieee8021SrpBridgePortMsrpFailedRegistrations OBJECT-TYPE
    SYNTAX      Counter64

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

UNITS "failed MSRP registrations"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of failed MSRP registrations, for any reason, in all VLANs, on this port.

Discontinuities in the value of the counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime object of the associated interface (if any)."

REFERENCE "10.7.12.1"

::= { ieee8021SrpBridgePortEntry 2 }

ieee8021SrpBridgePortMsrpLastPduOrigin OBJECT-TYPE

SYNTAX MacAddress

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The Source MAC Address of the last MSRP message received on this port."

REFERENCE "10.7.12.2"

::= { ieee8021SrpBridgePortEntry 3 }

ieee8021SrpBridgePortSrPvid OBJECT-TYPE

SYNTAX IEEE8021VlanIndex

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"The default VLAN ID that Streams are assigned to. Talkers learn this VID from the SRP Domain attribute and tag Streams accordingly.

The value of this object MUST be retained across reinitializations of the management system."

REFERENCE "35.2.2.8.3b"

DEFVAL { 2 }

::= { ieee8021SrpBridgePortEntry 4 }

-- =====
-- The ieee8021SrpLatency subtree
-- This subtree defines the objects necessary for retrieving
-- the latency of the various traffic classes on a port.
-- =====

-- =====
-- the ieee8021SrpLatencyTable
-- =====

ieee8021SrpLatencyTable OBJECT-TYPE

SYNTAX SEQUENCE OF Ieee8021SrpLatencyEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table containing a set of latency measurement parameters for each traffic class."

REFERENCE "35.2.2.8.6"

::= { ieee8021SrpLatency 1 }

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

ieee8021SrpLatencyEntry OBJECT-TYPE
    SYNTAX      Ieee8021SrpLatencyEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A list of objects containing latency information
        for each traffic class. Rows in the table are
        automatically created for ports that are not an
        SRP domain boundary port (i.e. SRPdomainBoundaryPort
        is FALSE). See 35.1.4, 8.8.2, 12.22.3."
    INDEX { ieee8021BridgeBaseComponentId,
            ieee8021BridgeBasePort,
            ieee8021SrpTrafficClass }
    ::= { ieee8021SrpLatencyTable 1 }

Ieee8021SrpLatencyEntry ::=
    SEQUENCE {
        ieee8021SrpTrafficClass
            IEEE8021FqtssTrafficClassValue,
        ieee8021SrpPortTcLatency
            Unsigned32
    }

ieee8021SrpTrafficClass OBJECT-TYPE
    SYNTAX      IEEE8021FqtssTrafficClassValue
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The traffic class number associated with the
        row of the table.

        Rows in the table are automatically created for
        ports that are not an SRP domain boundary port
        (i.e. SRPdomainBoundaryPort is FALSE)."
```

REFERENCE "35.1.4, 8.8.2, 12.22.3"

```

    ::= { ieee8021SrpLatencyEntry 1 }

ieee8021SrpPortTcLatency OBJECT-TYPE
    SYNTAX      Unsigned32
    UNITS       "nano-seconds"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The value of the portTcMaxLatency parameter for the
        traffic class. This value is expressed in
        nano-seconds."
    REFERENCE  "35.2.1.4, 35.2.2.8.6"
    ::= { ieee8021SrpLatencyEntry 2 }

-- =====
-- The ieee8021SrpStreams subtree
-- This subtree defines the objects necessary for retrieving
-- the characteristics of the various Streams currently registered.
-- =====
-- =====

```

```
-- the ieee8021SrpStreamTable
-- =====
ieee8021SrpStreamTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021SrpStreamEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table containing a set of characteristics
        for each registered Stream."
    REFERENCE   "35.2.2.8"
    ::= { ieee8021SrpStreams 1 }

ieee8021SrpStreamEntry OBJECT-TYPE
    SYNTAX      Ieee8021SrpStreamEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A list of objects containing characteristics
        for each registered Stream. Rows in the table are
        automatically created for Streams registered on any
        port of a Bridge."
    INDEX       { ieee8021SrpStreamId }
    ::= { ieee8021SrpStreamTable 1 }

Ieee8021SrpStreamEntry ::=
    SEQUENCE {
        ieee8021SrpStreamId
            IEEE8021SrpStreamIdValue,
        ieee8021SrpStreamDestinationAddress
            MacAddress,
        ieee8021SrpStreamVlanId
            IEEE8021VlanIndex,
        ieee8021SrpStreamTspecMaxFrameSize
            Unsigned32,
        ieee8021SrpStreamTspecMaxIntervalFrames
            Unsigned32,
        ieee8021SrpStreamDataFramePriority
            IEEE8021PriorityCodePoint,
        ieee8021SrpStreamRank
            IEEE8021SrpStreamRankValue
    }

ieee8021SrpStreamId OBJECT-TYPE
    SYNTAX      IEEE8021SrpStreamIdValue
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The Stream ID associated with the row of the table.

        Rows in the table are automatically created when
        Streams are registered via MSRP."
    REFERENCE   "35.2.2.8.2"
    ::= { ieee8021SrpStreamEntry 1 }

ieee8021SrpStreamDestinationAddress OBJECT-TYPE
    SYNTAX      MacAddress
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

"The MAC destination address for the Stream described
by this reservation."
REFERENCE "35.2.2.8.3a"
::= { ieee8021SrpStreamEntry 2}

ieee8021SrpStreamVlanId OBJECT-TYPE
SYNTAX IEEE8021VlanIndex
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The VLAN ID associated with the MSRP registration
for this Stream."
REFERENCE "35.2.2.8.3b"
::= { ieee8021SrpStreamEntry 3}

ieee8021SrpStreamTspecMaxFrameSize OBJECT-TYPE
SYNTAX Unsigned32 (0..65535)
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The maximum size frame that will be sent by
a Talker for this Stream. This value is part
of the Traffic Specification for the Stream."
REFERENCE "35.2.2.8.4a"
::= { ieee8021SrpStreamEntry 4}

ieee8021SrpStreamTspecMaxIntervalFrames OBJECT-TYPE
SYNTAX Unsigned32 (0..65535)
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The maximum number of frame that will be sent
during a class measurement interval (L.2). This
value is part of the Traffic Specification for
the Stream."
REFERENCE "35.2.2.8.4b, L.2"
::= { ieee8021SrpStreamEntry 5}

ieee8021SrpStreamDataFramePriority OBJECT-TYPE
SYNTAX IEEE8021PriorityCodePoint
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The Priority Code Point (PCP) value that the
referenced Stream will be tagged with. This value
is used to distinguish Class A and Class B traffic."
REFERENCE "35.2.2.8.5a"
::= { ieee8021SrpStreamEntry 6}

ieee8021SrpStreamRank OBJECT-TYPE
SYNTAX IEEE8021SrpStreamRankValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"SRP supports emergency and non-emergency.
Emergency traffic will interrupt non-emergency
traffic if there is insufficient bandwidth or
resources available for the emergency traffic."

REFERENCE "35.2.2.8.5b"

::= { ieee8021SrpStreamEntry 7 }

```
-- =====
-- The ieee8021SrpReservations subtree
-- This subtree defines the objects necessary for retrieving
-- the Stream attribute registrations on each port of a Bridge.
-- =====
```

```
-- =====
-- the ieee8021SrpReservationsTable
-- =====
```

```
ieee8021SrpReservationsTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Ieee8021SrpReservationsEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table containing Stream attribute
        registrations per port."
    REFERENCE   "35.2.4"
    ::= { ieee8021SrpReservations 1 }
```

```
ieee8021SrpReservationsEntry OBJECT-TYPE
    SYNTAX      Ieee8021SrpReservationsEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A list of objects containing Stream attribute
        registrations per port. Rows in the table are
        automatically created for Streams registered on any
        port of a Bridge."
    INDEX { ieee8021SrpReservationStreamId,
            ieee8021SrpReservationDirection,
            ieee8021BridgeBaseComponentId,
            ieee8021BridgeBasePort }
    ::= { ieee8021SrpReservationsTable 1 }
```

```
Ieee8021SrpReservationsEntry ::=
    SEQUENCE {
        ieee8021SrpReservationStreamId
            IEEE8021SrpStreamIdValue,
        ieee8021SrpReservationDirection
            IEEE8021SrpReservationDirectionValue,
        ieee8021SrpReservationDeclarationType
            IEEE8021SrpReservationDeclarationTypeValue,
        ieee8021SrpReservationAccumulatedLatency
            Unsigned32,
        ieee8021SrpReservationFailureSystemId
            OCTET STRING,
        ieee8021SrpReservationFailureCode
            IEEE8021SrpReservationFailureCodeValue,
        ieee8021SrpReservationDroppedStreamFrames
            Counter64,
        ieee8021SrpReservationStreamAge
            Unsigned32
    }
```

```
ieee8021SrpReservationStreamId OBJECT-TYPE
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

SYNTAX IEEE8021SrpStreamIdValue
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"The Stream ID associated with the row of the table.

Rows in the table are automatically created when
Streams are registered via MSRP."
REFERENCE "35.2.2.8.2"
::= { ieee8021SrpReservationsEntry 1 }

ieee8021SrpReservationDirection OBJECT-TYPE
SYNTAX IEEE8021SrpReservationDirectionValue
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
"The source of this Stream registration, either
Talker or Listener."
REFERENCE "35.2.1.2"
::= { ieee8021SrpReservationsEntry 2 }

ieee8021SrpReservationDeclarationType OBJECT-TYPE
SYNTAX IEEE8021SrpReservationDeclarationTypeValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The type of Talker or Listener registration."
REFERENCE "35.2.1.3"
::= { ieee8021SrpReservationsEntry 3 }

ieee8021SrpReservationAccumulatedLatency OBJECT-TYPE
SYNTAX Unsigned32
UNITS "nano-seconds"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The Accumulated Latency associated with the current
registration.

For Talker registrations this represents the accumulated
latency from the Talker to the ingress port of this
Bridge.

For Listener registrations this represents the accumulated
latency to the ingress port of the neighbor Bridge or
end stations. This include the latency of the media
attached to this egress port."
REFERENCE "35.2.2.8.6"
::= { ieee8021SrpReservationsEntry 4 }

ieee8021SrpReservationFailureSystemId OBJECT-TYPE
SYNTAX OCTET STRING(SIZE(8))
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The first system that changes a Talker Advertise to a
Talker Failed registration will report its System
Identification in this field. That single System

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

Identification is then propagated from system to system."

REFERENCE "35.2.2.8.7a"
::= { ieee8021SrpReservationsEntry 5 }

ieee8021SrpReservationFailureCode OBJECT-TYPE

SYNTAX IEEE8021SrpReservationFailureCodeValue
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"The first Bridge that changes a Talker Advertise to a Talker Failed registration will report the Failure Code in this field. That single Failure Code is then propagated from Bridge to Bridge."

REFERENCE "35.2.2.8.7b"
::= { ieee8021SrpReservationsEntry 6 }

ieee8021SrpReservationDroppedStreamFrames OBJECT-TYPE

SYNTAX Counter64
UNITS "frames"
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"A count of the number of data stream frames that have been dropped for whatever reason. These are not MSRP frames, but the stream data frames that are carried by the MSRP Reservation.

Discontinuities in the value of the counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime object of the associated interface (if any)."

REFERENCE "35.2.5.1"
::= { ieee8021SrpReservationsEntry 7 }

ieee8021SrpReservationStreamAge OBJECT-TYPE

SYNTAX Unsigned32
UNITS "seconds"
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"The number of seconds since the reservation was established on this port."

REFERENCE "35.2.1.4c"
::= { ieee8021SrpReservationsEntry 8 }

-- =====
-- IEEE8021 SRP MIB - Conformance Information
-- =====

ieee8021SrpCompliances

OBJECT IDENTIFIER ::= { ieee8021SrpConformance 1 }

ieee8021SrpGroups

OBJECT IDENTIFIER ::= { ieee8021SrpConformance 2 }

-- =====
-- units of conformance
-- =====

IEEE Std 802.1Q™-2014/Cor 1-2015
 IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
 Corrigendum 1: Technical and editorial corrections

```
-- =====
-- the ieee8021SrpConfiguration group
-- =====

ieee8021SrpConfigurationGroup OBJECT-GROUP
  OBJECTS {
    ieee8021SrpBridgeBaseMsrpEnabledStatus,
    ieee8021SrpBridgeBaseMsrpTalkerPruning,
    ieee8021SrpBridgeBaseMsrpMaxFanInPorts,
    ieee8021SrpBridgeBaseMsrpLatencyMaxFrameSize,
    ieee8021SrpBridgePortMsrpEnabledStatus,
    ieee8021SrpBridgePortMsrpFailedRegistrations,
    ieee8021SrpBridgePortMsrpLastPduOrigin,
    ieee8021SrpBridgePortSrPvid
  }
  STATUS      current
  DESCRIPTION
    "Objects that define configuration of SRP."
    ::= { ieee8021SrpGroups 1 }

-- =====
-- the ieee8021SrpLatency group
-- =====

ieee8021SrpLatencyGroup OBJECT-GROUP
  OBJECTS {
    ieee8021SrpPortTcLatency
  }
  STATUS      current
  DESCRIPTION
    "Objects that define latency for SRP."
    ::= { ieee8021SrpGroups 2 }

-- =====
-- the ieee8021SrpStreams group
-- =====

ieee8021SrpStreamsGroup OBJECT-GROUP
  OBJECTS {
    -- ieee8021SrpStreamId,
    ieee8021SrpStreamDestinationAddress,
    ieee8021SrpStreamVlanId,
    ieee8021SrpStreamTspecMaxFrameSize,
    ieee8021SrpStreamTspecMaxIntervalFrames,
    ieee8021SrpStreamDataFramePriority,
    ieee8021SrpStreamRank
  }
  STATUS      current
  DESCRIPTION
    "Objects that define Streams for SRP."
    ::= { ieee8021SrpGroups 3 }

-- =====
-- the ieee8021SrpReservations group
-- =====

ieee8021SrpReservationsGroup OBJECT-GROUP
  OBJECTS {
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```
-- ieee8021SrpReservationStreamId,
-- ieee8021SrpReservationDirection,
ieee8021SrpReservationDeclarationType,
ieee8021SrpReservationAccumulatedLatency,
ieee8021SrpReservationFailureSystemId,
ieee8021SrpReservationFailureCode,
ieee8021SrpReservationDroppedStreamFrames,
ieee8021SrpReservationStreamAge
}
STATUS          current
DESCRIPTION
    "Objects that define Stream Reservations for SRP."
::= { ieee8021SrpGroups 4 }

-- =====
-- compliance statements
-- =====

ieee8021SrpCompliance MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "The compliance statement for devices supporting
        Stream Reservation Protocol.

        Support of the objects defined in the IEEE8021-SRP MIB
        also requires support of the IEEE8021-BRIDGE-MIB; the
        provisions of 17.3.2 apply to implementations claiming
        support of the IEEE8021-SRP MIB."

    MODULE -- this module
        MANDATORY-GROUPS {
            ieee8021SrpConfigurationGroup,
            ieee8021SrpLatencyGroup,
            ieee8021SrpStreamsGroup,
            ieee8021SrpReservationsGroup
        }

    ::= { ieee8021SrpCompliances 1 }

END
```

25. Support of the MAC Service by PBBNs

25.2 Customer service interface

Change the paragraph immediately before the NOTE as follows:

In all cases, segregation of different service instances is achieved at an interface wholly under the control of the backbone provider, and by verification of customer provided parameters that provide service instance selection. Stronger authentication and authorization of the attached customer systems ~~may~~can be achieved by use of IEEE Std 802.1X.

32. Congestion notification protocol

32.14 RP procedures

32.14.4 ReceiveCnm

Change list item e) as follows:

- e) If the selected RP rate control state machine's rpEnabled variable is FALSE and is not held FALSE because rpgEnable (32.11.1) has the value FALSE, and the CNM's cnmQOffset field (33.4.5) is ~~negative~~ positive, then rpEnabled is reset to TRUE, the variable rpppCreatedRps (32.10.2) is incremented.

33. Encoding of congestion notification PDUs

33.4 Congestion Notification Message PDU format

33.4.5 cnmQOffset

Change the first line as follows:

The two's-complement signed integer value of ~~the transmitting CP's $(-1 \times \text{cpQOffset})$~~ (32.8.7) of the transmitting CP in units of 64 octets.

35. Stream Reservation Protocol (SRP)

35.1 Multiple Stream Registration Protocol (MSRP)

35.1.2 Behavior of end stations

35.1.2.1 Talkers

Insert the following paragraph immediately following list item b):

A Talker Advertise shall not be declared if there are not sufficient bandwidth and resources available. If a Talker Advertise is being declared and the required bandwidth or resources become unavailable the Talker Advertise shall be withdrawn and a Talker Failed may be declared. A Talker is allowed to transition directly from a Talker Advertise to a Talker Failed without waiting for the Talker Advertise to be deregistered from the network (see 35.2.6).

35.2 Definition of the MSRP application

35.2.2 Definition of MRP elements

35.2.2.8 MSRP FirstValue definitions (stream reservations)

35.2.2.8.1 Structure definition

Change Figure 35-2 as follows:

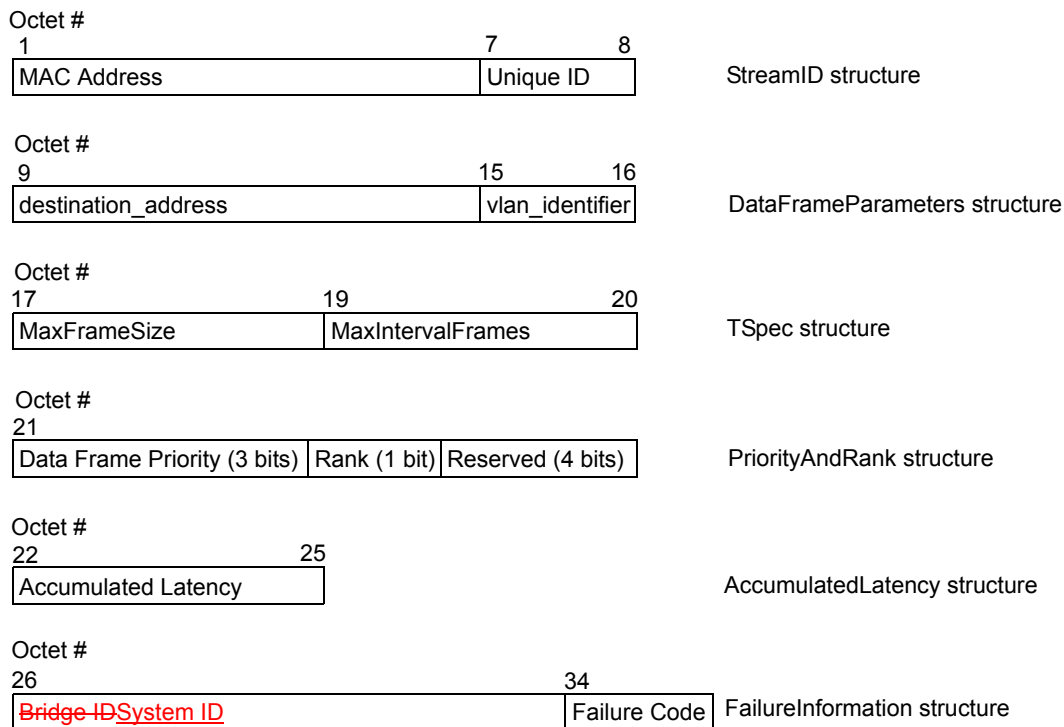


Figure 35-2—Format of the components of the reservation FirstValue fields

35.2.2.8.7 FailureInformation

Change the text of 35.2.2.8.7 and Table 35-6, and insert a NOTE, as follows:

At the point when a Talker Advertise Declaration is transformed into a Talker Failed Declaration, the ~~Bridge system~~ making the transformation adds information that indicates, to the Listeners registering the Talker Failed Declaration, the cause of the failure, and the identity of the ~~Bridge system~~ at which the failure occurred. The subcomponents of the FailureInformation include

- ~~The system identifier, which is the~~ The Bridge ~~ID-Identifier~~ (13.26.2) of the Bridge, ~~or the 48-bit MAC Address of the end station's port extended to 64-bits by prepending 16 bits of zero,~~ that changed the Declaration Type from Advertise to Failed.
- The Reservation Failure Code, which is represented by a single octet containing the value shown in Table 35-6.

NOTE—Bridge Identifiers are normally constructed from MAC Addresses that are unique in the bridged LAN but are not required to be constructed in that manner; therefore, there is a possibility of an end station MAC Address colliding with the Bridge ID.

Table 35-6—Reservation Failure Codes

Failure Code	Description of cause
1	Insufficient bandwidth
2	Insufficient Bridgesystem resources
3	Insufficient bandwidth for traffic class.
4	StreamID in use by another Talker
5	Stream destination_address already in use
6	Stream preempted by higher rank
7	Reported latency has changed
8	Egress port is not AVB capable ^a
9	Use a different destination_address (i.e., MAC DA hash table full)
10	Out of MSRP resources
11	Out of MMRP resources
12	Cannot store destination_address (i.e., Bridgesystem is out of MAC DA resources)
13	Requested priority is not an SR Class (3.231) priority
14	MaxFrameSize (35.2.2.8.4(a)) is too large for media
15	msrpMaxFanInPorts (35.2.1.4(f)) limit has been reached
16	Changes in FirstValue for a registered StreamID.
17	VLAN is blocked on this egress port (Registration Forbidden) ^b
18	VLAN tagging is disabled on this egress port (untagged set)
19	SR class priority mismatch

^aA device could choose to use the asCapable variable from IEEE Std 802.1AS™-2011 [B7], 10.2.4.1, to help determine if its neighboring device is AVB capable. If the asCapable variable is FALSE for a particular port, then the neighboring device is not a time-aware system and therefore not AVB capable.

^bThis Failure Code is never declared in a Talker Failed message since Talker attributes are not propagated on egress ports that have the associated VLAN blocked. The **Bridgesystem** can still be queried by other means to learn why the Talker attribute was not declared.

Annex A

(normative)

PICS proforma—Bridge implementations²

A.37 Shortest Path Bridging (SPB)

Change row SPB-2 as follows:

SPB-2	Encode, decode, and validate IS-IS Hello PDUs or SPT BPDUs for the Agreement Protocol (AP) and support Agreement Protocol AP logic in IS-IS?	SPB:M	5.4.5, 28	Yes []	No []
-------	---	-------	-----------	---------	--------

²Copyright release for PICS proformas: Users of this standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Annex B

(normative)

PICS proforma—End station implementations

B.10 Stream Reservation Protocol (SRP)

Change rows SRP-11 and SRP-12 as follows:

SRP-11	Does the implementation update the Failure Information Bridge ID <u>End station MAC address</u> and Code in the event of insufficient bandwidth or resources through a Bridge <u>when a Talker Failed is declared</u> ?	M	35.2.2.8.7	Yes []	
SRP-12	Does the implementation create a Talker Failed in the event of insufficient bandwidth or resources through a Bridge ?	M <u>O</u>	35.2.4.3, 35.40 <u>35.1.2.1</u>	Yes []	No []

Annex D

(normative)

IEEE 802.1 Organizationally Specific TLVs

D.1 Requirements of the IEEE 802.1 Organizationally Specific TLV sets

Change row 07 of Table D-1 as follows:

Table D-1— IEEE 802.1 Organizationally Specific TLVs ~~specified in this standard~~

IEEE 802.1 subtype	TLV name	TLV set name	TLV reference	Feature clause reference
07	Link Aggregation	basicSet	D.2.7 Annex F of IEEE Std 802.1AX-2014	D.2.7, Annex F of IEEE Std 802.1AX-20082014

D.2 Organizationally Specific TLV definitions

D.2.7 Link Aggregation TLV

Delete D2.7, D2.7.1, D2.7.2, D2.7.3, and Table D-3, re-numbering subsequent tables and sub-clauses accordingly.

D.3 IEEE 802.1 Organizationally Specific TLV management

D.3.2 IEEE 802.1 managed objects—TLV variables

D.3.2.7 Link Aggregation TLV managed objects

Change the text as follows:

- aggregation status:** The capability and current aggregation status of the link (see ~~D.2.7.1~~Annex F of IEEE Std 802.1AX-2014).
- aggregated port ID:** The aggregated port identifier (see ~~D.2.7.2~~Annex F of IEEE Std 802.1AX-2014).

D.4 PICS proforma for IEEE 802.1 Organizationally Specific TLV extensions

D.4.3 Major capabilities and options

Change the following rows of the table, as follows:

dot1basictlv	Is each TLV in the IEEE 802.1 Organizationally Specific TLV basicSet implemented? Port VLAN ID TLV Port And Protocol VLAN ID TLV VLAN Name TLV Protocol Identity TLV VID Usage Digest TLV Management VID TLV Link Aggregation TLV	dot1basicSet:M dot1basicSet:M dot1basicSet:M dot1basicSet:M dot1basicSet:M dot1basicSet:M dot1basicSet:M	D.2.1 D.2.2 D.2.3 D.2.4 D.2.5 D.2.6 D-2.7 Annex F of IEEE Std 802.1AX-2014	Yes [] Yes [] Yes [] Yes [] Yes [] Yes [] Yes []
dot1cntlv	Is each TLV in the IEEE 802.1 Organizationally Specific TLV lagSet implemented? Link Aggregation TLV	dot1cnSet:M	D-2.7 Annex F of IEEE Std 802.1AX-2014	Yes []
equivstor	If the SNMP is not supported, is the provided storage and retrieval capability functionally equivalent with the indicated specifications of this clause for the operating mode being implemented?	M	D.2.1, D.2.2, D.2.3, D.2.4, and D-2.7 Annex F of IEEE Std 802.1AX-2014	Yes []

IEEE Std 802.1Q™-2014/Cor 1-2015
 IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
 Corrigendum 1: Technical and editorial corrections

D.5 IEEE 802.1/LLDP extension MIB

D.5.2 Structure of the IEEE 802.1/LLDP extension MIB

Change the following rows of Table D-12 (previously Table D-13) as follows:

Table D-12—IEEE 802.1/LLDP extension MIB object cross reference

MIB table	MIB object	LLDP reference
lldpV2Xdot1LocLinkAggTable		D.2.7 Annex F of IEEE Std 802.1AX-2014
	lldpV2LocPortIfIndex	(Table index)
	lldpV2Xdot1LocLinkAggStatus	aggregation status, D.2.7.1 Annex F of IEEE Std 802.1AX-2014
	lldpV2Xdot1LocLinkAggPortId	aggregation port ID, D.2.7.2 Annex F of IEEE Std 802.1AX-2014
lldpV2Xdot1RemLinkAggTable		D.2.7 Annex F of IEEE Std 802.1AX-2014
	lldpV2RemTimeMark	(Table index)
	lldpV2RemLocalIfIndex	(Table index)
	lldpV2RemLocalDestMACAddress	(Table index)
	lldpV2RemIndex	(Table index)
	lldpV2Xdot1RemLinkAggStatus	aggregation status, D.2.7.1 Annex F of IEEE Std 802.1AX-2014
	lldpV2Xdot1RemLinkAggPortId	aggregation port ID, D.2.7.2 Annex F of IEEE Std 802.1AX-2014

D.5.5 IEEE 802.1 LLDP extension MIB module—version 2

Replace the text of D.5.5 with the following:

In the following MIB definition, should any discrepancy between the DESCRIPTION text and the corresponding definition in D.2.1 through D.5 occur, the definition in D.2.1 through D.5 shall take precedence.

```
LLDP-EXT-DOT1-V2-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Unsigned32
        FROM SNMPv2-SMI
    TruthValue,
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC
    SnmpAdminString
        FROM SNMP-FRAMEWORK-MIB
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ifGeneralInformationGroup
        FROM IF-MIB
    lldpV2Extensions,
    lldpV2LocPortIfIndex,
    lldpV2RemTimeMark,
    lldpV2RemLocalIfIndex,
    lldpV2RemLocalDestMACAddress,
    lldpV2RemIndex,
    lldpV2PortConfigEntry
        FROM LLDP-V2-MIB
    VlanId
        FROM Q-BRIDGE-MIB
    IEEE8021PriorityValue
        FROM IEEE8021-TC-MIB;

lldpV2Xdot1MIB MODULE-IDENTITY
    LAST-UPDATED "201512020000Z" -- December 2, 2015
    ORGANIZATION "IEEE 802.1 Working Group"
    CONTACT-INFO
        "WG-URL: http://grouper.ieee.org/groups/802/1/index.html
        WG-EMail: STDS-802-1-L@LISTSERV.IEEE.ORG

        Contact: IEEE 802.1 Working Group Chair
        Postal: C/O IEEE 802.1 Working Group
                IEEE Standards Association
                445 Hoes Lane
                Piscataway
                NJ 08854
                USA
        E-mail: STDS-802-1-L@LISTSERV.IEEE.ORG"
    DESCRIPTION
        "The LLDP Management Information Base extension module for
        IEEE 802.1 organizationally defined discovery information.

        In order to ensure the uniqueness of the LLDP-V2-MIB,
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

lldpV2Xdot1MIB is branched from lldpV2Extensions using an Organizationally Unique Identifier (OUI) value as the node. An OUI is a 24 bit globally unique number assigned by the IEEE Registration Authority - see:

<http://standards.ieee.org/develop/regauth/oui/index.html>

Unless otherwise indicated, the references in this MIB module are to IEEE Std 802.1Q-2014.

Copyright (C) IEEE (2014). This version of this MIB module is published as D.5.5 of IEEE Std 802.1Q; see the standard itself for full legal notices."

REVISION "201512020000Z" -- December 2, 2015

DESCRIPTION

"Published as part of IEEE Std 802.1Q 2014 Cor-1.
Updated as a result of maintenance items #0132 and #0152"

REVISION "201412150000Z" -- December 15, 2014

DESCRIPTION

"Published as part of IEEE Std 802.1Q 2014 revision.
Cross references updated and corrected.
New tables lldpV2Xdot1RemVidUsageDigestV2Table and lldpV2Xdot1RemManVidV2Table inserted; old versions deprecated. New versions add an index for lldpV2RemIndex. "

REVISION "201103250000Z" -- March 25, 2011

DESCRIPTION

"Published as part of IEEE Std 802.1Qaz-2011. Adds the DCBX objects to the MIB module"

REVISION "201103230000Z" -- March 23, 2011

DESCRIPTION

"Published as part of IEEE Std 802.1Q-2011 revision.
This revision contains changes associated with relocating the extension MIB from IEEE Std 802.1AB to IEEE Std 802.1Q, minor tweaks to the text of the DESCRIPTION statement above to fix references to IEEE Std 802.1Q, updating of references to refer to Annex D, and addition of object definitions for Congestion Notification TLVs and corresponding compliance statements."

REVISION "200906080000Z" -- June 08, 2009

DESCRIPTION

"Published as part of IEEE Std 802.1AB-2009 revision.
This revision incorporated changes to the MIB to support the use of LLDP with multiple destination MAC addresses, and to import the Link Aggregation TLV from the 802.3 extension MIB"

-- OUI for IEEE 802.1 is 32962 (00-80-C2)

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

 ::= { lldpV2Extensions 32962 }

-----
-----
--
-- Organizational Defined Information Extension - IEEE 802.1
-- Definitions to support the basicSet TLV set (Table D-1)
--
-----
-----

lldpV2Xdot1Objects      OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 1 }

-- LLDP IEEE 802.1 extension MIB groups
lldpV2Xdot1Config      OBJECT IDENTIFIER ::= { lldpV2Xdot1Objects 1 }
lldpV2Xdot1LocalData   OBJECT IDENTIFIER ::= { lldpV2Xdot1Objects 2 }
lldpV2Xdot1RemoteData  OBJECT IDENTIFIER ::= { lldpV2Xdot1Objects 3 }

-----
-- Textual Convention definitions
-----

LldpV2XLinkAggStatusMap ::= TEXTUAL-CONVENTION
    STATUS      current
    DESCRIPTION
        "This TC describes the link aggregation status.

        The bit 'aggCapable(0)' indicates the link is capable of being
        aggregated if 1, not capable if 0.

        The bit 'aggEnabled(1)' indicates the link is currently in
        an aggregation if 1, not in an aggregation if 0.

        The bits 'portTypeLS(1)' and portTypeMS(2)' form the LS
        and MS bits of a Port Type value respectively:
        00 = no port type specified
        01 = transmitted from Aggregation Port
        10 = transmitted from Aggregator
        11 = transmitted from an Aggregator with a single
            Aggregation Port.

        The remaining bits are reserved for future standardization."
    SYNTAX      BITS {
        aggCapable(0),
        aggEnabled(1),
        portTypeLS(2),
        portTypeMS(3)
    }

-----
-- IEEE 802.1 - Configuration for the basicSet TLV set
-----
--
--
-- lldpV2Xdot1ConfigPortVlanTable : configure the transmission of the
--                               Port VLAN-ID TLVs on set of ports.
--
--
lldpV2Xdot1ConfigPortVlanTable OBJECT-TYPE

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

SYNTAX      SEQUENCE OF LldpV2Xdot1ConfigPortVlanEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "A table that controls selection of LLDP Port VLAN-ID TLVs
    to be transmitted on individual ports."
 ::= { lldpV2Xdot1Config 1 }

lldpV2Xdot1ConfigPortVlanEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1ConfigPortVlanEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "LLDP configuration information that controls the
    transmission of IEEE 802.1 organizationally defined Port
    VLAN-ID TLV on LLDP transmission capable ports.

    This configuration object augments the
    lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only
    present along with the port configuration defined by the
    associated lldpV2PortConfigEntry entry.

    Each active lldpConfigEntry is restored from non-volatile
    storage (along with the corresponding
    lldpV2PortConfigEntry) after a re-initialization of the
    management system."
AUGMENTS { lldpV2PortConfigEntry }
 ::= { lldpV2Xdot1ConfigPortVlanTable 1 }

lldpV2Xdot1ConfigPortVlanEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigPortVlanTxEnable TruthValue
}

lldpV2Xdot1ConfigPortVlanTxEnable OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "The lldpV2Xdot1ConfigPortVlanTxEnable, which is defined
    as a truth value and configured by the network management,
    determines whether the IEEE 802.1 organizationally defined
    port VLAN TLV transmission is allowed on a given LLDP
    transmission capable port.

    The value of this object is restored from non-volatile
    storage after a re-initialization of the management system."
REFERENCE
    "9.1.2.1 of IEEE Std 802.1AB"
DEFVAL { false }
 ::= { lldpV2Xdot1ConfigPortVlanEntry 1 }

--
-- lldpV2Xdot1ConfigVlanNameTable : configure the transmission of the
--                                VLAN name instances on set of ports.
--

lldpV2Xdot1ConfigVlanNameTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1ConfigVlanNameEntry

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

MAX-ACCESS    not-accessible
STATUS        current
DESCRIPTION
    "The table that controls selection of LLDP VLAN name TLV
    instances to be transmitted on individual ports."
::= { lldpV2Xdot1Config 2 }

lldpV2Xdot1ConfigVlanNameEntry OBJECT-TYPE
SYNTAX        LldpV2Xdot1ConfigVlanNameEntry
MAX-ACCESS    not-accessible
STATUS        current
DESCRIPTION
    "LLDP configuration information that specifies the set of
    ports (represented as a PortList) on which the Local System
    VLAN name instance is transmitted.

    This configuration object augments the lldpV2LocVlanEntry,
    therefore it is only present along with the VLAN Name
    instance contained in the associated lldpV2LocVlanNameEntry
    entry.

    Each active lldpV2Xdot1ConfigVlanNameEntry is restored
    from non-volatile storage (along with the corresponding
    lldpV2Xdot1LocVlanNameEntry) after a re-initialization of
    the management system."
AUGMENTS { lldpV2Xdot1LocVlanNameEntry }
::= { lldpV2Xdot1ConfigVlanNameTable 1 }

LldpV2Xdot1ConfigVlanNameEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigVlanNameTxEnable  TruthValue
}

lldpV2Xdot1ConfigVlanNameTxEnable OBJECT-TYPE
SYNTAX        TruthValue
MAX-ACCESS    read-write
STATUS        current
DESCRIPTION
    "The boolean value that indicates whether the corresponding
    Local System VLAN name instance is transmitted on the
    port defined by the given lldpV2Xdot1LocVlanNameEntry.

    The value of this object is restored from non-volatile
    storage after a re-initialization of the management
    system."
REFERENCE
    "9.1.2.1 of IEEE Std 802.1AB"
DEFVAL { false }
::= { lldpV2Xdot1ConfigVlanNameEntry 1 }

--
-- lldpV2Xdot1ConfigProtoVlanTable : configure the transmission of the
--                                protocol VLAN instances on set
--                                of ports.
--

lldpV2Xdot1ConfigProtoVlanTable OBJECT-TYPE

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

SYNTAX SEQUENCE OF LldpV2Xdot1ConfigProtoVlanEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION

"The table that controls selection of LLDP Port And Protocol VLAN ID TLV instances to be transmitted on individual ports."

::= { lldpV2Xdot1Config 3 }

lldpV2Xdot1ConfigProtoVlanEntry OBJECT-TYPE

SYNTAX LldpV2Xdot1ConfigProtoVlanEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION

"LLDP configuration information that specifies the set of ports (represented as a PortList) on which the Local System Protocol VLAN instance is transmitted.

This configuration object augments the lldpV2Xdot1LocVlanEntry, therefore it is only present along with the Port and Protocol VLAN ID instance contained in the associated lldpV2Xdot1LocVlanEntry entry.

Each active lldpV2Xdot1ConfigProtoVlanEntry is restored from non-volatile storage (along with the corresponding lldpV2Xdot1LocProtoVlanEntry) after a re-initialization of the management system."

AUGMENTS { lldpV2Xdot1LocProtoVlanEntry }
::= { lldpV2Xdot1ConfigProtoVlanTable 1 }

LldpV2Xdot1ConfigProtoVlanEntry ::= SEQUENCE {
 lldpV2Xdot1ConfigProtoVlanTxEnable TruthValue
}

lldpV2Xdot1ConfigProtoVlanTxEnable OBJECT-TYPE

SYNTAX TruthValue
MAX-ACCESS read-write
STATUS current
DESCRIPTION

"The boolean value that indicates whether the corresponding Local System Port and Protocol VLAN instance is transmitted on the port defined by the given lldpV2Xdot1LocProtoVlanEntry.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"9.1.2.1 of IEEE Std 802.1AB"

DEFVAL { false }
::= { lldpV2Xdot1ConfigProtoVlanEntry 1 }

--
-- lldpV2Xdot1ConfigProtocolTable : configure the transmission of the
-- protocol instances on set
-- of ports.
--

```

lldpV2Xdot1ConfigProtocolTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1ConfigProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The table that controls selection of LLDP Protocol
        TLV instances to be transmitted on individual ports."
    ::= { lldpV2Xdot1Config 4 }

lldpV2Xdot1ConfigProtocolEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1ConfigProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "LLDP configuration information that specifies the set of
        ports (represented as a PortList) on which the Local System
        Protocol instance is transmitted.

        This configuration object augments the
        lldpV2Xdot1LocProtoEntry, therefore it is only present
        along with the Protocol instance contained in the
        associated lldpV2Xdot1LocProtoEntry entry.

        Each active lldpV2Xdot1ConfigProtocolEntry is restored
        from non-volatile storage (along with the corresponding
        lldpV2Xdot1LocProtocolEntry) after a re-initialization of
        the management system."
    AUGMENTS { lldpV2Xdot1LocProtocolEntry }
    ::= { lldpV2Xdot1ConfigProtocolTable 1 }

LldpV2Xdot1ConfigProtocolEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigProtocolTxEnable  TruthValue
}

lldpV2Xdot1ConfigProtocolTxEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The boolean value that indicates whether the corresponding
        Local System Protocol Identity instance is transmitted
        on the port defined by the given
        lldpV2Xdot1LocProtocolEntry.

        The value of this object is restored from non-volatile
        storage after a re-initialization of the management
        system."
    REFERENCE
        "9.1.2.1 of IEEE Std 802.1AB"
    DEFVAL { false }
    ::= { lldpV2Xdot1ConfigProtocolEntry 1 }

--
-- lldpV2Xdot1ConfigVidUsageDigestTable: configure the transmission
-- of the VID Usage Digest TLVs on set of ports.
--
lldpV2Xdot1ConfigVidUsageDigestTable OBJECT-TYPE

```

IEEE Std 802.1Q™-2014/Cor 1-2015
 IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
 Corrigendum 1: Technical and editorial corrections

```

SYNTAX SEQUENCE OF LldpV2Xdot1ConfigVidUsageDigestEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "A table that controls selection of LLDP VID Usage Digest
    TLVs to be transmitted on individual ports."
 ::= { lldpV2Xdot1Config 5 }

lldpV2Xdot1ConfigVidUsageDigestEntry OBJECT-TYPE
SYNTAX LldpV2Xdot1ConfigVidUsageDigestEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "LLDP configuration information that specifies the set of
    ports (represented as a PortList) on which the local
    system VID Usage Digest instance will be transmitted.
    This configuration object augments the
    lldpLocVidUsageDigestEntry, therefore it is only present
    along with the VID Usage Digest instance
    contained in the associated lldpV2Xdot1LocVidUsageDigestEntry
    entry. Each active lldpConfigVidUsageDigestEntry must be
    restored from non-volatile storage and re-created (along with
    the corresponding lldpV2Xdot1LocVidUsageDigestEntry) after
    a re-initialization of the management system."
AUGMENTS { lldpV2Xdot1LocVidUsageDigestEntry }
 ::= { lldpV2Xdot1ConfigVidUsageDigestTable 1 }

LldpV2Xdot1ConfigVidUsageDigestEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigVidUsageDigestTxEnable TruthValue
}

lldpV2Xdot1ConfigVidUsageDigestTxEnable OBJECT-TYPE
SYNTAX TruthValue
MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "The boolean value that indicates whether the corresponding
    Local System VID Usage Digest instance will be transmitted
    on the port defined by the given
    lldpV2Xdot1LocVidUsageDigestEntry. The value of this object
    must be restored from non-volatile storage after a
    reinitialization of the management system."
REFERENCE
    "9.1.2.1 of IEEE Std 802.1AB"
DEFVAL { false }
 ::= { lldpV2Xdot1ConfigVidUsageDigestEntry 1 }

--
-- lldpV2Xdot1ConfigManVidTable : configure the transmission of the
-- Management VID TLVs on set of ports.
--
lldpV2Xdot1ConfigManVidTable OBJECT-TYPE
SYNTAX SEQUENCE OF LldpV2Xdot1ConfigManVidEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "A table that controls selection of LLDP Management VID
    TLVs to be transmitted on individual ports."

```

```

 ::= { lldpV2Xdot1Config 6 }

lldpV2Xdot1ConfigManVidEntry OBJECT-TYPE
    SYNTAX LldpV2Xdot1ConfigManVidEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "LLDP configuration information that specifies the set of
        port/destination address pairs on which the Local
        System Management VID will be transmitted.
        This configuration object augments the
        lldpV2Xdot1LocManVidEntry, therefore it is
        only present along with the Management VID contained
        in the associated lldpV2Xdot1LocManVidEntry entry.
        Each active lldpV2Xdot1ConfigManVidEntry must be
        restored from non-volatile storage (along with the
        corresponding lldpV2Xdot1LocManVidEntry) after a
        re-initialization of the management system."
    AUGMENTS { lldpV2Xdot1LocManVidEntry }
 ::= { lldpV2Xdot1ConfigManVidTable 1 }

LldpV2Xdot1ConfigManVidEntry ::= SEQUENCE {
    lldpV2Xdot1ConfigManVidTxEnable TruthValue
}

lldpV2Xdot1ConfigManVidTxEnable OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "The lldpV2Xdot1ConfigManVidTxEnable, which is defined as a
        truth value and configured by the network management,
        determines whether the IEEE 802.1 organizationally
        defined Management VID TLV transmission is allowed on a given
        LLDP transmission capable port.
        The value of this object must be restored from
        non-volatile storage after a re-initialization of the
        management system."
    REFERENCE
        "9.1.2.1 of IEEE Std 802.1AB"
    DEFVAL { false }
 ::= { lldpV2Xdot1ConfigManVidEntry 1 }

-----
-- IEEE 802.1 - Local System Information
-----

--
-- lldpV2Xdot1LocTable - indexed by ifIndex.
--

lldpV2Xdot1LocTable OBJECT-TYPE
    SYNTAX SEQUENCE OF LldpV2Xdot1LocEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains one row per port for IEEE 802.1
        organizationally defined LLDP extension on the local system

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

        known to this agent."
 ::= { lldpV2Xdot1LocalData 1 }

lldpV2Xdot1LocEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about IEEE 802.1 organizationally defined
        LLDP extension."
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot1LocTable 1 }

LldpV2Xdot1LocEntry ::= SEQUENCE {
    lldpV2Xdot1LocPortVlanId      Unsigned32
}

lldpV2Xdot1LocPortVlanId OBJECT-TYPE
    SYNTAX      Unsigned32(0|1..4094)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the port's VLAN
        identifier associated with the local system.  A value
        of zero shall be used if the system either does not know
        the PVID or does
        not support Port-based VLAN operation."
    REFERENCE
        "D.2.1.1"
    ::= { lldpV2Xdot1LocEntry 1 }

--
-- lldpV2Xdot1LocProtoVlanTable: Port and Protocol VLAN information
-- re-indexed by ifIndex.
--

lldpV2Xdot1LocProtoVlanTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1LocProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per Port and Protocol
        VLAN information about the local system."
    ::= { lldpV2Xdot1LocalData 2 }

lldpV2Xdot1LocProtoVlanEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Port and protocol VLAN ID Information about a particular
        port component.  There may be multiple port and protocol
        VLANs, identified by a particular
        lldpV2Xdot1LocProtoVlanId, configured on the given port."
    INDEX       { lldpV2LocPortIfIndex,
        lldpV2Xdot1LocProtoVlanId }
    ::= { lldpV2Xdot1LocProtoVlanTable 1 }

```

```

LldpV2Xdot1LocProtoVlanEntry ::= SEQUENCE {
    lldpV2Xdot1LocProtoVlanId      Unsigned32,
    lldpV2Xdot1LocProtoVlanSupported TruthValue,
    lldpV2Xdot1LocProtoVlanEnabled TruthValue
}

lldpV2Xdot1LocProtoVlanId OBJECT-TYPE
    SYNTAX      Unsigned32(0|1..4094)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the port and protocol
        VLANs associated with the given port associated with the
        local system. A value of zero shall be used if the system
        either does not know the protocol VLAN ID (PPVID) or does
        not support port and protocol VLAN operation."
    REFERENCE
        "D.2.2.2"
    ::= { lldpV2Xdot1LocProtoVlanEntry 1 }

lldpV2Xdot1LocProtoVlanSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the given port
        (associated with the local system) supports port and
        protocol VLANs."
    REFERENCE
        "D.2.2.1"
    ::= { lldpV2Xdot1LocProtoVlanEntry 2 }

lldpV2Xdot1LocProtoVlanEnabled OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the port and
        protocol VLANs are enabled on the given port associated
        with the local system."
    REFERENCE
        "D.2.2.1"
    ::= { lldpV2Xdot1LocProtoVlanEntry 3 }

--
-- lldpV2Xdot1LocVlanNameTable : VLAN name information about the local
-- system indexed by ifIndex.
--

lldpV2Xdot1LocVlanNameTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1LocVlanNameEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per IEEE 802.1Q VLAN
        name information on the local system known to this agent."

```

IEEE Std 802.1Q™-2014/Cor 1-2015
 IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
 Corrigendum 1: Technical and editorial corrections

```

 ::= { lldpV2Xdot1LocalData 3 }

lldpV2Xdot1LocVlanNameEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocVlanNameEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "VLAN name Information about a particular port component.
        There may be multiple VLANs, identified by a particular
        lldpV2Xdot1LocVlanId, configured on the given port."
    INDEX       { lldpV2LocPortIfIndex,
                  lldpV2Xdot1LocVlanId }
    ::= { lldpV2Xdot1LocVlanNameTable 1 }

LldpV2Xdot1LocVlanNameEntry ::= SEQUENCE {
    lldpV2Xdot1LocVlanId      VlanId,
    lldpV2Xdot1LocVlanName    SnmpAdminString
}

lldpV2Xdot1LocVlanId OBJECT-TYPE
    SYNTAX      VlanId
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the IEEE 802.1Q
        VLAN IDs with which the given port is compatible."
    REFERENCE
        "D.2.3.2"
    ::= { lldpV2Xdot1LocVlanNameEntry 1 }

lldpV2Xdot1LocVlanName OBJECT-TYPE
    SYNTAX      SnmpAdminString (SIZE(1..32))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The string value used to identify VLAN name identified
        by the Vlan Id associated with the given port on the
        local system.

        This object should contain the value of the
        dot1QVLANStaticName object (defined in IETF RFC 4363)
        identified with the given lldpV2Xdot1LocVlanId."
    REFERENCE
        "D.2.3.4"
    ::= { lldpV2Xdot1LocVlanNameEntry 2 }

--
-- lldpV2Xdot1LocProtocolTable : Protocol Identity information
-- re-indexed by ifIndex and destination address
--

lldpV2Xdot1LocProtocolTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1LocProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per protocol identity

```

```

        information on the local system known to this agent."
REFERENCE
    "D.2.4"
::= { lldpV2Xdot1LocalData 4 }

lldpV2Xdot1LocProtocolEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1LocProtocolEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Information about particular protocols that are accessible
    through the given port component.

    There may be multiple protocols, identified by particular
    lldpV2Xdot1ProtocolIndex, lldpV2LocPortIfIndex"
REFERENCE
    "D.2.4"
INDEX       { lldpV2LocPortIfIndex,
              lldpV2Xdot1LocProtocolIndex }
::= { lldpV2Xdot1LocProtocolTable 1 }

LldpV2Xdot1LocProtocolEntry ::= SEQUENCE {
    lldpV2Xdot1LocProtocolIndex Unsigned32,
    lldpV2Xdot1LocProtocolId    OCTET STRING
}

lldpV2Xdot1LocProtocolIndex OBJECT-TYPE
SYNTAX      Unsigned32(1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object represents an arbitrary local integer value
    used by this agent to identify a particular protocol
    identity."
::= { lldpV2Xdot1LocProtocolEntry 1 }

lldpV2Xdot1LocProtocolId OBJECT-TYPE
SYNTAX      OCTET STRING (SIZE (1..255))
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The octet string value used to identify the protocols
    associated with the given port of the local system."
REFERENCE
    "D.2.4.3"
::= { lldpV2Xdot1LocProtocolEntry 2 }

--
-- lldpV2Xdot1LocVidUsageDigestTable: Table of hash values of
-- system VID Usage Table transmitted
-- via VID Usage Digest TLV.
--

lldpV2Xdot1LocVidUsageDigestTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1LocVidUsageDigestEntry
MAX-ACCESS  not-accessible
STATUS      current

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

DESCRIPTION
    "This table contains one row per ifIndex/
    destination MAC address pair for usage digest
    information on the local system known to this agent."
REFERENCE
    "D.2.5"
::= { lldpV2Xdot1LocalData 5 }

lldpV2Xdot1LocVidUsageDigestEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Usage digest information to be transmitted
        through the given port."
    REFERENCE
        "D.2.5"
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot1LocVidUsageDigestTable 1 }

lldpV2Xdot1LocVidUsageDigestEntry ::= SEQUENCE {
    lldpV2Xdot1LocVidUsageDigest Unsigned32
}

lldpV2Xdot1LocVidUsageDigest OBJECT-TYPE
    SYNTAX      Unsigned32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The integer value obtained by applying the CRC32 function
        to the 128-octet VID Usage Table. A bit of the VID Usage
        Table contains the value PBB-TE-USAGE (binary 1) if the
        corresponding element of the MST Configuration Table
        (IEEE Std 802.1Q 8.9.1) contains the value PBB-TE MSTID
        (hex FFE) and otherwise contains the value NON-PBB-TE-USAGE
        (binary 0)."
```

REFERENCE

"D.2.5.1"

```

::= { lldpV2Xdot1LocVidUsageDigestEntry 1 }

--
-- lldpV2Xdot1LocManVidTable: Table of values configured on the Local
-- system for the Management VID, or the value 0 if a Management VID
-- has not been provisioned.
--

lldpV2Xdot1LocManVidTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1LocManVidEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per ifIndex/
        destination MAC address pair for usage digest
        information on the local system known to this agent."
    REFERENCE
        "D.2.6"
    ::= { lldpV2Xdot1LocalData 6 }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpV2Xdot1LocManVidEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocManVidEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Usage digest information to be transmitted
        through the given port."
    REFERENCE
        "D.2.6"
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot1LocManVidTable 1 }

lldpV2Xdot1LocManVidEntry ::= SEQUENCE {
    lldpV2Xdot1LocManVid Unsigned32
}

lldpV2Xdot1LocManVid OBJECT-TYPE
    SYNTAX      Unsigned32 (0|1..4094)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The integer value configured on the Local system for
        the Management VID, or
        the value 0 if a Management VID has not been provisioned."
    REFERENCE
        "D.2.6.1"
    ::= { lldpV2Xdot1LocManVidEntry 1 }

-----
-- IEEE 802.1 - Local System Information - Link Aggregation
-----

---
---
--- lldpV2Xdot1LocLinkAggTable: Link Aggregation Information Table
---
---

lldpV2Xdot1LocLinkAggTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1LocLinkAggEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per port of link aggregation
        information (as a part of the LLDP 802.1 organizational
        extension) on the local system known to this agent."
    ::= { lldpV2Xdot1LocalData 7 }

lldpV2Xdot1LocLinkAggEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1LocLinkAggEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Link Aggregation information about a particular port
        component."
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot1LocLinkAggTable 1 }

lldpV2Xdot1LocLinkAggEntry ::= SEQUENCE {

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

        lldpV2Xdot1LocLinkAggStatus      LldpV2XLinkAggStatusMap,
        lldpV2Xdot1LocLinkAggPortId      Unsigned32
    }

lldpV2Xdot1LocLinkAggStatus OBJECT-TYPE
    SYNTAX      LldpV2XLinkAggStatusMap
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The bitmap value contains the link aggregation
        capabilities and the current aggregation status of the
        link."
    REFERENCE
        "Annex F of IEEE Std 802.1AX-2014"
    ::= { lldpV2Xdot1LocLinkAggEntry 1 }

lldpV2Xdot1LocLinkAggPortId OBJECT-TYPE
    SYNTAX      Unsigned32(0|1..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the IEEE 802.1 aggregated port
        identifier, aAggPortID (IEEE Std 802.1AX, 6.3.2.1.1),
        derived from the ifNumber of the ifIndex for the port
        component in link aggregation.

        If the port is not in link aggregation state and/or it
        does not support link aggregation, this value should be set
        to zero."
    REFERENCE
        "Annex F of IEEE Std 802.1AX-2014"
    ::= { lldpV2Xdot1LocLinkAggEntry 2 }

-----
-- IEEE 802.1 - Remote System Information
-----

--
-- lldpV2Xdot1RemTable - re-indexed for ifIndex and destination MAC
-- address

lldpV2Xdot1RemTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per physical network
        connection known to this agent. The agent may wish to
        ensure that only one lldpV2Xdot1RemEntry is present for
        each local port, or it may choose to maintain multiple
        lldpV2Xdot1RemEntries for the same local port."
    ::= { lldpV2Xdot1RemoteData 1 }

lldpV2Xdot1RemEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemEntry
    MAX-ACCESS  not-accessible
    STATUS      current

```

```

DESCRIPTION
    "Information about a particular port component."
INDEX    { lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex }
 ::= { lldpV2Xdot1RemTable 1 }

lldpV2Xdot1RemEntry ::= SEQUENCE {
    lldpV2Xdot1RemPortVlanId      Unsigned32
}

lldpV2Xdot1RemPortVlanId OBJECT-TYPE
    SYNTAX      Unsigned32 (0|1..4094)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the port's VLAN
        identifier associated with the remote system.  if the
        remote system either does not know the PVID or does not
        support Port-based VLAN operation, the value of
        lldpV2Xdot1RemPortVlanId should be zero."
    REFERENCE
        "D.2.1.1"
    ::= { lldpV2Xdot1RemEntry 1 }

--
-- lldpV2Xdot1RemProtoVlanTable - re-indexed by ifIndex and
-- destination MAC address
--

lldpV2Xdot1RemProtoVlanTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per Port and Protocol
        VLAN information about the remote system, received on the
        given port."
    ::= { lldpV2Xdot1RemoteData 2 }

lldpV2Xdot1RemProtoVlanEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemProtoVlanEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Port and protocol VLAN name Information about a particular
        port component.  There may be multiple protocol VLANs,
        identified by a particular lldpV2Xdot1RemProtoVlanId,
        configured on the remote system."
    INDEX    { lldpV2RemTimeMark,
                lldpV2RemLocalIfIndex,
                lldpV2RemLocalDestMACAddress,
                lldpV2RemIndex,
                lldpV2Xdot1RemProtoVlanId }
    ::= { lldpV2Xdot1RemProtoVlanTable 1 }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

LldpV2Xdot1RemProtoVlanEntry ::= SEQUENCE {
    lldpV2Xdot1RemProtoVlanId      Unsigned32,
    lldpV2Xdot1RemProtoVlanSupported TruthValue,
    lldpV2Xdot1RemProtoVlanEnabled TruthValue
}

lldpV2Xdot1RemProtoVlanId OBJECT-TYPE
    SYNTAX      Unsigned32(0|1..4094)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The integer value used to identify the port and protocol
        VLANs associated with the given port associated with the
        remote system.

        If port and protocol VLANs are not supported on the given
        port associated with the remote system, or if the port is
        not enabled with any port and protocol VLAN, the value of
        lldpV2Xdot1RemProtoVlanId should be zero."
    REFERENCE
        "D.2.2.2"
    ::= { lldpV2Xdot1RemProtoVlanEntry 1 }

lldpV2Xdot1RemProtoVlanSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the given port
        (associated with the remote system) is capable of
        supporting port and protocol VLANs."
    REFERENCE
        "D.2.2.1"
    ::= { lldpV2Xdot1RemProtoVlanEntry 2 }

lldpV2Xdot1RemProtoVlanEnabled OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the port and
        protocol VLANs are enabled on the given port associated
        with
        the remote system."
    REFERENCE
        "D.2.2.1"
    ::= { lldpV2Xdot1RemProtoVlanEntry 3 }

--
-- lldpV2Xdot1RemVlanNameTable : VLAN name information of the remote
--                               systems
-- Re-indexed by ifIndex and destination MAC address
--

lldpV2Xdot1RemVlanNameTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemVlanNameEntry
    MAX-ACCESS  not-accessible

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

STATUS          current
DESCRIPTION
    "This table contains one or more rows per IEEE 802.1Q VLAN
    name information about the remote system, received on the
    given port."
REFERENCE
    "D.2.3"
::= { lldpV2Xdot1RemoteData 3 }

lldpV2Xdot1RemVlanNameEntry OBJECT-TYPE
SYNTAX          LldpV2Xdot1RemVlanNameEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "VLAN name Information about a particular port component.
    There may be multiple VLANs, identified by a particular
    lldpV2Xdot1RemVlanId, received on the given port."
INDEX           { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress,
                  lldpV2RemIndex,
                  lldpV2Xdot1RemVlanId }
::= { lldpV2Xdot1RemVlanNameTable 1 }

LldpV2Xdot1RemVlanNameEntry ::= SEQUENCE {
    lldpV2Xdot1RemVlanId      VlanId,
    lldpV2Xdot1RemVlanName    SnmpAdminString
}

lldpV2Xdot1RemVlanId OBJECT-TYPE
SYNTAX          VlanId
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "The integer value used to identify the IEEE 802.1Q
    VLAN IDs with which the given port of the remote system
    is compatible."
REFERENCE
    "D.2.3.2"
::= { lldpV2Xdot1RemVlanNameEntry 1 }

lldpV2Xdot1RemVlanName OBJECT-TYPE
SYNTAX          SnmpAdminString (SIZE(1..32))
MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "The string value used to identify VLAN name identified
    by the VLAN Id associated with the remote system."
REFERENCE
    "D.2.3.4"
::= { lldpV2Xdot1RemVlanNameEntry 2 }

--
-- lldpV2Xdot1RemProtocolTable : Protocol information of the remote
-- systems Re-indexed by ifIndex and destination MAC address
--

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpV2Xdot1RemProtocolTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one or more rows per protocol
        information about the remote system, received on
        the given port."
    ::= { lldpV2Xdot1RemoteData 4 }

lldpV2Xdot1RemProtocolEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemProtocolEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Protocol information about a particular port component.
        There may be multiple protocols, identified by a particular
        lldpV2Xdot1ProtocolIndex, received on the given port."
    INDEX      { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress,
                  lldpV2RemIndex,
                  lldpV2Xdot1RemProtocolIndex }
    ::= { lldpV2Xdot1RemProtocolTable 1 }

LldpV2Xdot1RemProtocolEntry ::= SEQUENCE {
    lldpV2Xdot1RemProtocolIndex  Unsigned32,
    lldpV2Xdot1RemProtocolId     OCTET STRING
}

lldpV2Xdot1RemProtocolIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object represents an arbitrary local integer value
        used by this agent to identify a particular protocol
        identity."
    ::= { lldpV2Xdot1RemProtocolEntry 1 }

lldpV2Xdot1RemProtocolId OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE (1..255))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The octet string value used to identify the protocols
        associated with the given port of remote system."
    REFERENCE
        "D.2.4.3"
    ::= { lldpV2Xdot1RemProtocolEntry 2 }

--
-- lldpV2Xdot1RemVidUsageDigestTable: Table of hash values of
-- system VID Usage Table received
-- via VID Usage Digest TLV.
-- This version replaced by a reindexed version (V2).

```

--

```
lldpV2Xdot1RemVidUsageDigestTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      deprecated
    DESCRIPTION
        "This table contains one row per ifIndex/
        destination MAC address pair for usage digest
        information received by the local system."
    REFERENCE
        "D.2.5"
    ::= { lldpV2Xdot1RemoteData 5 }
```

```
lldpV2Xdot1RemVidUsageDigestEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemVidUsageDigestEntry
    MAX-ACCESS  not-accessible
    STATUS      deprecated
    DESCRIPTION
        "Usage digest information received on
        the given port/destination address pair."
    REFERENCE
        "D.2.5"
    INDEX      { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress }
    ::= { lldpV2Xdot1RemVidUsageDigestTable 1 }
```

```
LldpV2Xdot1RemVidUsageDigestEntry ::= SEQUENCE {
    lldpV2Xdot1RemVidUsageDigest Unsigned32
}
```

```
lldpV2Xdot1RemVidUsageDigest OBJECT-TYPE
    SYNTAX Unsigned32
    MAX-ACCESS read-only
    STATUS deprecated
    DESCRIPTION
        "The integer value obtained by applying the CRC32 function
        to the 128-octet VID Usage Table. A bit of the VID Usage
        Table contains the value PBB-TE-USAGE (binary 1) if the
        corresponding element of the MST Configuration Table
        (IEEE Std 802.1Q 8.9.1) contains the value PBB-TE MSTID
        (hex FFE) and otherwise contains the value NON-PBB-TE-USAGE
        (binary 0)."
```

```
REFERENCE
    "D.2.5.1"
::= { lldpV2Xdot1RemVidUsageDigestEntry 1 }
```

--

```
-- lldpV2Xdot1RemManVidTable: Table of values configured on remote
-- systems for the Management VID, or the value 0 if a Management
-- VID has not been provisioned.
-- This version replaced by a reindexed version (V2).
--
```

```
lldpV2Xdot1RemManVidTable OBJECT-TYPE
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

SYNTAX      SEQUENCE OF LldpV2Xdot1RemManVidEntry
MAX-ACCESS  not-accessible
STATUS      deprecated
DESCRIPTION
    "This table contains one row per ifIndex/
    destination MAC address pair for management VID
    information received from remote systems."
REFERENCE
    "D.2.6"
 ::= { lldpV2Xdot1RemoteData 6 }

lldpV2Xdot1RemManVidEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot1RemManVidEntry
MAX-ACCESS  not-accessible
STATUS      deprecated
DESCRIPTION
    "Management VID information received
    through the given port/destination address pair."
REFERENCE
    "D.2.6"
INDEX       { lldpV2RemTimeMark,
              lldpV2RemLocalIfIndex,
              lldpV2RemLocalDestMACAddress }
 ::= { lldpV2Xdot1RemManVidTable 1 }

LldpV2Xdot1RemManVidEntry ::= SEQUENCE {
    lldpV2Xdot1RemManVid      Unsigned32
}

lldpV2Xdot1RemManVid OBJECT-TYPE
SYNTAX      Unsigned32 (0|1..4094)
MAX-ACCESS  read-only
STATUS      deprecated
DESCRIPTION
    "The integer value configured on a system for
    the Management VID, or
    the value 0 if a Management VID has not been provisioned."
REFERENCE
    "D.2.6.1"
 ::= { lldpV2Xdot1RemManVidEntry 1 }

--
-- lldpV2Xdot1RemVidUsageDigestV2Table: Table of hash values of
-- system VID Usage Table received
-- via VID Usage Digest TLV.
--

lldpV2Xdot1RemVidUsageDigestV2Table OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot1RemVidUsageDigestV2Entry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per ifIndex/
    destination MAC address pair for usage digest
    information received by the local system."
REFERENCE

```

```

        "D.2.5"
 ::= { lldpV2Xdot1RemoteData 8 }

lldpV2Xdot1RemVidUsageDigestV2Entry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemVidUsageDigestV2Entry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Usage digest information received on
         the given port/destination address pair."
    REFERENCE
        "D.2.5"
    INDEX       { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress,
                  lldpV2RemIndex }
 ::= { lldpV2Xdot1RemVidUsageDigestV2Table 1 }

LldpV2Xdot1RemVidUsageDigestV2Entry ::= SEQUENCE {
    lldpV2Xdot1RemVidUsageDigestV2  Unsigned32
}

lldpV2Xdot1RemVidUsageDigestV2 OBJECT-TYPE
    SYNTAX      Unsigned32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The integer value obtained by applying the CRC32 function
         to the 128-octet VID Usage Table. A bit of the VID Usage
         Table contains the value PBB-TE-USAGE (binary 1) if the
         corresponding element of the MST Configuration Table
         (IEEE Std 802.1Q 8.9.1) contains the value PBB-TE MSTID
         (hex FFE) and otherwise contains the value NON-PBB-TE-USAGE
         (binary 0)."
```

REFERENCE

```

        "D.2.5.1"
 ::= { lldpV2Xdot1RemVidUsageDigestV2Entry 1 }

--
-- lldpV2Xdot1RemManVidV2Table: Table of values configured on remote
-- systems for the Management VID, or the value 0 if a Management
-- VID has not been provisioned.
--

lldpV2Xdot1RemManVidV2Table OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemManVidV2Entry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per ifIndex/
         destination MAC address pair for management VID
         information received from remote systems."
    REFERENCE
        "D.2.6"
 ::= { lldpV2Xdot1RemoteData 9 }

lldpV2Xdot1RemManVidV2Entry OBJECT-TYPE
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

SYNTAX      LldpV2Xdot1RemManVidV2Entry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Management VID information received
    through the given port/destination address pair."
REFERENCE
    "D.2.6"
INDEX       { lldpV2RemTimeMark,
              lldpV2RemLocalIfIndex,
              lldpV2RemLocalDestMACAddress,
              lldpV2RemIndex }
 ::= { lldpV2Xdot1RemManVidV2Table 1 }

LldpV2Xdot1RemManVidV2Entry ::= SEQUENCE {
    lldpV2Xdot1RemManVidV2      Unsigned32
}

lldpV2Xdot1RemManVidV2 OBJECT-TYPE
    SYNTAX Unsigned32 (0|1..4094)
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "The integer value configured on a system for
        the Management VID, or
        the value 0 if a Management VID has not been provisioned."
    REFERENCE
        "D.2.6.1"
 ::= { lldpV2Xdot1RemManVidV2Entry 1 }

-----
-- Remote System Information - Link Aggregation
-----

---
---
--- lldpV2Xdot1RemLinkAggTable: Link Aggregation Information Table
---
---
lldpV2Xdot1RemLinkAggTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemLinkAggEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains port link aggregation information
        (as a part of the LLDP IEEE 802.1 organizational extension)
        of the remote system."
    ::= { lldpV2Xdot1RemoteData 7 }

lldpV2Xdot1RemLinkAggEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemLinkAggEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Link Aggregation information about remote system's port
        component."
    INDEX       { lldpV2RemTimeMark,

```

```

        lldpV2RemLocalIfIndex,
        lldpV2RemLocalDestMACAddress,
        lldpV2RemIndex }
 ::= { lldpV2Xdot1RemLinkAggTable 1 }

LldpV2Xdot1RemLinkAggEntry ::= SEQUENCE {
        lldpV2Xdot1RemLinkAggStatus          LldpV2XLinkAggStatusMap,
        lldpV2Xdot1RemLinkAggPortId          Unsigned32
}

lldpV2Xdot1RemLinkAggStatus OBJECT-TYPE
    SYNTAX      LldpV2XLinkAggStatusMap
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "The bitmap value contains the link aggregation capabilities
        and the current aggregation status of the link."
    REFERENCE
        "Annex F of IEEE Std 802.1AX-2014"
    ::= { lldpV2Xdot1RemLinkAggEntry 1 }

lldpV2Xdot1RemLinkAggPortId OBJECT-TYPE
    SYNTAX      Unsigned32(0|1..2147483647)
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "This object contains the IEEE 802.1 aggregated port
        identifier, aAggPortID (IEEE Std 802.1AX, 6.3.2.1.1),
        derived from the ifNumber of the ifIndex for the port
        component associated with the remote system.

        If the remote port is not in link aggregation state and/or
        it does not support link aggregation, this value should be
        zero."
    REFERENCE
        "Annex F of IEEE Std 802.1AX-2014"
    ::= { lldpV2Xdot1RemLinkAggEntry 2 }

```

-- Conformance Information for the basicSet TLV set

```

lldpV2Xdot1Conformance
    OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 2 }
lldpV2Xdot1Compliances
    OBJECT IDENTIFIER ::= { lldpV2Xdot1Conformance 1 }
lldpV2Xdot1Groups
    OBJECT IDENTIFIER ::= { lldpV2Xdot1Conformance 2 }

```

-- compliance statements

```

lldpV2Xdot1TxRxCompliance MODULE-COMPLIANCE
    STATUS       current
    DESCRIPTION
        "A compliance statement for SNMP entities that implement
        the IEEE 802.1 organizationally defined LLDP extension MIB.

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

This group is mandatory for all agents that implement the LLDP 802.1 organizational extension in TX and/or RX mode for the basicSet TLV set.

This version defines compliance requirements for V2 of the LLDP MIB."

```
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1ConfigGroup,
                        ifGeneralInformationGroup
    }
::= { lldpV2Xdot1Compliances 1 }
```

lldpV2Xdot1TxCompliance MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"A compliance statement for SNMP entities that implement the IEEE 802.1 organizationally defined LLDP extension MIB.

This group is mandatory for agents that implement the LLDP 802.1 organizational extension in the RX mode for the basicSet TLV set.

This version defines compliance requirements for V2 of the LLDP MIB."

```
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1LocSysGroup }

::= { lldpV2Xdot1Compliances 2 }
```

lldpV2Xdot1RxCompliance MODULE-COMPLIANCE

STATUS deprecated

DESCRIPTION

"A compliance statement for SNMP entities that implement the IEEE 802.1 organizationally defined LLDP extension MIB.

This group is mandatory for agents that implement the LLDP 802.1 organizational extension in the RX mode for the basicSet TLV set.

This version defines compliance requirements for V2 of the LLDP MIB."

```
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1RemSysGroup }

::= { lldpV2Xdot1Compliances 3 }
```

lldpV2Xdot1RxComplianceV2 MODULE-COMPLIANCE

STATUS current

DESCRIPTION

"A compliance statement for SNMP entities that implement the IEEE 802.1 organizationally defined LLDP extension MIB.

This group is mandatory for agents that implement the LLDP 802.1 organizational extension in the RX mode for the basicSet TLV set.

This version defines compliance requirements for V2 of the LLDP MIB."

```

MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot1RemSysV2Group }

    ::= { lldpV2Xdot1Compliances 4 }

-- MIB groupings for the basicSet TLV set

lldpV2Xdot1ConfigGroup    OBJECT-GROUP
    OBJECTS {
        lldpV2Xdot1ConfigPortVlanTxEnable,
        lldpV2Xdot1ConfigVlanNameTxEnable,
        lldpV2Xdot1ConfigProtoVlanTxEnable,
        lldpV2Xdot1ConfigProtocolTxEnable,
        lldpV2Xdot1ConfigVidUsageDigestTxEnable,
        lldpV2Xdot1ConfigManVidTxEnable
    }
    STATUS current
    DESCRIPTION
        "The collection of objects which are used to configure the
        IEEE 802.1 organizationally defined LLDP extension
        implementation behavior for the basicSet TLV set."
    ::= { lldpV2Xdot1Groups 1 }

lldpV2Xdot1LocSysGroup    OBJECT-GROUP
    OBJECTS {
        lldpV2Xdot1LocPortVlanId,
        lldpV2Xdot1LocProtoVlanSupported,
        lldpV2Xdot1LocProtoVlanEnabled,
        lldpV2Xdot1LocVlanName,
        lldpV2Xdot1LocProtocolId,
        lldpV2Xdot1LocVidUsageDigest,
        lldpV2Xdot1LocManVid,
        lldpV2Xdot1LocLinkAggStatus,
        lldpV2Xdot1LocLinkAggPortId
    }
    STATUS current
    DESCRIPTION
        "The collection of objects which are used to represent
        IEEE 802.1 organizationally defined LLDP extension
        associated with the Local Device Information for the
        basicSet TLV set."
    ::= { lldpV2Xdot1Groups 2 }

lldpV2Xdot1RemSysGroup    OBJECT-GROUP
    OBJECTS {
        lldpV2Xdot1RemPortVlanId,
        lldpV2Xdot1RemProtoVlanSupported,
        lldpV2Xdot1RemProtoVlanEnabled,
        lldpV2Xdot1RemVlanName,
        lldpV2Xdot1RemProtocolId,
        lldpV2Xdot1RemVidUsageDigest,
        lldpV2Xdot1RemManVid,
        lldpV2Xdot1RemLinkAggStatus,
        lldpV2Xdot1RemLinkAggPortId
    }
    STATUS deprecated
    DESCRIPTION
        "The collection of objects which are used to represent LLDP

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

    802.1 organizational extension Remote Device Information
    for the basicSet TLV set."
 ::= { lldpV2Xdot1Groups 3 }

lldpV2Xdot1RemSysV2Group OBJECT-GROUP
  OBJECTS {
    lldpV2Xdot1RemPortVlanId,
    lldpV2Xdot1RemProtoVlanSupported,
    lldpV2Xdot1RemProtoVlanEnabled,
    lldpV2Xdot1RemVlanName,
    lldpV2Xdot1RemProtocolId,
    lldpV2Xdot1RemVidUsageDigestV2,
    lldpV2Xdot1RemManVidV2,
    lldpV2Xdot1RemLinkAggStatus,
    lldpV2Xdot1RemLinkAggPortId
  }
  STATUS current
  DESCRIPTION
    "The collection of objects which are used to represent LLDP
    802.1 organizational extension Remote Device Information
    for the basicSet TLV set."
 ::= { lldpV2Xdot1Groups 4 }

-----
--
--
-- Organizational Defined Information Extension - IEEE 802.1
-- Definitions to support the cnSet TLV set (Table D-1)
-- for Congestion Notification
--
-----

lldpXdot1CnMIB OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 3 }
lldpXdot1CnObjects OBJECT IDENTIFIER ::= { lldpXdot1CnMIB 1 }

-- CN 802.1 MIB Extension groups

lldpXdot1CnConfig OBJECT IDENTIFIER ::= { lldpXdot1CnObjects 1 }
lldpXdot1CnLocalData OBJECT IDENTIFIER ::= { lldpXdot1CnObjects 2 }
lldpXdot1CnRemoteData OBJECT IDENTIFIER ::= { lldpXdot1CnObjects 3 }

-----
-- Textual conventions for Congestion Notification
-----

LldpV2CnBitVector ::= TEXTUAL-CONVENTION
  STATUS current
  DESCRIPTION
    "This TC describes a bit vector used in the Congestion
    Notification objects. Each bit represents a Boolean status
    associated with a priority code point. A bit value of 0
    represents FALSE, 1 represents TRUE.

    The bit 'pri0status(0)' indicates the status for priority 0
    The bit 'pri1status(1)' indicates the status for priority 1
    The bit 'pri2status(2)' indicates the status for priority 2
    The bit 'pri3status(3)' indicates the status for priority 3
    The bit 'pri4status(4)' indicates the status for priority 4
  
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

The bit 'pri5status(5)' indicates the status for priority 5
The bit 'pri6status(6)' indicates the status for priority 6
The bit 'pri7status(7)' indicates the status for priority 7"

```
SYNTAX  BITS {
    pri0status(0),
    pri1status(1),
    pri2status(2),
    pri3status(3),
    pri4status(4),
    pri5status(5),
    pri6status(6),
    pri7status(7)
}
```

```
-----
-- IEEE 802.1 - Congestion Notification Configuration
-----
```

```
--
-- lldpXdot1CnConfigCnTable : configure the
-- transmission of the Congestion Notification TLV on a set of ports
--
```

```
lldpXdot1CnConfigCnTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1CnConfigCnEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "A table that controls selection of Congestion Notification
        TLVs to be transmitted on individual ports."
    ::= { lldpXdot1CnConfig 1 }
```

```
lldpXdot1CnConfigCnEntry OBJECT-TYPE
    SYNTAX      LldpXdot1CnConfigCnEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "LLDP configuration information that controls the
        transmission of IEEE 802.1 organizationally defined
        Congestion Notification TLV on LLDP transmission capable ports.
```

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

```
AUGMENTS      { lldpV2PortConfigEntry }
::= { lldpXdot1CnConfigCnTable 1 }
```

```
LldpXdot1CnConfigCnEntry ::= SEQUENCE {
    lldpXdot1CnConfigCnTxEnable TruthValue
}
```

```
lldpXdot1CnConfigCnTxEnable OBJECT-TYPE
    SYNTAX      TruthValue
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The lldpXdot1CnConfigCnTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined Congestion Notification TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.8"

DEFVAL { false }

::= { lldpXdot1CnConfigCnEntry 1 }

-- IEEE 802.1 - Congestion Notification Local System Information

--- lldpV2Xdot1LocCnTable: Port Extension Information Table

lldpV2Xdot1LocCnTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpV2Xdot1LocCnEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains one row per port of Congestion Notification information (as a part of the LLDP 802.1 organizational extension) on the local system known to this agent."

::= { lldpXdot1CnLocalData 1 }

lldpV2Xdot1LocCnEntry OBJECT-TYPE

SYNTAX LldpV2Xdot1LocCnEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Congestion Notification information about a particular port component."

INDEX { lldpV2LocPortIfIndex }

::= { lldpV2Xdot1LocCnTable 1 }

LldpV2Xdot1LocCnEntry ::= SEQUENCE {

lldpV2Xdot1LocCNPVIndicators LldpV2CnBitVector,

lldpV2Xdot1LocReadyIndicators LldpV2CnBitVector

}

lldpV2Xdot1LocCNPVIndicators OBJECT-TYPE

SYNTAX LldpV2CnBitVector

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object contains the CNPV indicators for the Port."

REFERENCE

```

        "D.2.8.3"
 ::= { lldpV2Xdot1LocCnEntry 1 }

lldpV2Xdot1LocReadyIndicators OBJECT-TYPE
    SYNTAX      LldpV2CnBitVector
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the Ready indicators
        for the Port."
    REFERENCE
        "D.2.8.4"
 ::= { lldpV2Xdot1LocCnEntry 2 }

-----
-- IEEE 802.1 - Congestion Notification Remote System Information
-----

---
---
--- lldpV2Xdot1RemCnTable: Port Extension Information Table
---
---
lldpV2Xdot1RemCnTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot1RemCnEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains Congestion Notification information
        (as a part of the LLDP IEEE 802.1 organizational extension)
        of the remote system."
 ::= { lldpXdot1CnRemoteData 1 }

lldpV2Xdot1RemCnEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot1RemCnEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Port Extension information about remote systems port
        component."
    INDEX      { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress,
                  lldpV2RemIndex }
 ::= { lldpV2Xdot1RemCnTable 1 }

lldpV2Xdot1RemCnEntry ::= SEQUENCE {
    lldpV2Xdot1RemCNPVIndicators  LldpV2CnBitVector,
    lldpV2Xdot1RemReadyIndicators LldpV2CnBitVector
}

lldpV2Xdot1RemCNPVIndicators OBJECT-TYPE
    SYNTAX      LldpV2CnBitVector
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the CNPV indicators
        for the Port."
    REFERENCE

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

        "D.2.8.3"
 ::= { lldpV2Xdot1RemCnEntry 1 }

lldpV2Xdot1RemReadyIndicators OBJECT-TYPE
    SYNTAX      LldpV2CnBitVector
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the Ready indicators
        for the Port."
    REFERENCE
        "D.2.8.4"
 ::= { lldpV2Xdot1RemCnEntry 2 }

-----
-- IEEE 802.1 - Congestion Notification Conformance Information
-----

lldpXdot1CnConformance OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 4 }

lldpXdot1CnCompliances
    OBJECT IDENTIFIER ::= { lldpXdot1CnConformance 1 }
lldpXdot1CnGroups OBJECT IDENTIFIER ::= { lldpXdot1CnConformance 2 }

--
-- Congestion Notification - Compliance Statements
--

lldpXdot1CnCompliance MODULE-COMPLIANCE
    STATUS      current
    DESCRIPTION
        "A compliance statement for SNMP entities that implement
        the IEEE 802.1 organizationally defined Congestion
        Notification LLDP extension MIB.

        This group is mandatory for agents that implement the
        Congestion Notification cnSet TLV set."
    MODULE      -- this module
        MANDATORY-GROUPS { lldpXdot1CnGroup,
                           ifGeneralInformationGroup }
    ::= { lldpXdot1CnCompliances 1 }

--
-- Congestion Notification - MIB groupings
--

lldpXdot1CnGroup OBJECT-GROUP
    OBJECTS {
        lldpXdot1CnConfigCnTxEnable,
        lldpV2Xdot1LocCNPVIndicators,
        lldpV2Xdot1LocReadyIndicators,
        lldpV2Xdot1RemCNPVIndicators,
        lldpV2Xdot1RemReadyIndicators
    }
    STATUS      current
    DESCRIPTION
        "The collection of objects that support the
        Congestion Notification cnSet TLV set."

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

::= { lldpXdot1CnGroups 1 }

-----
-----
--
-- Organizational Defined Information Extension - IEEE 802.1
-- Definitions to support the Data Center eXchange Protocol
-- (DCBX) TLV set (Table D-1)
--
-----

lldpXdot1dcbxMIB OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 5 }
lldpXdot1dcbxObjects OBJECT IDENTIFIER ::= { lldpXdot1dcbxMIB 1 }

-- DCBX 802.1 MIB Extension groups

lldpXdot1dcbxConfig OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 1 }
lldpXdot1dcbxLocalData OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 2 }
lldpXdot1dcbxRemoteData OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 3 }
lldpXdot1dcbxAdminData OBJECT IDENTIFIER ::= { lldpXdot1dcbxObjects 4 }

-----
-- IEEE 802.1 - DCBX Textual Conventions
-----

LldpXdot1dcbxTrafficClassValue ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS current
    DESCRIPTION
        "Indicates a traffic class. Values 0-7 correspond to
        traffic classes."
    SYNTAX Unsigned32 (0..7)

LldpXdot1dcbxTrafficClassBandwidthValue ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS current
    DESCRIPTION
        "Indicates the bandwidth in percent assigned to a
        traffic class."
    SYNTAX Unsigned32 (0..100)

LldpXdot1dcbxAppSelector ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        "Indicates the contents of a protocol object
        1: Ethertype
        2: Well Known Port number over TCP, or SCTP
        3: Well Known Port number over UDP, or DCCP
        4: Well Known Port number over TCP, SCTP, UDP, and DCCP"
    SYNTAX INTEGER {
        asEthertype(1),
        asTCPPortNumber(2),
        asUDPPortNumber(3),
        asTCPUDPPortNumber(4)
    }

LldpXdot1dcbxAppProtocol ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS current

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

DESCRIPTION
    "Contains the application protocol indicator the
    type of which is specified by an object with
    the syntax of
    LldpXdot1dcbxAppSelector"
SYNTAX Unsigned32 (0..65535)

LldpXdot1dcbxSupportedCapacity ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "d"
    STATUS current
    DESCRIPTION
        "Indicates the supported capacity of a given feature,
        for example, the number of traffic classes supported.
        This TC is used for features that have a maximum
        capacity of eight and a minimum of one."
    SYNTAX Unsigned32 (1..8)

LldpXdot1dcbxTrafficSelectionAlgorithm ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        "Indicates the Traffic Selection Algorithm
        0: Strict Priority
        1: Credit-based shaper
        2: Enhanced transmission selection
        3-254: Reserved for future standardization
        255: Vendor specific"
    SYNTAX INTEGER {
        tsaStrictPriority(0),
        tsaCreditBasedShaper(1),
        tsaEnhancedTransmission(2),
        tsaVendorSpecific(255)
    }

-----
-- IEEE 802.1 - DCBX Configuration
-----

--
-- lldpXdot1dcbxConfigETSTable : configure the
-- transmission of the ETS Configuration TLV on a set of ports
--

lldpXdot1dcbxConfigETSTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxConfigETSTableEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table that controls selection of ETS Configuration
        TLVs to be transmitted on individual ports."
    ::= { lldpXdot1dcbxConfig 1 }

lldpXdot1dcbxConfigETSTableEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxConfigETSTableEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "LLDP configuration information that controls the
        transmission of IEEE 802.1 organizationally defined
        ETS Configuration TLV on LLDP transmission capable ports."

```

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

```
AUGMENTS      { lldpV2PortConfigEntry }
::= { lldpXdot1dcbxConfigETSConfigurationTable 1 }
```

```
LldpXdot1dcbxConfigETSConfigurationEntry ::= SEQUENCE {
    lldpXdot1dcbxConfigETSConfigurationTxEnable TruthValue
}
```

lldpXdot1dcbxConfigETSConfigurationTxEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The lldpXdot1dcbxConfigETSConfigurationTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined ETS Configuration TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.9"

DEFVAL { false }

```
::= { lldpXdot1dcbxConfigETSConfigurationEntry 1 }
```

--

```
-- lldpXdot1dcbxConfigETSRecommendationTable : configure the
-- transmission of the ETS Recommendation TLV on a set of ports
--
```

lldpXdot1dcbxConfigETSRecommendationTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpXdot1dcbxConfigETSRecommendationEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table that controls selection of ETS Recommendation TLVs to be transmitted on individual ports."

```
::= { lldpXdot1dcbxConfig 2 }
```

lldpXdot1dcbxConfigETSRecommendationEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxConfigETSRecommendationEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined ETS Recommendation TLV on LLDP transmission capable ports.

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

configuration defined by the associated lldpV2PortConfigEntry entry.

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

```
AUGMENTS      { lldpV2PortConfigEntry }
::= { lldpXdot1dcbxConfigETSRecommendationTable 1 }
```

```
LldpXdot1dcbxConfigETSRecommendationEntry ::= SEQUENCE {
    lldpXdot1dcbxConfigETSRecommendationTxEnable TruthValue
}
```

lldpXdot1dcbxConfigETSRecommendationTxEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The lldpXdot1dcbxConfigETSRecommendationTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined ETS Recommendation TLV transmission is allowed on a given LLDP transmission capable port.

The value of this object is restored from non-volatile storage after a re-initialization of the management system."

REFERENCE

"D.2.10"

DEFVAL { false }

```
::= { lldpXdot1dcbxConfigETSRecommendationEntry 1 }
```

--

```
-- lldpXdot1dcbxConfigPFCTable : configure the transmission of the
-- Priority-based Flow Control Configuration TLV on a set of ports
--
```

lldpXdot1dcbxConfigPFCTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpXdot1dcbxConfigPFCEntity

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table that controls selection of Priority-based Flow Control Configuration TLVs to be transmitted on individual ports."

```
::= { lldpXdot1dcbxConfig 3 }
```

lldpXdot1dcbxConfigPFCEntity OBJECT-TYPE

SYNTAX LldpXdot1dcbxConfigPFCEntity

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Priority-based Flow Control Configuration TLV on LLDP transmission capable ports.

This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry) after a re-initialization of the management system."

AUGMENTS { lldpV2PortConfigEntry }

::= { lldpXdot1dcbxConfigPFCTable 1 }

LldpXdot1dcbxConfigPFCEntEntry ::= SEQUENCE {
 lldpXdot1dcbxConfigPFCTxEnable TruthValue
}

lldpXdot1dcbxConfigPFCTxEnable OBJECT-TYPE
SYNTAX TruthValue
MAX-ACCESS read-write
STATUS current
DESCRIPTION
 "The lldpXdot1dcbxConfigPFCTxEnable, which is defined as a truth value and configured by the network management, determines whether the IEEE 802.1 organizationally defined Priority-based Flow Control Configuration TLV transmission is allowed on a given LLDP transmission capable port.

 The value of this object is restored from non-volatile storage after a re-initialization of the management system."
REFERENCE
 "D.2.11"
DEFVAL { false }
::= { lldpXdot1dcbxConfigPFCEntEntry 1 }

--
-- lldpXdot1dcbxConfigApplicationPriorityTable : configure the
-- transmission of the Application Priority TLV on a set of ports
--

lldpXdot1dcbxConfigApplicationPriorityTable OBJECT-TYPE
SYNTAX SEQUENCE OF
 LldpXdot1dcbxConfigApplicationPriorityEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
 "A table that controls selection of Priority-based Flow Control Configuration TLVs to be transmitted on individual ports."
::= { lldpXdot1dcbxConfig 4 }

lldpXdot1dcbxConfigApplicationPriorityEntry OBJECT-TYPE
SYNTAX LldpXdot1dcbxConfigApplicationPriorityEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
 "LLDP configuration information that controls the transmission of IEEE 802.1 organizationally defined Application Priority TLV on LLDP transmission capable ports.

 This configuration object augments the lldpV2PortConfigEntry of the LLDP-MIB, therefore it is only present along with the port configuration defined by the associated lldpV2PortConfigEntry entry.

 Each active lldpConfigEntry is restored from non-volatile storage (along with the corresponding lldpV2PortConfigEntry)

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

    after a re-initialization of the management system."
AUGMENTS      { lldpV2PortConfigEntry }
::= { lldpXdot1dcbxConfigApplicationPriorityTable 1 }

lldpXdot1dcbxConfigApplicationPriorityEntry ::= SEQUENCE {
    lldpXdot1dcbxConfigApplicationPriorityTxEnable TruthValue
}

lldpXdot1dcbxConfigApplicationPriorityTxEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-write
    STATUS       current
    DESCRIPTION
        "The lldpXdot1dcbxConfigApplicationPriorityTxEnable, which
        is defined as a truth value and configured by the network
        management, determines whether the IEEE 802.1 organizationally
        defined Application Priority TLV transmission is allowed on
        a given LLDP transmission capable port.

        The value of this object is restored from non-volatile
        storage after a re-initialization of the management system."
    REFERENCE
        "D.2.12"
    DEFVAL       { false }
    ::= { lldpXdot1dcbxConfigApplicationPriorityEntry 1 }

-----
-- IEEE 802.1 - DCBX Local System Information
-----

--
-- lldpXdot1dcbxLocETSConfigurationTable - Contains the information
-- for the ETS Configuration TLV.
--
lldpXdot1dcbxLocETSConfiguration OBJECT IDENTIFIER
    ::= { lldpXdot1dcbxLocalData 1 }

lldpXdot1dcbxLocETSBasicConfigurationTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxLocETSBasicConfigurationEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "This table contains one row per port for the IEEE 802.1
        organizationally defined LLDP ETS Configuration TLV on
        the local system known to this agent"
    ::= { lldpXdot1dcbxLocETSConfiguration 1 }

lldpXdot1dcbxLocETSBasicConfigurationEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxLocETSBasicConfigurationEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Information about the IEEE 802.1 organizational defined
        ETS Configuration TLV LLDP extension."
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpXdot1dcbxLocETSBasicConfigurationTable 1 }

lldpXdot1dcbxLocETSBasicConfigurationEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSConCreditBasedShaperSupport TruthValue,

```

```

lldpXdot1dcbxLocETSTrafficClassesSupported
    LldpXdot1dcbxSupportedCapacity,
lldpXdot1dcbxLocETSTrafficClassesSupported    TruthValue
}

lldpXdot1dcbxLocETSTrafficClassesSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates if the credit-based shaper Traffic Selection
        Algorithm is supported on the local system."
    REFERENCE
        "D.2.9.4"
    ::= { lldpXdot1dcbxLocETSTrafficClassesSupportedEntry 1 }

lldpXdot1dcbxLocETSTrafficClassesSupported OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxSupportedCapacity
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates the number of traffic classes supported."
    REFERENCE
        "D.2.9.5"
    ::= { lldpXdot1dcbxLocETSTrafficClassesSupportedEntry 2 }

lldpXdot1dcbxLocETSTrafficClassesSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates if the local system is willing to accept the
        ETS configuration recommended by the remote system."
    REFERENCE
        "D.2.9.3"
    ::= { lldpXdot1dcbxLocETSTrafficClassesSupportedEntry 3 }

lldpXdot1dcbxLocETSTrafficClassesSupported OBJECT-TYPE
    SYNTAX      SEQUENCE OF
        LldpXdot1dcbxLocETSTrafficClassesSupportedEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "This table contains one row per priority. The entry in each
        row indicates the traffic class to which the priority is
        assigned."
    ::= { lldpXdot1dcbxLocETSTrafficClassesSupportedTable 2 }

lldpXdot1dcbxLocETSTrafficClassesSupportedEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxLocETSTrafficClassesSupportedEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Indicates a priority to traffic class assignment."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxLocETSTrafficClassesSupportedPriority
        }
    ::= { lldpXdot1dcbxLocETSTrafficClassesSupportedTable 1 }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

LldpXdot1dcbxLocETSTrafficClassPriorityAssignmentEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSTrafficClassPriority      IEEE8021PriorityValue,
    lldpXdot1dcbxLocETSTrafficClassPriorityClass
        LldpXdot1dcbxTrafficClassValue
}

LldpXdot1dcbxLocETSTrafficClassPriority OBJECT-TYPE
    SYNTAX      IEEE8021PriorityValue
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Indicates the priority that is assigned to a traffic
         class."
    REFERENCE
        "D.2.9.6"
    ::= { lldpXdot1dcbxLocETSTrafficClassPriorityAssignmentEntry 1 }

LldpXdot1dcbxLocETSTrafficClass OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates the traffic class to which this priority is
         to be assigned."
    REFERENCE
        "D.2.9.6"
    ::= { lldpXdot1dcbxLocETSTrafficClassPriorityAssignmentEntry 2 }

LldpXdot1dcbxLocETSTrafficClassBandwidthTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF
        LldpXdot1dcbxLocETSTrafficClassBandwidthEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "This table contains one row per traffic class. The
         entry in each row indicates the traffic class to
         which the bandwidth is assigned."
    ::= { lldpXdot1dcbxLocETSTrafficClassConfiguration 3 }

LldpXdot1dcbxLocETSTrafficClassBandwidthEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxLocETSTrafficClassBandwidthEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Indicates a traffic class to Bandwidth assignment."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxLocETSTrafficClass
        }
    ::= { lldpXdot1dcbxLocETSTrafficClassBandwidthTable 1 }

LldpXdot1dcbxLocETSTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxLocETSTrafficClassBandwidth
        LldpXdot1dcbxTrafficClassBandwidthValue
}

```

```

lldpXdot1dcbxLocETSTrafficClass OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Indicates the traffic class to
         which this bandwidth applies"
    REFERENCE
        "D.2.9.7"
    ::= { lldpXdot1dcbxLocETSTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxLocETSTrafficClassBandwidth OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxTrafficClassBandwidthValue
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates the bandwidth assigned to this traffic class."
    REFERENCE
        "D.2.9.7"
    ::= { lldpXdot1dcbxLocETSTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxLocETSTrafficSelectionAlgorithmTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF
                 LldpXdot1dcbxLocETSTrafficSelectionAlgorithmEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "This table contains one row per traffic class. The entry
         in each row indicates the traffic selection algorithm to be
         used by the traffic class."
    ::= { lldpXdot1dcbxLocETSTrafficSelectionAlgorithmTable 4 }

lldpXdot1dcbxLocETSTrafficSelectionAlgorithmEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxLocETSTrafficSelectionAlgorithmEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Indicates a traffic class to traffic selection algorithm
         assignment."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxLocETSTrafficClass
        }
    ::= { lldpXdot1dcbxLocETSTrafficSelectionAlgorithmTable 1 }

lldpXdot1dcbxLocETSTrafficSelectionAlgorithmEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxLocETSTrafficSelectionAlgorithm
        LldpXdot1dcbxTrafficSelectionAlgorithm
}

lldpXdot1dcbxLocETSTrafficClass OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Indicates the traffic class that is assigned to a traffic

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

        selection algorithm."
REFERENCE
    "D.2.9.8"
::= { lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxLocETSConTrafficSelectionAlgorithm OBJECT-TYPE
SYNTAX      LldpXdot1dcbxTrafficSelectionAlgorithm
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "Indicates the Traffic Selection Algorithm to which this
    traffic class is to be assigned."
REFERENCE
    "D.2.9.8"
::= { lldpXdot1dcbxLocETSConTrafficSelectionAlgorithmEntry 2 }

--
-- lldpXdot1dcbxLocETSRecommendationTable - Contains the information for
-- the ETS Recommendation TLV.
--
lldpXdot1dcbxLocETSReco OBJECT IDENTIFIER ::=
{ lldpXdot1dcbxLocalData 2 }

lldpXdot1dcbxLocETSRecoTrafficClassBandwidthTable OBJECT-TYPE
SYNTAX      SEQUENCE OF
            LldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic class to
    which the bandwidth is assigned."
::= { lldpXdot1dcbxLocETSReco 1 }

lldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry OBJECT-TYPE
SYNTAX      LldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Indicates a traffic class to Bandwidth assignment."
INDEX      {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxLocETSRecoTrafficClass
        }
::= { lldpXdot1dcbxLocETSRecoTrafficClassBandwidthTable 1 }

LldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxLocETSRecoTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxLocETSRecoTrafficClassBandwidth
        LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxLocETSRecoTrafficClass OBJECT-TYPE
SYNTAX      LldpXdot1dcbxTrafficClassValue
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Indicates the traffic class to

```

which this bandwidth applies"

REFERENCE

"D.2.10.3"

::= { lldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxLocETSRecoTrafficClassBandwidth OBJECT-TYPE

SYNTAX LldpXdot1dcbxTrafficClassBandwidthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Indicates the bandwidth assigned to this traffic class."

REFERENCE

"D.2.10.4"

::= { lldpXdot1dcbxLocETSRecoTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmTable OBJECT-TYPE

SYNTAX SEQUENCE OF

 LldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains one row per priority. The entry in each row indicates the traffic selection algorithm to be used by the traffic class."

::= { lldpXdot1dcbxLocETSReco 2 }

lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Indicates a priority to traffic selection algorithm assignment."

INDEX {

 lldpV2LocPortIfIndex,

 lldpXdot1dcbxLocETSRecoTSATrafficClass

 }

::= { lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmTable 1 }

lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry ::= SEQUENCE {

 lldpXdot1dcbxLocETSRecoTSATrafficClass

 LldpXdot1dcbxTrafficClassValue,

 lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm

 LldpXdot1dcbxTrafficSelectionAlgorithm

}

lldpXdot1dcbxLocETSRecoTSATrafficClass OBJECT-TYPE

SYNTAX LldpXdot1dcbxTrafficClassValue

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Indicates the traffic class that is assigned to a traffic selection algorithm."

REFERENCE

"D.2.10.5"

::= { lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm OBJECT-TYPE

SYNTAX LldpXdot1dcbxTrafficSelectionAlgorithm

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

MAX-ACCESS      read-only
STATUS          current
DESCRIPTION
    "Indicates the Traffic Selection Algorithm to which this
    traffic class is to be assigned."
REFERENCE
    "D.2.10.5"
::= { lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithmEntry 2 }

--
-- lldpXdot1dcbxLocPFCTable - Contains the information for the PFC
-- Configuration TLV.
--
lldpXdot1dcbxLocPFC OBJECT IDENTIFIER ::= { lldpXdot1dcbxLocalData 3 }

lldpXdot1dcbxLocPFCBasicTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxLocPFCBasicEntry
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per port for the IEEE 802.1
        organizationally defined LLDP PFC TLV on the local
        system known to this agent"
    ::= { lldpXdot1dcbxLocPFC 1 }

lldpXdot1dcbxLocPFCBasicEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxLocPFCBasicEntry
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "Information about the IEEE 802.1 organizational defined
        PFC TLV LLDP extension."
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpXdot1dcbxLocPFCBasicTable 1 }

LldpXdot1dcbxLocPFCBasicEntry ::= SEQUENCE {
    lldpXdot1dcbxLocPFCWilling      TruthValue,
    lldpXdot1dcbxLocPFCMBC         TruthValue,
    lldpXdot1dcbxLocPFCFCap        LldpXdot1dcbxSupportedCapacity
}

lldpXdot1dcbxLocPFCWilling OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "Indicates if the local system is willing to accept the
        PFC configuration of the remote system."
    REFERENCE
        "D.2.11.3"
    ::= { lldpXdot1dcbxLocPFCBasicEntry 1 }

lldpXdot1dcbxLocPFCMBC OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "Indicates if the local system is capable of bypassing
        MACsec processing when MACsec is disabled."

```

REFERENCE

"D.2.11.4"

::= { lldpXdot1dcbxLocPFCBasicEntry 2 }

lldpXdot1dcbxLocPFCap OBJECT-TYPE

SYNTAX LldpXdot1dcbxSupportedCapacity

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Indicates the number of traffic classes on the local device that may simultaneously have PFC enabled."

REFERENCE

"D.2.11.5"

::= { lldpXdot1dcbxLocPFCBasicEntry 3 }

lldpXdot1dcbxLocPFCEnableTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpXdot1dcbxLocPFCEnableEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains eight entries, one entry per priority, indicating if PFC is enabled on the corresponding priority."

::= { lldpXdot1dcbxLocPFC 2 }

lldpXdot1dcbxLocPFCEnableEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxLocPFCEnableEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Each entry indicates if PFC is enabled on the corresponding priority"

INDEX {

lldpV2LocPortIfIndex,

lldpXdot1dcbxLocPFCEnablePriority

}

::= { lldpXdot1dcbxLocPFCEnableTable 1 }

LldpXdot1dcbxLocPFCEnableEntry ::= SEQUENCE {

lldpXdot1dcbxLocPFCEnablePriority IEEE8021PriorityValue,

lldpXdot1dcbxLocPFCEnableEnabled TruthValue

}

lldpXdot1dcbxLocPFCEnablePriority OBJECT-TYPE

SYNTAX IEEE8021PriorityValue

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Priority for which PFC is enabled / disabled"

::= { lldpXdot1dcbxLocPFCEnableEntry 1 }

lldpXdot1dcbxLocPFCEnableEnabled OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Indicates if PFC is enabled on the corresponding priority"

REFERENCE

"D.2.11.6"

::= { lldpXdot1dcbxLocPFCEnableEntry 2 }

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```
--
-- lldpXdot1dcbxLocApplicationPriorityTable - Contains the information
-- for the Application Priority TLV.
--
```

```
lldpXdot1dcbxLocApplicationPriorityAppTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
                    LldpXdot1dcbxLocApplicationPriorityAppEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table containing entries indicating the priority to be used
        for a given application"
    ::= { lldpXdot1dcbxLocalData 4 }
```

```
lldpXdot1dcbxLocApplicationPriorityAppEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxLocApplicationPriorityAppEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Entry that indicates the priority to be used for a
        given application."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxLocApplicationPriorityAESelector,
            lldpXdot1dcbxLocApplicationPriorityAEProtocol
        }
    ::= { lldpXdot1dcbxLocApplicationPriorityAppTable 1 }
```

```
lldpXdot1dcbxLocApplicationPriorityAppEntry ::= SEQUENCE {
    lldpXdot1dcbxLocApplicationPriorityAESelector
        LldpXdot1dcbxAppSelector,
    lldpXdot1dcbxLocApplicationPriorityAEProtocol
        LldpXdot1dcbxAppProtocol,
    lldpXdot1dcbxLocApplicationPriorityAEPriority
        IEEE8021PriorityValue
}
```

```
lldpXdot1dcbxLocApplicationPriorityAESelector OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppSelector
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the contents of the protocol object
        (lldpXdot1dcbxLocApplicationPriorityAEProtocol)
        1: Ethertype
        2: Well Known Port number over TCP, or SCTP
        3: Well Known Port number over UDP, or DCCP
        4: Well Known Port number over TCP, SCTP, UDP, and DCCP"
    REFERENCE
        "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationPriorityAppEntry 1 }
```

```
lldpXdot1dcbxLocApplicationPriorityAEProtocol OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppProtocol
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "The protocol indicator of the type indicated by
```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

        lldpXdot1dcbxLocApplicationPriorityAESelector."
REFERENCE
    "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationPriorityAppEntry 2 }

lldpXdot1dcbxLocApplicationPriorityAEPriority OBJECT-TYPE
SYNTAX      IEEE8021PriorityValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The priority code point that should be used in
    frames transporting the protocol indicated by
    lldpXdot1dcbxLocApplicationPriorityAESelector and
    lldpXdot1dcbxLocApplicationPriorityAEProtocol"
REFERENCE
    "D.2.12.3"
    ::= { lldpXdot1dcbxLocApplicationPriorityAppEntry 3 }

-----
-- IEEE 802.1 - DCBX Remote System Information
-----

--
-- lldpXdot1dcbxRemETSConfigurationTable - Contains the information
-- for the remote system ETS Configuration TLV.
--
lldpXdot1dcbxRemETSConfiguration OBJECT IDENTIFIER
    ::= { lldpXdot1dcbxRemoteData 1 }

lldpXdot1dcbxRemETSBasicConfigurationTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpXdot1dcbxRemETSBasicConfigurationEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per port for the IEEE 802.1
    organizationally defined LLDP ETS Configuration TLV on
    the local system known to this agent"
    ::= { lldpXdot1dcbxRemETSConfiguration 1 }

lldpXdot1dcbxRemETSBasicConfigurationEntry OBJECT-TYPE
SYNTAX      LldpXdot1dcbxRemETSBasicConfigurationEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Information about the IEEE 802.1 organizational defined
    ETS Configuration TLV LLDP extension."
INDEX      {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex
        }
    ::= { lldpXdot1dcbxRemETSBasicConfigurationTable 1 }

LldpXdot1dcbxRemETSBasicConfigurationEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSConCreditBasedShaperSupport    TruthValue,
    lldpXdot1dcbxRemETSConTrafficClassesSupported
        LldpXdot1dcbxSupportedCapacity,

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

    lldpXdot1dcbxRemETSConWilling      TruthValue
}

lldpXdot1dcbxRemETSConCreditBasedShaperSupport OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates if the credit-based shaper Traffic Selection
        algorithm is supported on the remote system."
    REFERENCE
        "D.2.9.4"
    ::= { lldpXdot1dcbxRemETSTBasicConfigurationEntry 1 }

lldpXdot1dcbxRemETSConTrafficClassesSupported OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxSupportedCapacity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates the number of traffic classes supported."
    REFERENCE
        "D.2.9.5"
    ::= { lldpXdot1dcbxRemETSTBasicConfigurationEntry 2 }

lldpXdot1dcbxRemETSConWilling OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates if the remote system is willing to accept the
        ETS configuration recommended by the remote system."
    REFERENCE
        "D.2.9.3"
    ::= { lldpXdot1dcbxRemETSTBasicConfigurationEntry 3 }

lldpXdot1dcbxRemETSConPriorityAssignmentTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
        LldpXdot1dcbxRemETSConPriorityAssignmentEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per priority. The entry in
        each row indicates the traffic class to which the
        priority is assigned."
    ::= { lldpXdot1dcbxRemETSConfiguration 2 }

lldpXdot1dcbxRemETSConPriorityAssignmentEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxRemETSConPriorityAssignmentEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates a priority to traffic class assignment."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemETSConPriority
        }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

 ::= { lldpXdot1dcbxRemETSTrafficClassPriorityAssignmentTable 1 }

LldpXdot1dcbxRemETSTrafficClassPriorityAssignmentEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSTrafficClassPriorityValue IEEE8021PriorityValue,
    lldpXdot1dcbxRemETSTrafficClassPriorityTrafficClass
        LldpXdot1dcbxTrafficClassValue
}

lldpXdot1dcbxRemETSTrafficClassPriority OBJECT-TYPE
    SYNTAX IEEE8021PriorityValue
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "Indicates the priority that is assigned to a traffic
        class."
    REFERENCE
        "D.2.9.6"
    ::= { lldpXdot1dcbxRemETSTrafficClassPriorityAssignmentEntry 1 }

lldpXdot1dcbxRemETSTrafficClass OBJECT-TYPE
    SYNTAX LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "Indicates the traffic class to which this priority is
        to be assigned."
    REFERENCE
        "D.2.9.6"
    ::= { lldpXdot1dcbxRemETSTrafficClassPriorityAssignmentEntry 2 }

lldpXdot1dcbxRemETSTrafficClassBandwidthTable OBJECT-TYPE
    SYNTAX SEQUENCE OF
        LldpXdot1dcbxRemETSTrafficClassBandwidthEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains one row per traffic class. The
        entry in each row indicates the traffic class to
        which the bandwidth is assigned."
    ::= { lldpXdot1dcbxRemETSTrafficClassConfiguration 3 }

lldpXdot1dcbxRemETSTrafficClassBandwidthEntry OBJECT-TYPE
    SYNTAX LldpXdot1dcbxRemETSTrafficClassBandwidthEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "Indicates a traffic class to Bandwidth assignment."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemETSTrafficClass
        }
    ::= { lldpXdot1dcbxRemETSTrafficClassBandwidthTable 1 }

LldpXdot1dcbxRemETSTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSTrafficClass
        LldpXdot1dcbxTrafficClassValue,

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemETSTrafficClassBandwidth
    LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxRemETSTrafficClass OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the traffic class to
         which this bandwidth applies"
    REFERENCE
        "D.2.9.7"
    ::= { lldpXdot1dcbxRemETSTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxRemETSTrafficClassBandwidth OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassBandwidthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates the bandwidth assigned to this traffic class."
    REFERENCE
        "D.2.9.7"
    ::= { lldpXdot1dcbxRemETSTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxRemETSTrafficSelectionAlgorithmTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
                    LldpXdot1dcbxRemETSTrafficSelectionAlgorithmEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per traffic class. The
         entry in each row indicates the traffic selection
         algorithm to be used by the traffic class."
    ::= { lldpXdot1dcbxRemETSTrafficConfiguration 4 }

lldpXdot1dcbxRemETSTrafficSelectionAlgorithmEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxRemETSTrafficSelectionAlgorithmEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates a traffic class to traffic selection
         algorithm assignment."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemETSTrafficClass
        }
    ::= { lldpXdot1dcbxRemETSTrafficSelectionAlgorithmTable 1 }

LldpXdot1dcbxRemETSTrafficSelectionAlgorithmEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxRemETSTrafficSelectionAlgorithm
        LldpXdot1dcbxTrafficSelectionAlgorithm
}

```

```

lldpXdot1dcbxRemETSConTSATrafficClass OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the traffic class that is assigned to a traffic
        selection algorithm."
    REFERENCE
        "D.2.9.8"
    ::= { lldpXdot1dcbxRemETSConTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxRemETSConTrafficSelectionAlgorithm OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficSelectionAlgorithm
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates the Traffic Selection Algorithm to which this
        traffic class is to be assigned."
    REFERENCE
        "D.2.9.8"
    ::= { lldpXdot1dcbxRemETSConTrafficSelectionAlgorithmEntry 2 }

--
-- lldpXdot1dcbxRemETSRecommendationTable - Contains the information for
-- the remote system ETS Recommendation TLV.
--
lldpXdot1dcbxRemETSReco OBJECT IDENTIFIER ::=
    { lldpXdot1dcbxRemoteData 2 }

lldpXdot1dcbxRemETSRecoTrafficClassBandwidthTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
                    LldpXdot1dcbxRemETSRecoTrafficClassBandwidthEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per traffic class. The
        entry in each row indicates the traffic class to
        which the bandwidth is assigned."
    ::= { lldpXdot1dcbxRemETSReco 1 }

lldpXdot1dcbxRemETSRecoTrafficClassBandwidthEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxRemETSRecoTrafficClassBandwidthEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates a traffic class to Bandwidth assignment."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemETSRecoTrafficClass
        }
    ::= { lldpXdot1dcbxRemETSRecoTrafficClassBandwidthTable 1 }

lldpXdot1dcbxRemETSRecoTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSRecoTrafficClass
    LldpXdot1dcbxTrafficClassValue,

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemETSRecoTrafficClassBandwidth
    LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxRemETSRecoTrafficClass OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the traffic class to
         which this bandwidth applies"
    REFERENCE
        "D.2.10.4"
    ::= { lldpXdot1dcbxRemETSRecoTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxRemETSRecoTrafficClassBandwidth OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassBandwidthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates the bandwidth assigned to this traffic class."
    REFERENCE
        "D.2.10.4"
    ::= { lldpXdot1dcbxRemETSRecoTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
                    LldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per traffic class. The
         entry in each row indicates the traffic selction
         algorithm to be used by the priority."
    ::= { lldpXdot1dcbxRemETSReco 2 }

lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates a priority to traffic selection algorithm
         assignment."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemETSRecoTSATrafficClass
        }
    ::= { lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmTable 1 }

LldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmEntry ::= SEQUENCE {
    lldpXdot1dcbxRemETSRecoTSATrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithm
        LldpXdot1dcbxTrafficSelectionAlgorithm
}

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemETSRecoTSATrafficClass OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the traffic class that is assigned to a traffic
        selection algorithm."
    REFERENCE
        "D.2.10.5"
    ::= { lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithm OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficSelectionAlgorithm
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates the Traffic Selection Algorithm to which this
        traffic class is to be assigned."
    REFERENCE
        "D.2.10.5"
    ::= { lldpXdot1dcbxRemETSRecoTrafficSelectionAlgorithmEntry 2 }

--
-- lldpXdot1dcbxRemPFCTable - Contains the information for the remote
-- system PFC TLV.
--
lldpXdot1dcbxRemPFC OBJECT IDENTIFIER ::= { lldpXdot1dcbxRemoteData 3 }

lldpXdot1dcbxRemPFCBasicTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF LldpXdot1dcbxRemPFCBasicEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per port for the IEEE 802.1
        organizationally defined LLDP PFC TLV on the local
        system known to this agent"
    ::= { lldpXdot1dcbxRemPFC 1 }

lldpXdot1dcbxRemPFCBasicEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxRemPFCBasicEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Information about the IEEE 802.1 organizational defined
        PFC TLV LLDP extension."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex
        }
    ::= { lldpXdot1dcbxRemPFCBasicTable 1 }

LldpXdot1dcbxRemPFCBasicEntry ::= SEQUENCE {
    lldpXdot1dcbxRemPFCWilling      TruthValue,
    lldpXdot1dcbxRemPFCMBC          TruthValue,
    lldpXdot1dcbxRemPFCPCap        LldpXdot1dcbxSupportedCapacity
}

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemPFCWilling OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates if the remote system is willing to accept the
        PFC configuration of the local system."
    REFERENCE
        "D.2.11.3"
    ::= { lldpXdot1dcbxRemPFCBasicEntry 1}

lldpXdot1dcbxRemPFCMBC OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates if the remote system is capable of bypassing
        MACsec processing when MACsec is disabled."
    REFERENCE
        "D.2.11.4"
    ::= { lldpXdot1dcbxRemPFCBasicEntry 2}

lldpXdot1dcbxRemPFCCap OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxSupportedCapacity
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        "Indicates the number of traffic classes on the remote device
        that may simultaneously have PFC enabled."
    REFERENCE
        "D.2.11.5"
    ::= { lldpXdot1dcbxRemPFCBasicEntry 3}

lldpXdot1dcbxRemPFCEnableTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpXdot1dcbxRemPFCEnableEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "This table contains eight entries, one entry per priority,
        indicating if PFC is enabled on the corresponding priority."
    ::= { lldpXdot1dcbxRemPFC 2 }

lldpXdot1dcbxRemPFCEnableEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxRemPFCEnableEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        "Each entry indicates if PFC is enabled on the
        corresponding priority"
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemPFCEnablePriority
        }
    ::= { lldpXdot1dcbxRemPFCEnableTable 1 }

lldpXdot1dcbxRemPFCEnableEntry ::= SEQUENCE {

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemPFCEnablePriority    IEEE8021PriorityValue,
lldpXdot1dcbxRemPFCEnableEnabled    TruthValue
}

lldpXdot1dcbxRemPFCEnablePriority OBJECT-TYPE
    SYNTAX            IEEE8021PriorityValue
    MAX-ACCESS        not-accessible
    STATUS            current
    DESCRIPTION
        "Priority for which PFC is enabled / disabled"
    ::= { lldpXdot1dcbxRemPFCEnableEntry 1 }

lldpXdot1dcbxRemPFCEnableEnabled OBJECT-TYPE
    SYNTAX            TruthValue
    MAX-ACCESS        read-only
    STATUS            current
    DESCRIPTION
        "Indicates if PFC is enabled on the corresponding priority"
    REFERENCE
        "D.2.11.6"
    ::= { lldpXdot1dcbxRemPFCEnableEntry 2 }

--
-- lldpXdot1dcbxRemApplicationPriorityTable - Contains the information
-- for the remote system Application Priority TLV.
--

lldpXdot1dcbxRemApplicationPriorityAppTable OBJECT-TYPE
    SYNTAX            SEQUENCE OF
                        LldpXdot1dcbxRemApplicationPriorityAppEntry
    MAX-ACCESS        not-accessible
    STATUS            current
    DESCRIPTION
        "Table containing entries indicating the priority to be used
        for a given application"
    ::= { lldpXdot1dcbxRemoteData 4 }

lldpXdot1dcbxRemApplicationPriorityAppEntry OBJECT-TYPE
    SYNTAX            LldpXdot1dcbxRemApplicationPriorityAppEntry
    MAX-ACCESS        not-accessible
    STATUS            current
    DESCRIPTION
        "Entry that indicates the priority to be used for a
        given application."
    INDEX
        {
            lldpV2RemTimeMark,
            lldpV2RemLocalIfIndex,
            lldpV2RemLocalDestMACAddress,
            lldpV2RemIndex,
            lldpXdot1dcbxRemApplicationPriorityAESelector,
            lldpXdot1dcbxRemApplicationPriorityAEProtocol
        }
    ::= { lldpXdot1dcbxRemApplicationPriorityAppTable 1 }

LldpXdot1dcbxRemApplicationPriorityAppEntry ::= SEQUENCE {
    lldpXdot1dcbxRemApplicationPriorityAESelector
        LldpXdot1dcbxAppSelector,
    lldpXdot1dcbxRemApplicationPriorityAEProtocol
        LldpXdot1dcbxAppProtocol,

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemApplicationPriorityAEPriority
    IEEE8021PriorityValue
}

lldpXdot1dcbxRemApplicationPriorityAESelector OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppSelector
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the contents of the protocol object
        (lldpXdot1dcbxRemApplicationPriorityAEProtocol)
        1: Ethertype
        2: Well Known Port number over TCP, or SCTP
        3: Well Known Port number over UDP, or DCCP
        4: Well Known Port number over TCP, SCTP, UDP, and DCCP"
    REFERENCE
        "D.2.12.3"
    ::= { lldpXdot1dcbxRemApplicationPriorityAppEntry 1 }

lldpXdot1dcbxRemApplicationPriorityAEProtocol OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppProtocol
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "The protocol indicator of the type indicated by
        lldpXdot1dcbxRemApplicationPriorityAESelector."
    REFERENCE
        "D.2.12.3"
    ::= { lldpXdot1dcbxRemApplicationPriorityAppEntry 2 }

lldpXdot1dcbxRemApplicationPriorityAEPriority OBJECT-TYPE
    SYNTAX          IEEE8021PriorityValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "The priority code point that should be used in
        frames transporting the protocol indicated by
        lldpXdot1dcbxRemApplicationPriorityAESelector and
        lldpXdot1dcbxRemApplicationPriorityAEProtocol"
    REFERENCE
        "D.2.12.3"
    ::= { lldpXdot1dcbxRemApplicationPriorityAppEntry 3 }

-----
-- IEEE 802.1 - DCBX Administrative Information
-----

--
-- lldpXdot1dcbxAdminETSConfigurationTable - Contains the information
-- for the ETS Configuration TLV.
--
lldpXdot1dcbxAdminETSConfiguration OBJECT IDENTIFIER
    ::= { lldpXdot1dcbxAdminData 1 }

lldpXdot1dcbxAdminETSConfigurationTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
                    LldpXdot1dcbxAdminETSConfigurationEntry
    MAX-ACCESS      not-accessible
    STATUS          current

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

DESCRIPTION

"This table contains one row per port for the IEEE 802.1 organizationally defined LLDP ETS Configuration TLV on the local system known to this agent"

::= { lldpXdot1dcbxAdminETSConfiguration 1 }

lldpXdot1dcbxAdminETSBasicConfigurationEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxAdminETSBasicConfigurationEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Information about the IEEE 802.1 organizational defined ETS Configuration TLV LLDP extension."

INDEX { lldpV2LocPortIfIndex }

::= { lldpXdot1dcbxAdminETSBasicConfigurationTable 1 }

lldpXdot1dcbxAdminETSBasicConfigurationEntry ::= SEQUENCE {

lldpXdot1dcbxAdminETSConCreditBasedShaperSupport TruthValue,

lldpXdot1dcbxAdminETSConTrafficClassesSupported

LldpXdot1dcbxSupportedCapacity,

lldpXdot1dcbxAdminETSConWilling TruthValue

}

lldpXdot1dcbxAdminETSConCreditBasedShaperSupport OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Indicates support for the credit-based shaper Traffic Selection Algorithm."

REFERENCE

"D.2.9.4"

::= { lldpXdot1dcbxAdminETSBasicConfigurationEntry 1 }

lldpXdot1dcbxAdminETSConTrafficClassesSupported OBJECT-TYPE

SYNTAX LldpXdot1dcbxSupportedCapacity

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Indicates the number of traffic classes supported."

REFERENCE

"D.2.9.5"

::= { lldpXdot1dcbxAdminETSBasicConfigurationEntry 2 }

lldpXdot1dcbxAdminETSConWilling OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates if the local system is willing to accept the ETS configuration recommended by the remote system."

REFERENCE

"D.2.9.3"

DEFVAL { false }

::= { lldpXdot1dcbxAdminETSBasicConfigurationEntry 3 }

lldpXdot1dcbxAdminETSConPriorityAssignmentTable OBJECT-TYPE

SYNTAX SEQUENCE OF

LldpXdot1dcbxAdminETSConPriorityAssignmentEntry

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "This table contains one row per priority. The entry in each
    row indicates the traffic class to which the priority is
    assigned."
::= { lldpXdot1dcbxAdminETSTrafficClassTable 2 }

lldpXdot1dcbxAdminETSTrafficClassTable OBJECT-TYPE
SYNTAX          SequenceOf LldpXdot1dcbxAdminETSTrafficClassEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates a priority to traffic class assignment."
INDEX
    {
        lldpV2LocPortIfIndex,
        lldpXdot1dcbxAdminETSTrafficClass
    }
::= { lldpXdot1dcbxAdminETSTrafficClassTable 1 }

lldpXdot1dcbxAdminETSTrafficClassEntry ::= SEQUENCE {
    lldpXdot1dcbxAdminETSTrafficClassIndex      IEEE8021PriorityValue,
    lldpXdot1dcbxAdminETSTrafficClassTrafficClass
        LldpXdot1dcbxTrafficClassValue
}

lldpXdot1dcbxAdminETSTrafficClassEntry OBJECT-TYPE
SYNTAX          IEEE8021PriorityValue
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates the priority that is assigned to a traffic
    class."
REFERENCE
    "D.2.9.6"
::= { lldpXdot1dcbxAdminETSTrafficClassEntry 1 }

lldpXdot1dcbxAdminETSTrafficClassEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS      read-write
STATUS          current
DESCRIPTION
    "Indicates the traffic class to which this priority is
    to be assigned."
REFERENCE
    "D.2.9.6"
DEFVAL          { 0 }
::= { lldpXdot1dcbxAdminETSTrafficClassEntry 2 }

lldpXdot1dcbxAdminETSTrafficClassBandwidthTable OBJECT-TYPE
SYNTAX          SequenceOf LldpXdot1dcbxAdminETSTrafficClassBandwidthEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic class to
    which the bandwidth is assigned."
::= { lldpXdot1dcbxAdminETSTrafficClassBandwidthTable 3 }

```

```

lldpXdot1dcbxAdminETSTrafficClassBandwidthEntry OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxAdminETSTrafficClassBandwidthEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Indicates a traffic class to Bandwidth assignment."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxAdminETSTrafficClass
        }
    ::= { lldpXdot1dcbxAdminETSTrafficClassBandwidthTable 1 }

LldpXdot1dcbxAdminETSTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxAdminETSTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxAdminETSTrafficClassBandwidth
        LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxAdminETSTrafficClass OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Indicates the traffic class to
        which this bandwidth applies"
    REFERENCE
        "D.2.9.7"
    ::= { lldpXdot1dcbxAdminETSTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxAdminETSTrafficClassBandwidth OBJECT-TYPE
    SYNTAX      LldpXdot1dcbxTrafficClassBandwidthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "Indicates the bandwidth assigned to this traffic class.
        The sum of the bandwidths assigned to a given port is
        required at all times to equal 100. An operation that
        attempts to change this table such that the bandwidth
        entires do not total 100 shall be rejected. An implication
        of this is that modification of this table requires that
        multiple set operations be included in a single SNMP PDU,
        commonly referred to as an MSET operation, to perform
        simultaneous set operations to keep the sum at 100. Any
        attempt to change a single entry in this table will result
        in the operation being rejected since entries in the
        table referring to the given port will no longer
        sum to 100."
    REFERENCE
        "D.2.9.7"
    ::= { lldpXdot1dcbxAdminETSTrafficClassBandwidthEntry 2 }

lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF
        LldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION

```

IEEE Std 802.1Q™-2014/Cor 1-2015
 IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
 Corrigendum 1: Technical and editorial corrections

"This table contains one row per traffic class. The entry in each row indicates the traffic selection algorithm to be used by the priority."

::= { lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry 4 }

lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry OBJECT-TYPE
 SYNTAX LldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION
 "Indicates a traffic class to traffic selection algorithm assignment."
 INDEX {
 lldpV2LocPortIfIndex,
 lldpXdot1dcbxAdminETSTrafficClass
 }
 ::= { lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmTable 1 }

lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry ::= SEQUENCE {
 lldpXdot1dcbxAdminETSTrafficClass
 LldpXdot1dcbxTrafficClassValue,
 lldpXdot1dcbxAdminETSTrafficSelectionAlgorithm
 LldpXdot1dcbxTrafficSelectionAlgorithm
}

lldpXdot1dcbxAdminETSTrafficClass OBJECT-TYPE
 SYNTAX LldpXdot1dcbxTrafficClassValue
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION
 "Indicates the traffic class that is assigned to a traffic selection algorithm."
 REFERENCE
 "D.2.9.8"
 ::= { lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxAdminETSTrafficSelectionAlgorithm OBJECT-TYPE
 SYNTAX LldpXdot1dcbxTrafficSelectionAlgorithm
 MAX-ACCESS read-write
 STATUS current
 DESCRIPTION
 "Indicates the Traffic Selection Algorithm to which this traffic class is to be assigned."
 REFERENCE
 "D.2.9.8"
 ::= { lldpXdot1dcbxAdminETSTrafficSelectionAlgorithmEntry 2 }

--
 -- lldpXdot1dcbxAdminETSRecommendationTable - Contains the information
 -- for the ETS Recommendation TLV.
 --

lldpXdot1dcbxAdminETSReco OBJECT IDENTIFIER ::= { lldpXdot1dcbxAdminData 2 }

lldpXdot1dcbxAdminETSRecoTrafficClassBandwidthTable OBJECT-TYPE
 SYNTAX SEQUENCE OF
 LldpXdot1dcbxAdminETSRecoTrafficClassBandwidthEntry
 MAX-ACCESS not-accessible

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

STATUS          current
DESCRIPTION
    "This table contains one row per traffic class. The
    entry in each row indicates the traffic class to
    which the bandwidth is assigned."
 ::= { lldpXdot1dcbxAdminETSReco 1 }

lldpXdot1dcbxAdminETSRecoTrafficClassBandwidthEntry OBJECT-TYPE
SYNTAX          LldpXdot1dcbxAdminETSRecoTrafficClassBandwidthEntry
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates a traffic class to Bandwidth assignment."
INDEX
    {
        lldpV2LocPortIfIndex,
        lldpXdot1dcbxAdminETSRecoTrafficClass
    }
 ::= { lldpXdot1dcbxAdminETSRecoTrafficClassBandwidthTable 1 }

LldpXdot1dcbxAdminETSRecoTrafficClassBandwidthEntry ::= SEQUENCE {
    lldpXdot1dcbxAdminETSRecoTrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxAdminETSRecoTrafficClassBandwidth
        LldpXdot1dcbxTrafficClassBandwidthValue
}

lldpXdot1dcbxAdminETSRecoTrafficClass OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassValue
MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Indicates the traffic class to
    which this bandwidth applies"
REFERENCE
    "D.2.10.4"
 ::= { lldpXdot1dcbxAdminETSRecoTrafficClassBandwidthEntry 1 }

lldpXdot1dcbxAdminETSRecoTrafficClassBandwidth OBJECT-TYPE
SYNTAX          LldpXdot1dcbxTrafficClassBandwidthValue
MAX-ACCESS      read-write
STATUS          current
DESCRIPTION
    "Indicates the bandwidth assigned to this traffic class.
    The sum of the bandwidths assigned to a given port is
    required at all times to equal 100. An operation that
    attempts to change this table such that the bandwidth
    entries do not total 100 shall be rejected. An implication
    of this is that modification of this table requires that
    multiple set operations be included in a single SNMP PDU,
    commonly referred to as an MSET operation, to perform
    simultaneous set operations to keep the sum at 100. Any
    attempt to change a single entry in this table will result
    in the operation being rejected since entries in the
    table referring to the given port will no longer
    sum to 100."

REFERENCE
    "D.2.10.4"
 ::= { lldpXdot1dcbxAdminETSRecoTrafficClassBandwidthEntry 2 }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
        LldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per traffic class. The entry
        in each row indicates the traffic selection algorithm to
        be used by the traffic class."
    ::= { lldpXdot1dcbxAdminETSReco 2 }

lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates a traffic class to traffic selection
        algorithm assignment."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxAdminETSRecoTSATrafficClass
        }
    ::= { lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmTable 1 }

lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmEntry ::= SEQUENCE {
    lldpXdot1dcbxAdminETSRecoTSATrafficClass
        LldpXdot1dcbxTrafficClassValue,
    lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithm
        LldpXdot1dcbxTrafficSelectionAlgorithm
}

lldpXdot1dcbxAdminETSRecoTSATrafficClass OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficClassValue
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the traffic class that is assigned to a traffic
        selection algorithm."
    REFERENCE
        "D.2.10.5"
    ::= { lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmEntry 1 }

lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithm OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxTrafficSelectionAlgorithm
    MAX-ACCESS      read-write
    STATUS          current
    DESCRIPTION
        "Indicates the Traffic Selection Algorithm to which this
        traffic class is to be assigned."
    REFERENCE
        "D.2.10.5"
    ::= { lldpXdot1dcbxAdminETSRecoTrafficSelectionAlgorithmEntry 2 }

--
-- lldpXdot1dcbxAdminPFCTable - Contains the information for the PFC
-- Configuration TLV.
--
lldpXdot1dcbxAdminPFC OBJECT IDENTIFIER ::= { lldpXdot1dcbxAdminData 3 }

```

```

lldpXdot1dcbxAdminPFCBasicTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF LldpXdot1dcbxAdminPFCBasicEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "This table contains one row per port for the IEEE 802.1
        organizationally defined LLDP PFC TLV on the local
        system known to this agent"
    ::= { lldpXdot1dcbxAdminPFC 1 }

lldpXdot1dcbxAdminPFCBasicEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAdminPFCBasicEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Information about the IEEE 802.1 organizational defined
        PFC TLV LLDP extension."
    INDEX           { lldpV2LocPortIfIndex }
    ::= { lldpXdot1dcbxAdminPFCBasicTable 1 }

LldpXdot1dcbxAdminPFCBasicEntry ::= SEQUENCE {
    lldpXdot1dcbxAdminPFCWilling      TruthValue,
    lldpXdot1dcbxAdminPFCMBC         TruthValue,
    lldpXdot1dcbxAdminPFCCap         LldpXdot1dcbxSupportedCapacity
}

lldpXdot1dcbxAdminPFCWilling OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-write
    STATUS          current
    DESCRIPTION
        "Indicates if the local system is willing to accept the
        PFC configuration of the remote system."
    REFERENCE
        "D.2.11.3"
    DEFVAL          { false }
    ::= { lldpXdot1dcbxAdminPFCBasicEntry 1}

lldpXdot1dcbxAdminPFCMBC OBJECT-TYPE
    SYNTAX          TruthValue
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates if the local system is capable of bypassing
        MACsec processing when MACsec is disabled."
    REFERENCE
        "D.2.11.4"
    ::= { lldpXdot1dcbxAdminPFCBasicEntry 2}

lldpXdot1dcbxAdminPFCCap OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxSupportedCapacity
    MAX-ACCESS      read-only
    STATUS          current
    DESCRIPTION
        "Indicates the number of traffic classes on the local device
        that may simultaneously have PFC enabled.

        Note that this typically indicates a physical limitation of the

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

device. However, some devices may allow this parameter to be administratively configured, in which case the MAX-ACCESS should be changed to read-write with and an appropriate DEFVAL added."

REFERENCE

"D.2.11.5"

::= { lldpXdot1dcbxAdminPFCBasicEntry 3 }

lldpXdot1dcbxAdminPFCEnableTable OBJECT-TYPE

SYNTAX SEQUENCE OF LldpXdot1dcbxAdminPFCEnableEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains eight entries, one entry per priority, indicating if PFC is enabled on the corresponding priority."

::= { lldpXdot1dcbxAdminPFC 2 }

lldpXdot1dcbxAdminPFCEnableEntry OBJECT-TYPE

SYNTAX LldpXdot1dcbxAdminPFCEnableEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Each entry indicates if PFC is enabled on the corresponding priority"

INDEX {

lldpV2LocPortIfIndex,

lldpXdot1dcbxAdminPFCEnablePriority

}

::= { lldpXdot1dcbxAdminPFCEnableTable 1 }

LldpXdot1dcbxAdminPFCEnableEntry ::= SEQUENCE {

lldpXdot1dcbxAdminPFCEnablePriority IEEE8021PriorityValue,

lldpXdot1dcbxAdminPFCEnableEnabled TruthValue

}

lldpXdot1dcbxAdminPFCEnablePriority OBJECT-TYPE

SYNTAX IEEE8021PriorityValue

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Priority for which PFC is enabled / disabled"

::= { lldpXdot1dcbxAdminPFCEnableEntry 1 }

lldpXdot1dcbxAdminPFCEnableEnabled OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates if PFC is enabled on the corresponding priority"

REFERENCE

"D.2.11.6"

DEFVAL { false }

::= { lldpXdot1dcbxAdminPFCEnableEntry 2 }

--

-- lldpXdot1dcbxAdminApplicationPriorityTable - Contains the

-- information for the Application Priority TLV.

--

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxAdminApplicationPriorityAppTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF
        LldpXdot1dcbxAdminApplicationPriorityAppEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Table containing entries indicating the priority to be used
        for a given application"
    ::= { lldpXdot1dcbxAdminData 4 }

lldpXdot1dcbxAdminApplicationPriorityAppEntry OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAdminApplicationPriorityAppEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Entry that indicates the priority to be used for a
        given application."
    INDEX
        {
            lldpV2LocPortIfIndex,
            lldpXdot1dcbxAdminApplicationPriorityAESelector,
            lldpXdot1dcbxAdminApplicationPriorityAEProtocol
        }
    ::= { lldpXdot1dcbxAdminApplicationPriorityAppTable 1 }

lldpXdot1dcbxAdminApplicationPriorityAppEntry ::= SEQUENCE {
    lldpXdot1dcbxAdminApplicationPriorityAESelector
        LldpXdot1dcbxAppSelector,
    lldpXdot1dcbxAdminApplicationPriorityAEProtocol
        LldpXdot1dcbxAppProtocol,
    lldpXdot1dcbxAdminApplicationPriorityAEPriority
        IEEE8021PriorityValue
}

lldpXdot1dcbxAdminApplicationPriorityAESelector OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppSelector
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "Indicates the contents of the protocol object
        (lldpXdot1dcbxAdminApplicationPriorityAEProtocol)
        1: Ethertype
        2: Well Known Port number over TCP, or SCTP
        3: Well Known Port number over UDP, or DCCP
        4: Well Known Port number over TCP, SCTP, UDP, and DCCP"
    REFERENCE
        "D.2.11.6"
    ::= { lldpXdot1dcbxAdminApplicationPriorityAppEntry 1 }

lldpXdot1dcbxAdminApplicationPriorityAEProtocol OBJECT-TYPE
    SYNTAX          LldpXdot1dcbxAppProtocol
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "The protocol indicator of the type indicated by
        lldpXdot1dcbxAdminApplicationPriorityAESelector."
    REFERENCE
        "D.2.11.6"
    ::= { lldpXdot1dcbxAdminApplicationPriorityAppEntry 2 }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxAdminApplicationPriorityAEPriority OBJECT-TYPE
    SYNTAX          IEEE8021PriorityValue
    MAX-ACCESS      read-create
    STATUS          current
    DESCRIPTION
        "The priority code point that should be used in
        frames transporting the protocol indicated by
        lldpXdot1dcbxAdminApplicationPriorityAESelector and
        lldpXdot1dcbxAdminApplicationPriorityAEProtocol"
    REFERENCE
        "D.2.11.6"
    ::= { lldpXdot1dcbxAdminApplicationPriorityAppEntry 3 }

-----
-- IEEE 802.1 - DCBX Conformance Information
-----

lldpXdot1dcbxConformance OBJECT IDENTIFIER ::= { lldpV2Xdot1MIB 6 }
lldpXdot1dcbxCompliances
    OBJECT IDENTIFIER ::= { lldpXdot1dcbxConformance 1 }
lldpXdot1dcbxGroups
    OBJECT IDENTIFIER ::= { lldpXdot1dcbxConformance 2 }

--
-- Compliance Statements
--

lldpXdot1dcbxCompliance MODULE-COMPLIANCE
    STATUS          current
    DESCRIPTION
        "A compliance statement for SNMP entities that implement
        the IEEE 802.1 organizationally defined DCBX LLDP
        extension MIB.

        This group is mandatory for agents which implement Enhanced
        Transmission Selection."
    MODULE          -- this module
        MANDATORY-GROUPS { lldpXdot1dcbxETSGroup,
                           lldpXdot1dcbxPFCGroup,
                           lldpXdot1dcbxApplicationPriorityGroup,
                           ifGeneralInformationGroup
                           }
    ::= { lldpXdot1dcbxCompliances 1 }

--
-- MIB Groupings
--

lldpXdot1dcbxETSGroup OBJECT-GROUP
    OBJECTS {
        lldpXdot1dcbxConfigETSConfigurationTxEnable,
        lldpXdot1dcbxConfigETSRecommendationTxEnable,
        lldpXdot1dcbxLocETSConCreditBasedShaperSupport,
        lldpXdot1dcbxLocETSConTrafficClassesSupported,
        lldpXdot1dcbxLocETSConWilling,
        lldpXdot1dcbxLocETSConPriTrafficClass,
        lldpXdot1dcbxLocETSConTrafficClassBandwidth,
        lldpXdot1dcbxLocETSConTrafficSelectionAlgorithm,
        lldpXdot1dcbxLocETSRecoTrafficClassBandwidth,
        lldpXdot1dcbxLocETSRecoTrafficSelectionAlgorithm,
    }

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

```

lldpXdot1dcbxRemETSTConCreditBasedShaperSupport,
lldpXdot1dcbxRemETSTConTrafficClassesSupported,
lldpXdot1dcbxRemETSTConWilling,
lldpXdot1dcbxRemETSTConPriTrafficClass,
lldpXdot1dcbxRemETSTConTrafficClassBandwidth,
lldpXdot1dcbxRemETSTConTrafficSelectionAlgorithm,
lldpXdot1dcbxRemETSTRecoTrafficClassBandwidth,
lldpXdot1dcbxRemETSTRecoTrafficSelectionAlgorithm,
lldpXdot1dcbxAdminETSTConCreditBasedShaperSupport,
lldpXdot1dcbxAdminETSTConTrafficClassesSupported,
lldpXdot1dcbxAdminETSTConWilling,
lldpXdot1dcbxAdminETSTConPriTrafficClass,
lldpXdot1dcbxAdminETSTConTrafficClassBandwidth,
lldpXdot1dcbxAdminETSTConTrafficSelectionAlgorithm,
lldpXdot1dcbxAdminETSTRecoTrafficClassBandwidth,
lldpXdot1dcbxAdminETSTRecoTrafficSelectionAlgorithm
}
STATUS current
DESCRIPTION
    "The collection of objects used for Enhanced
    Transmission Selection."
::= { lldpXdot1dcbxGroups 1 }

lldpXdot1dcbxPFCGroup OBJECT-GROUP
OBJECTS {
    lldpXdot1dcbxConfigPFCTxEnable,
    lldpXdot1dcbxLocPFCWilling,
    lldpXdot1dcbxLocPFCMBC,
    lldpXdot1dcbxLocPFCCap,
    lldpXdot1dcbxLocPFCEnableEnabled,
    lldpXdot1dcbxRemPFCWilling,
    lldpXdot1dcbxRemPFCMBC,
    lldpXdot1dcbxRemPFCCap,
    lldpXdot1dcbxRemPFCEnableEnabled,
    lldpXdot1dcbxAdminPFCWilling,
    lldpXdot1dcbxAdminPFCMBC,
    lldpXdot1dcbxAdminPFCCap,
    lldpXdot1dcbxAdminPFCEnableEnabled
}
STATUS current
DESCRIPTION
    "The collection of objects used for Priority-
    base Flow Control."
::= { lldpXdot1dcbxGroups 2 }

lldpXdot1dcbxApplicationPriorityGroup OBJECT-GROUP
OBJECTS {
    lldpXdot1dcbxConfigApplicationPriorityTxEnable,
    lldpXdot1dcbxLocApplicationPriorityAEPriority,
    lldpXdot1dcbxRemApplicationPriorityAEPriority,
    lldpXdot1dcbxAdminApplicationPriorityAEPriority
}
STATUS current
DESCRIPTION
    "The collection of objects used for Application
    priority."
::= { lldpXdot1dcbxGroups 3 }
END

```

IEEE Std 802.1Q™-2014/Cor 1-2015
IEEE Standard for Local and Metropolitan Area Networks—Bridges and Bridged Networks—
Corrigendum 1: Technical and editorial corrections

Annex Q

(informative)

Bibliography

Change bibliography entry [B6] as follows and update all internal references to IEEE Std 802.1AE accordingly:

[B6] IEEE Std 802.1AE™-~~2006~~, IEEE Standard for Media Access Control (MAC) Security.

