

**Elektromagnetiline ühilduvus. Osa 6-2: Erialased
põhistandardid. Häiringukindlus
tööstuskeskkondades**

Electromagnetic compatibility (EMC) - Part 6-2:
Generic standards – Immunity for industrial
environments

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

Käesolev Eesti standard EVS-EN 61000-6-2:2006 sisaldab Euroopa standardi EN 61000-6-2:2005+AC:2005 ingliskeelset teksti.

Standard on kinnitatud Eesti Standardikeskuse 27.09.2005 käskkirjaga ja jõustub sellekohase teate avaldamisel EVS Teatajas.

Euroopa standardimisorganisatsioonide poolt rahvuslikele liikmetele Euroopa standardi teksti kättesaadavaks tegemise kuupäev on 26.08.2005.

Standard on kättesaadav Eesti standardiorganisatsioonist.

This Estonian standard EVS-EN 61000-6-2:2006 consists of the English text of the European standard EN 61000-6-2:2005+AC:2005.

This standard is ratified with the order of Estonian Centre for Standardisation dated 27.09.2005 and is endorsed with the notification published in the official bulletin of the Estonian national standardisation organisation.

Date of Availability of the European standard text 26.08.2005.

The standard is available from Estonian standardisation organisation.

ICS 33.100.20

Võtmesõnad: elektromagnetiline ühilduvus, häiringukindlus, tööstuskeskkond

Standardite reprodutseerimis- ja levitamiseõigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonilisse süsteemi või edastamine ükskõik millises vormis või millisel teel on keelatud ilma Eesti Standardikeskuse poolt antud kirjaliku loata.

Kui Teil on küsimusi standardite autorikaitse kohta, palun võtke ühendust Eesti Standardikeskusega:
Aru 10 Tallinn 10317 Eesti; www.evs.ee; Telefon: 605 5050; E-post: info@evs.ee

English version

**Electromagnetic compatibility (EMC)
Part 6-2: Generic standards –
Immunity for industrial environments
(IEC 61000-6-2:2005)**

Compatibilité électromagnétique (CEM)
Partie 6-2: Normes génériques –
Immunité pour les environnements
industriels
(CEI 61000-6-2:2005)

Elektromagnetische Verträglichkeit (EMV)
Teil 6-2: Fachgrundnormen –
Störfestigkeit für Industriebereiche
(IEC 61000-6-2:2005)

This European Standard was approved by CENELEC on 2005-06-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 77/295/FDIS, future edition 2 of IEC 61000-6-2, prepared by IEC TC 77, Electromagnetic compatibility, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 61000-6-2 on 2005-06-01.

This European Standard supersedes EN 61000-6-2:2001.

Specific technical changes have been introduced to Tables 1 to 4. The frequency range for tests according to EN 61000-4-3 has been extended above 1 GHz according to technologies used in this frequency area. The use of TEM waveguide testing according to EN 61000-4-20 has been introduced for certain products and the testing requirements according to EN 61000-4-11 have been amended significantly.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2006-03-01
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2008-06-01

This European Standard was prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association and supports the essential requirements of Directives 89/336/EEC and 1999/5/EC. See Annex ZZ.

Annexes ZA and ZZ have been added by CENELEC.

The contents of the corrigendum of September 2005 have been included in this copy.

Endorsement notice

The text of the International Standard IEC 61000-6-2:2005 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 61000-4-1	NOTE	Harmonized as EN 61000-4-1:2000 (not modified).
IEC 61000-4-20	NOTE	Harmonized as EN 61000-4-20:2003 (not modified).
CISPR 11	NOTE	Harmonized as EN 55011:1998 (modified).

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE Where an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60050-161	- ¹⁾	International Electrotechnical Vocabulary (IEV) Chapter 161: Electromagnetic compatibility	-	-
IEC 61000-4-2	- ¹⁾	Electromagnetic compatibility (EMC) Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test	EN 61000-4-2	1995 ²⁾
IEC 61000-4-3	- ¹⁾	Part 4-3: Testing and measurement techniques - Radiated, radio-frequency, electromagnetic field immunity test	EN 61000-4-3	2002 ²⁾
IEC 61000-4-4	- ¹⁾	Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test	EN 61000-4-4	2004 ²⁾
IEC 61000-4-5	- ¹⁾	Part 4-5: Testing and measurement techniques - Surge immunity test	EN 61000-4-5	1995 ²⁾
IEC 61000-4-6	- ¹⁾	Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields	-	-
IEC 61000-4-8	- ¹⁾	Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test	EN 61000-4-8	1993 ²⁾
IEC 61000-4-11	- ¹⁾	Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests	EN 61000-4-11	2004 ²⁾

¹⁾ Undated reference.

²⁾ Valid edition at date of issue.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
CISPR 22 (mod)	- ¹⁾	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement	EN 55022	- ³⁾

³⁾ In preparation.

Annex ZZ (informative)

Coverage of Essential Requirements of EC Directives

This European Standard has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association and within its scope the standard covers the essential requirements as given in Article 4 b) of the EC directive 89/336/EEC and the essential requirements of Article 3.1(b) (immunity only) of the EC directive 1999/5/EC.

Compliance with this standard provides one means of conformity with the specified essential requirements of the Directive(s) concerned.

WARNING: Other requirements and other EC Directives may be applicable to the products falling within the scope of this standard.

CONTENTS

FOREWORD	3
INTRODUCTION	5
1 Scope and object.....	6
2 Normative references	7
3 Terms and definitions	7
4 Performance criteria	8
5 Conditions during testing	9
6 Product documentation	9
7 Applicability.....	10
8 Immunity test requirements.....	10
Bibliography	15
Figure 1 – Examples of ports	8
Table 1 – Immunity – Enclosure ports	11
Table 2 – Immunity – Signal ports	12
Table 3 – Immunity – Input and output DC power ports.....	13
Table 4 – Immunity – Input and output AC power ports.....	14

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ELECTROMAGNETIC COMPATIBILITY (EMC) –**Part 6-2: Generic standards –
Immunity for industrial environments**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61000-6-2 has been prepared by IEC technical committee 77: Electromagnetic compatibility.

This second edition cancels and replaces the first edition published in 1999. It constitutes a technical revision. Specific technical changes have been introduced to Tables 1 to 4. The frequency range for tests according to IEC 61000-4-3 has been extended above 1 GHz according to technologies used in this frequency area. The use of TEM waveguide testing according to IEC 61000-4-20 has been introduced for certain products and the testing requirements according to IEC 61000-4-11 have been amended significantly.

The text of this standard is based on the following documents:

FDIS	Report on voting
77/295/FDIS	77/298/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

INTRODUCTION

IEC 61000 is published in separate parts according to the following structure:

Part 1: General

General considerations (introduction, fundamental principles)

Definitions, terminology

Part 2: Environment

Description of the environment

Classification of the environment

Compatibility levels

Part 3: Limits

Emission limits

Immunity limits (insofar as these limits do not fall under the responsibility of the product committees)

Part 4: Testing and measurement techniques

Measurement techniques

Testing techniques

Part 5: Installation and mitigation guidelines

Installation guidelines

Mitigation methods and devices

Part 6: Generic standards

Part 9: Miscellaneous

Each part is further subdivided into several parts, published either as International Standards or as technical specifications or technical reports, some of which have already been published as sections. Others will be published with the part number followed by a dash and a second number identifying the subdivision (example: 61000-6-1).

ELECTROMAGNETIC COMPATIBILITY (EMC) –

Part 6-2: Generic standards – Immunity for industrial environments

1 Scope and object

This part of IEC 61000 for EMC immunity requirements applies to electrical and electronic apparatus intended for use in industrial environments, as described below. Immunity requirements in the frequency range 0 Hz to 400 GHz are covered. No tests need to be performed at frequencies where no requirements are specified.

This generic EMC immunity standard is applicable if no relevant dedicated product or product-family EMC immunity standard exists.

This standard applies to apparatus intended to be connected to a power network supplied from a high or medium voltage transformer dedicated to the supply of an installation feeding manufacturing or similar plant, and intended to operate in or in proximity to industrial locations, as described below. This standard applies also to apparatus which is battery operated and intended to be used in industrial locations.

The environments encompassed by this standard are industrial, both indoor and outdoor.

Industrial locations are in addition characterised by the existence of one or more of the following:

- industrial, scientific and medical (ISM) apparatus (as defined in CISPR 11);
- heavy inductive or capacitive loads are frequently switched;
- currents and associated magnetic fields are high.

The object of this standard is to define immunity test requirements for apparatus defined in the scope in relation to continuous and transient, conducted and radiated disturbances, including electrostatic discharges.

The immunity requirements have been selected to ensure an adequate level of immunity for apparatus at industrial locations. The levels do not, however, cover extreme cases, which may occur at any location, but with an extremely low probability of occurrence. Not all disturbance phenomena have been included for testing purposes in this standard, but only those considered as relevant for the equipment covered by this standard. These test requirements represent essential electromagnetic compatibility immunity requirements.

NOTE 1 Information on other disturbance phenomena is given in IEC 61000-4-1.

Test requirements are specified for each port considered.

NOTE 2 Safety considerations are not covered by this standard.

NOTE 3 In special cases, situations will arise where the level of disturbances may exceed the levels specified in this standard e.g. where an apparatus is installed in proximity to ISM equipment as defined in CISPR 11 or where a hand-held transmitter is used in close proximity to an apparatus. In these instances, special mitigation measures may have to be employed.

NOTE 4 The industrial environment may be changed by special mitigation measures. Where such measures can be shown to produce an electromagnetic environment equivalent to the residential, commercial or light-industrial environment, then the generic standard for this environment, or the relevant product standard, should be applied.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-161, *International Electrotechnical Vocabulary (IEV) – Chapter 161: Electromagnetic compatibility*

IEC 61000-4-2, *Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – Section 2: Electrostatic discharge immunity test*

IEC 61000-4-3, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*

IEC 61000-4-4, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-5, *Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – Section 5: Surge immunity test*

IEC 61000-4-6, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Section 6: Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-8, *Electromagnetic compatibility (EMC) – Part 4: Testing and measurement techniques – Section 8: Power frequency magnetic field immunity test*

IEC 61000-4-11, *Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests*

CISPR 22, *Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement*

3 Terms and definitions


For the purposes of this document, the terms and definitions given in IEC 60050-161 as well as the following definitions apply.

NOTE Additional definitions related to EMC and to relevant phenomena are given in other IEC and CISPR publications.

3.1 port

particular interface of the specified apparatus with the external electromagnetic environment (see Figure 1)

NOTE In some cases different ports may be combined.

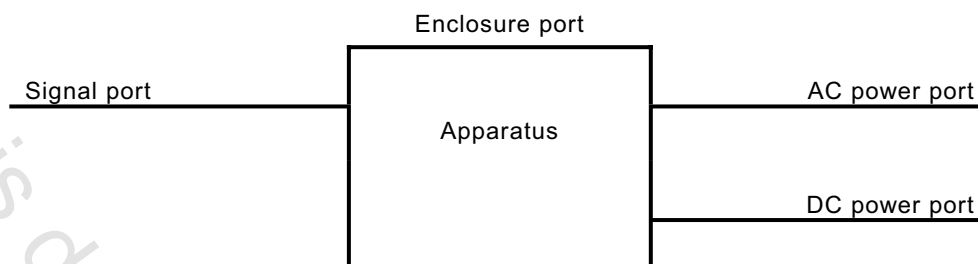

IEC 072/05

Figure 1 – Examples of ports

3.2

enclosure port

physical boundary of the apparatus which electromagnetic fields may radiate through or impinge on

3.3

cable port

port at which a conductor or a cable is connected to the apparatus

NOTE Examples are signal and power ports.

3.4

signal port

port at which a conductor or cable intended to carry signals is connected to the apparatus

NOTE Examples are analog inputs, outputs and control lines; data busses; communication networks etc.

3.5

power port

port at which a conductor or cable carrying the primary electrical power needed for the operation (functioning) of an apparatus or associated apparatus is connected to the apparatus

3.6

long distance lines

lines connected to a signal port and which inside a building are longer than 30 m, or which leave the building (including lines of outdoor installations)

4 Performance criteria

The variety and the diversity of the apparatus within the scope of this standard makes it difficult to define precise criteria for the evaluation of the immunity test results.

If, as a result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe, the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance criteria, during or as a consequence of the EMC testing, shall be provided by the manufacturer and noted in the test report, based on one of the following criteria for each test as specified in Tables 1 to 4:

- a) **Performance criterion A:** The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
- b) **Performance criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
- c) **Performance criterion C:** Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

5 Conditions during testing

The equipment under test (EUT) shall be tested in the expected most susceptible operating mode e.g. identified by performing limited pre-tests. This mode shall be consistent with normal applications. The configuration of the test sample shall be varied to achieve maximum susceptibility consistent with typical applications and installation practice.

If the apparatus is part of a system, or can be connected to auxiliary apparatus, the apparatus shall be tested while connected to the minimum representative configuration of auxiliary apparatus necessary to exercise the ports in a similar manner to that described in CISPR 22.

In cases where a manufacturer's specification requires external protection devices or measures which are clearly specified in the user's manual, the test requirements of this standard shall be applied with the external protection devices or measures in place.

The configuration and mode of operation during the tests shall be precisely noted in the test report. It is not always possible to test every function of the apparatus; in such cases the most critical mode(s) of operation shall be selected.

If the apparatus has a large number of similar ports or ports with many similar connections, a sufficient number shall be selected to simulate actual operating conditions and to ensure that all the different types of termination are covered.

The tests shall be carried out at one single set of parameters within the operating ranges of temperature, humidity and atmospheric pressure specified for the product and at the rated supply voltage, unless otherwise indicated in the basic standard.

6 Product documentation

If the manufacturer is using his own specification for an acceptable level of EMC performance or degradation of EMC performance during or after the testing required by this standard, this specification shall be provided in the product documentation available to the user.

7 Applicability

The application of tests for evaluation of immunity depends on the particular apparatus, its configuration, its ports, its technology and its operating conditions.

Tests shall be applied to the relevant ports of the apparatus according to Tables 1 to 4. Tests shall only be carried out where the relevant ports exist.

It may be determined from consideration of the electrical characteristics and usage of a particular apparatus that some of the tests are inappropriate and, therefore, unnecessary. In such a case, it is required that the decision and justification not to test be recorded in the test report.

8 Immunity test requirements

The immunity test requirements for apparatus covered by this standard are given on a port by port basis.

Tests shall be conducted in a well-defined and reproducible manner.

The tests shall be carried out individually as single tests in sequence. The tests may be performed in any order.

The description of the test, relevant generator, appropriate methods, and the set-up to be used are given in basic standards, which are referred to in the following tables.

The contents of these basic standards are not repeated here, however modifications or additional information needed for the practical application of the tests are given in this standard.

Table 1 – Immunity – Enclosure ports

	Environmental phenomena	Test specifications	Units	Basic standards	Remarks	Performance criterion
1.1	Power-frequency magnetic field	50, 60 30	Hz A/m	IEC 61000-4-8	^a The test shall be carried out at the frequencies appropriate to the power supply frequency. Equipment intended for use in areas supplied only at one of these frequencies need only be tested at that frequency	A ^b
1.2	Radio-frequency electromagnetic field. Amplitude modulated	80 to 1 000 10 80	MHz V/m % AM (1 kHz)	IEC 61000-4-3 ^d	^c The test level specified is the r.m.s. value of the unmodulated carrier	A
1.3	Radio-frequency electromagnetic field. Amplitude modulated	1,4 to 2,0 3 80	GHz V/m % AM (1 kHz)	IEC 61000-4-3 ^d	^e The test level specified is the r.m.s. value of the unmodulated carrier	A
1.4	Radio-frequency electromagnetic field. Amplitude modulated	2,0 to 2,7 1 80	GHz V/m % AM (1 kHz)	IEC 61000-4-3 ^d	^e The test level specified is the r.m.s. value of the unmodulated carrier	A
1.5	Electrostatic discharge	±4 (charge voltage) ±8 (charge voltage)	kV	IEC 61000-4-2	See basic standard for applicability of contact and/or air discharge tests	B
			kV			B

^a Applicable only to apparatus containing devices susceptible to magnetic fields.

^b For CRTs, the acceptable jitter depends upon the character size and is calculated for a test level of 1 A/m as follows:

$$J \leq \frac{(3C+1)}{40}$$

where jitter J and character size C are in millimetres.

As jitter is linearly proportional to the magnetic field strength, tests can be carried out at other test levels extrapolating the maximum jitter level appropriately.

^c Except for the ITU broadcast frequency bands 87 MHz to 108 MHz, 174 MHz to 230 MHz, and 470 MHz to 790 MHz, where the level shall be 3 V/m.

^d IEC 61000-4-20 may be used for small EUTs as defined in IEC 61000-4-20 subclause 6.1.

^e The frequency range has been selected to cover the frequencies with the highest potential risk of a disturbance.

Table 3 – Immunity – Input and output DC power ports

	Environmental phenomena	Test specifications	Units	Basic standards	Remarks	Performance criterion
3.1	Radio-frequency common mode	0,15 to 80 10 80	MHz V % AM (1 kHz)	IEC 61000-4-6	a, b The test level specified is the r.m.s. value of the unmodulated carrier	A
3.2	Surges line-to-earth line-to-line	1,2/50 (8/20) ±0,5 ±0,5	Tr/Th µs kV (open circuit test voltage) kV (open circuit test voltage)	IEC 61000-4-5	c	B
3.3	Fast transients	±2 5/50 5	kV (open circuit test voltage) Tr/Th ns Repetition frequency kHz	IEC 61000-4-4	d	B

a The test level can also be defined as the equivalent current into a 150 Ω load.

b Except for the ITU broadcast frequency band 47 MHz to 68 MHz, where the level shall be 3 V.

c Not applicable to input ports intended for connection to a battery or a rechargeable battery which must be removed or disconnected from the apparatus for recharging. Apparatus with a DC power input port intended for use with an AC-DC power adaptor shall be tested on the AC power input of the AC-DC power adaptor specified by the manufacturer or, where none is so specified, using a typical AC-DC power adaptor. DC ports, which are not intended to be connected to a DC distribution network are treated as signal ports.

d Not applicable to input ports intended for connection to a battery or a rechargeable battery which must be removed or disconnected from the apparatus for recharging. Apparatus with a DC power input port intended for use with an AC-DC power adaptor shall be tested on the AC power input of the AC-DC power adaptor specified by the manufacturer or, where none is so specified, using a typical AC-DC power adaptor. The test is applicable to DC power input ports intended to be connected permanently to cables longer than 3 m.

Bibliography

IEC 61000-4-1, *Electromagnetic compatibility (EMC) – Part 4-1: Testing and measurement techniques – Overview of IEC 61000-4 series*

IEC 61000-4-20, *Electromagnetic compatibility (EMC) – Part 4-20: Testing and measurement techniques – Emission and immunity testing in transverse electromagnetic (TEM) waveguides*

CISPR 11, *Industrial, scientific and medical (ISM) radio-frequency equipment – Electromagnetic disturbance characteristics – Limits and methods of measurement*

This document is a preview generated by EVS

This document is a preview generated by EVS