

**Fuel cell technologies - Part 6-300: Micro fuel cell power systems - Fuel cartridge interchangeability (IEC 62282-6-300:2012)**

## EESTI STANDARDI EESSÕNA

## NATIONAL FOREWORD

See Eesti standard EVS-EN 62282-6-300:2013 sisaldab Euroopa standardi EN 62282-6-300:2013 ingliskeelset teksti.	This Estonian standard EVS-EN 62282-6-300:2013 consists of the English text of the European standard EN 62282-6-300:2013.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas.	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation.
Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 05.07.2013.	Date of Availability of the European standard is 05.07.2013.
Standard on kättesaadav Eesti Standardikeskusest.	The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile [standardiosakond@evs.ee](mailto:standardiosakond@evs.ee).

ICS 27.070

### Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:  
Aru 10, 10317 Tallinn, Eesti; [www.evs.ee](http://www.evs.ee); telefon 605 5050; e-post [info@evs.ee](mailto:info@evs.ee)

### The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:  
Aru 10, 10317 Tallinn, Estonia; [www.evs.ee](http://www.evs.ee); phone 605 5050; e-mail [info@evs.ee](mailto:info@evs.ee)

English version

**Fuel cell technologies -  
Part 6-300: Micro fuel cell power systems -  
Fuel cartridge interchangeability  
(IEC 62282-6-300:2012)**

Technologies des piles à combustible -  
Partie 6-300: Systèmes à micro-piles à  
combustible -  
Interchangeabilité de la cartouche de  
combustible  
(CEI 62282-6-300:2012)

Brennstoffzellentechnologien -  
Teil 6-300: Mikrobrennstoffzellen-  
Energiesysteme -  
Austauschbarkeit der Brennstoffkartusche  
(IEC 62282-6-300:2012)

This European Standard was approved by CENELEC on 2013-01-17. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Management Centre: Avenue Marnix 17, B - 1000 Brussels**

## Foreword

The text of document 105/370/CDV, future edition 2 of IEC 62282-6-300, prepared by IEC TC 105, "Fuel cell technologies" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 62282-6-300:2013.

The following dates are fixed:

- latest date by which the document has (dop) 2014-01-05  
to be implemented at national level by  
publication of an identical national  
standard or by endorsement
- latest date by which the national (dow) 2016-01-17  
standards conflicting with the  
document have to be withdrawn

This document supersedes EN 62282-6-300:2009.

EN 62282-6-300:2013 includes the following significant technical changes with respect to EN 62282-6-300:2009:

- a) The status of designs yet to be included in the standard is clarified.
- b) Type A to D interchangeable connectors are updated, and Type E is added.
- c) The procedures, criteria and figures of the type tests for interchangeable connectors are updated to ensure they produce accurate and consistent results.
- d) The fuel quality requirements are updated including the test procedures for residue and impurities.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

## Endorsement notice

The text of the International Standard IEC 62282-6-300:2012 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

- |                 |                                    |
|-----------------|------------------------------------|
| IEC 61032       | NOTE Harmonized as EN 61032.       |
| IEC 62282-6-200 | NOTE Harmonized as EN 62282-6-200. |

**Annex ZA**  
(normative)  
**Normative references to international publications**  
**with their corresponding European publications**

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60950-1	-	Information technology equipment - Safety - Part 1: General requirements	EN 60950-1	-
IEC 62282-6-100 + corr. December	2010 2011	Fuel cell technologies - Part 6-100: Micro fuel cell power systems - Safety	EN 62282-6-100	2010
IEC 62282-6-200	-	Fuel cell technologies - Part 6-200: Micro fuel cell power systems - Performance test methods	EN 62282-6-200	-
ISO 1302	2002	Geometrical Product Specifications (GPS) - Indication of surface texture in technical product documentation	EN ISO 1302	2002

## CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
2 Normative references .....	10
3 Terms and definitions .....	10
4 Fuel connectors.....	13
4.1 Basic requirements.....	13
4.1.1 Safety.....	13
4.1.2 Safety of connectors during connecting, fueling and removing .....	14
4.2 Construction and actuation requirements.....	15
4.2.1 General .....	15
4.2.2 Connector sealing.....	15
4.2.3 Connector sequence.....	15
4.2.4 Mechanical keys .....	15
4.2.5 Material requirement.....	15
4.3 Interchangeable fuel connectors.....	15
4.3.1 General .....	15
4.3.2 Type A.....	16
4.3.3 Type B.....	23
4.3.4 Type C .....	30
4.3.5 Type D .....	36
4.3.6 Type E.....	42
4.4 Type tests for interchangeable fuel connectors.....	47
4.4.1 Test types .....	47
4.4.2 Mechanical strength requirement for interchangeable fuel connectors .....	48
4.4.3 Test parameters .....	48
4.4.4 Classification of cartridge size and connector strength .....	49
4.4.5 Test fixtures .....	49
4.4.6 Forces expected in normal operation and in foreseeable misuse ( $f_1$ and $f_2$ ).....	50
4.4.7 Number of samples.....	51
4.4.8 Laboratory conditions .....	52
4.4.9 Type tests .....	52
5 Fuel cartridge .....	79
5.1 Fuel concentrations .....	79
5.2 Cartridge pressure.....	79
5.3 Cartridge capacity, size and shape.....	79
5.3.1 Cartridge size and shape.....	79
5.3.2 Cartridge capacity and usable fuel determination.....	82
5.4 Maximum discharge pressure .....	84
5.5 Fuel quality .....	87
5.5.1 General requirements .....	87
5.5.2 Fuel quality requirements .....	87
5.5.3 Test sample.....	88
5.5.4 Test procedure to measure the residue.....	88
5.5.5 Impurities test.....	89

5.5.6 Test set-up for impurities test with fuel cell operation .....	91
6 Marking .....	94
6.1 Cartridge marking.....	94
6.2 MFC power unit or electronic device marking .....	95
6.3 User information required in the manual or on the packaging .....	96
Annex A (informative) Calculations of $f_1$ , $f_2$ , and maximum discharge pressure .....	97
Annex B (informative) Test fixtures .....	100
Bibliography .....	103
Figure 1 – MFC power system block diagram.....	10
Figure 2 – Fuel cartridge types .....	12
Figure 3 – MFC power unit side connector design (cross-sectional view) .....	16
Figure 4 – MFC power unit side connector design (front-elevational view) .....	16
Figure 5 – Seal surface area design for MFC power unit side connector (cross-sectional view).....	17
Figure 6 – Cartridge space for satellite cartridge (cross-sectional view) .....	18
Figure 7 – Cartridge space for insert cartridge (cross-sectional view) .....	19
Figure 8 – Mechanical key (wide and 2-key type).....	20
Figure 9 – Mechanical key (narrow and 3-key type) .....	20
Figure 10 – Mechanical key variation with key number (front-elevational view) .....	20
Figure 11 – Connector retainer (unlocked) .....	22
Figure 12 – Connector retainer (maximum set-back: locked).....	22
Figure 13 – MFC power unit side connector design (cross-sectional view) .....	24
Figure 14 – MFC power unit side connector design (front-elevational view).....	24
Figure 15 – Cartridge space (cross-sectional view).....	25
Figure 16 – Mechanical keys.....	26
Figure 17 – Connector retainer (cross-sectional view before connection) .....	28
Figure 18 – Connector retainer (front-elevational view before connection) .....	28
Figure 19 – Connector retainer (cross-sectional view when retained).....	28
Figure 20 – Connector retainer (front-elevational view when retained) .....	28
Figure 21 – Connector retainer engaged (cross-sectional view) .....	29
Figure 22 – MFC power unit side connector design (cross-sectional view) .....	31
Figure 23 – MFC power unit side connector design (front-elevational view).....	31
Figure 24 – Cartridge space (cross-sectional view).....	32
Figure 25 – Mechanical key (cross-sectional view).....	33
Figure 26 – Mechanical key (front-elevational view) .....	33
Figure 27 – Mechanical key variation with key number.....	33
Figure 28 – Connector retainer (cross-sectional view).....	34
Figure 29 – MFC power unit side connector design (cross-sectional view) .....	36
Figure 30 – MFC power unit side connector design (front-elevational view).....	36
Figure 31 – Cartridge space for insert cartridge (cross-sectional view).....	37
Figure 32 – Mechanical key (cross-sectional view).....	38
Figure 33 – Mechanical key (front-elevational view).....	38
Figure 34 – Mechanical key variation with key number.....	39

Figure 35 – Connector retainer (cross-sectional view) .....	40
Figure 36 – Connector retainer (front-elevational view) .....	40
Figure 37 – MFC power unit side connector design .....	42
Figure 38 – Seal surface area design for MFC power unit side connector (cross-sectional view) .....	43
Figure 39 – Cartridge space for satellite cartridge (cross-sectional view) .....	44
Figure 40 – Cartridge space for insert cartridge (cross-sectional view) .....	45
Figure 41 – Connector retainer .....	46
Figure 42 – Flow chart for connector type tests – Compression test for proper combination and correct orientation in normal operation on a manufacturer's cartridge or a manufacturer's end use MFC device .....	53
Figure 43 – Flow chart for connector type tests – Compression test for proper combination and incorrect orientation in normal operation on a manufacturer's cartridge or a manufacturer's end use MFC device .....	55
Figure 44 – Flow chart for connector type tests – Compression test for proper combination and incorrect orientation in foreseeable misuse on a manufacturer's cartridge or a manufacturer's end use MFC device .....	57
Figure 45 – Flow chart for connector type tests – Compression test for improper mechanical key combination in normal operations on a manufacturer's cartridge or a manufacturer's end use MFC device .....	59
Figure 46 – Flow chart for connector type tests – Compression test for improper mechanical key combination in foreseeable misuse on a manufacturer's cartridge or a manufacturer's end use MFC device .....	61
Figure 47 – Flow chart for connector type tests – Tensile test in normal operations on a manufacturer's cartridge or a manufacturer's end use MFC device .....	63
Figure 48 – Flow chart for connector type tests – Tensile test in foreseeable misuse on a manufacturer's cartridge or a manufacturer's end use MFC device .....	65
Figure 49 – Flow chart for connector type tests – Torsion test in normal operations on a manufacturer's cartridge or a manufacturer's end use MFC device .....	67
Figure 50 – Flow chart for connector type tests – Torsion test in foreseeable misuse on a manufacturer's cartridge or a manufacturer's end use MFC device .....	69
Figure 51 – Flow chart for connector type tests – Bending test in normal operations on a manufacturer's cartridge or a manufacturer's end use MFC device .....	71
Figure 52 – Flow chart for connector type tests – Bending test in foreseeable misuse on a manufacturer's cartridge or a manufacturer's end use MFC device .....	73
Figure 53 – Flow chart for connector type tests – Drop test in foreseeable misuse on a manufacturer's cartridge or a manufacturer's end use MFC device .....	76
Figure 54 – Flow chart for connector type tests – Vibration test in normal operations on a manufacturer's cartridge or a manufacturer's end use MFC device .....	78
Figure 55 – Prismatic cartridge .....	79
Figure 56 – Cylindrical cartridge .....	81
Figure 57 – Test diagram – Usable fuel measurement for pump-assisted discharging cartridge (option 1) .....	83
Figure 58 – Test diagram – Usable fuel measurement for pump-assisted discharging cartridge (option 2) .....	83
Figure 59 – Test diagram – Usable fuel measurement for non-pump assisted discharging cartridge .....	84
Figure 60 – Test diagram – Usable fuel measurement for pressurized cartridge .....	84
Figure 61 – Flow chart for maximum discharge pressure test .....	86
Figure 62 – Test apparatus .....	92

Figure 63 – Test cell construction drawing .....	92
Figure 64 – Exploded view of test cell .....	93
Figure 65 – Endplate and its flow channel design.....	93
Figure 66 – Types of fuel cartridges .....	95
Figure B.1 – Device test fixture for cartridge testing of 4.4.9 .....	100
Figure B.2 – Device test fixture for cartridge testing of 5.3.2 and 5.4 .....	101
Figure B.3 – Cartridge test fixture for device testing of 4.4.9 .....	102
Table 1 – Dimension and tolerance for MFC power unit side connector.....	17
Table 2 – Dimension of space for satellite cartridge in MFC power unit.....	18
Table 3 – Dimension for insert cartridge space in MFC power unit .....	19
Table 4 – Key location and dimension with tolerance for mechanical key .....	21
Table 5 – Dimension and tolerance for connector retainer on the MFC power unit side .....	22
Table 6 – Dimension and tolerance for MFC power unit side connector.....	24
Table 7 – Dimension and tolerance .....	25
Table 8 – Key location and dimension with tolerance for mechanical key .....	26
Table 9 – Dimension and tolerance for connector retainer on the MFC power unit .....	29
Table 10 – Dimension and tolerance for MFC power unit side connector.....	31
Table 11 – Dimension and tolerance for cartridge space within MFC power unit.....	32
Table 12 – Key location and dimension with tolerance for mechanical key .....	34
Table 13 – Dimension and tolerance for the MFC power unit side connector retainer .....	35
Table 14 – Dimension and tolerance for MFC power unit side connector.....	37
Table 15 – Dimension and tolerance for the cartridge space in MFC power unit .....	38
Table 16 – Dimension and tolerance for mechanical key .....	38
Table 17 – Key location for mechanical key .....	39
Table 18 – Dimension and tolerance for the MFC power unit side retainer .....	41
Table 19 – Dimension and tolerance for MFC power unit side connector.....	43
Table 20 – Dimension of space for satellite cartridge in MFC power unit.....	44
Table 21 – Dimensions for insert cartridge space in MFC power unit.....	45
Table 22 – Dimension and tolerance for connector retainer on the MFC power unit side .....	46
Table 23 – Interchangeable fuel connector type tests.....	49
Table 24 – Classification of cartridge size and connector strength .....	49
Table 25 – Device test fixture for cartridge testing .....	50
Table 26 – Cartridge test fixture for device testing .....	50
Table 27 – External forces expected in normal operation and foreseeable misuse .....	51
Table 28 – Size and type of prismatic cartridge.....	80
Table 29 – Size and type of cylindrical cartridge .....	81
Table 30 – Test parameters for usable fuel determination .....	82
Table A.1 – Weight and size of typical cartridge.....	97
Table A.2 – Ergonomics data – Force by human hand or finger.....	97
Table A.3 – Forces $f_1$ and $f_2$ for type tests.....	98

## INTRODUCTION

The International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this document may involve the use of patents concerning fuel connectors given in 4.3.1, 4.3.2, 4.3.3 and 4.3.4, patents concerning mechanical keys given in 4.2.3, and patents concerning fuel quality in 5.5.

IEC takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured the IEC that he is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with IEC. Information may be obtained from:

- Hitachi, Ltd., 1-1, Omika-cho 7-chome, Hitachi-shi, 319-1292 Japan
- Toyo Seikan Kaisha, Ltd., 3-1 Uchisaiwaicho 1-chome, Tokyo 100-8522 Japan
- Toshiba Corporation, 1-1, Shibaura 1-chome, Tokyo 1005-8001 Japan
- Tokai Corporation, 3-4, Shimohara, Subashiri, Oyama-cho, Sunto-Gun, Shizuoka, 410-1431 Japan
- NEC Corporation, 7-1, Shiba 5-chome, Tokyo 108-8001 Japan
- Samsung SDI Co., Ltd., 575 Shin-dong, Yeongtong-gu, Suwan-si, Gyeonggi-do, 443-731, Korea.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC shall not be held responsible for identifying any or all such patent rights.

ISO ([www.iso.org/patents](http://www.iso.org/patents)) and IEC (<http://patents.iec.ch>) maintain on-line data bases of patents relevant to their standards. Users are encouraged to consult the data bases for the most up to date information concerning patents.

## FUEL CELL TECHNOLOGIES –

### Part 6-300: Micro fuel cell power systems – Fuel cartridge interchangeability


#### 1 Scope

This part of IEC 62282 covers interchangeability of micro fuel cell (MFC) fuel cartridges to provide the cartridge compatibility for a variety of MFC power units while maintaining the safety and performance of MFC power systems. For this purpose, the standard covers fuel cartridges and their connector designs. Fuel type, fuel concentration and fuel quality are also covered. This standard also provides for the means to avoid the miss-connection of an improper fuel cartridge. Test methods for verifying the compliance with the interchangeability requirements for fuel and fuel cartridges are also provided in this standard.

IEC 62282-6-100 and IEC 62282-6-200 do not cover fuel cartridge or fuel from the cartridge. IEC 62282-6-300 describes the performance test methods of fuel cartridges, the fuel from the cartridge, and markings to realize the interchangeability of fuel cartridges. These include performance effect of fuel cartridges, such as fuel quality which may affect the performance of MFC power units and usable fuel volume from fuel cartridges.

A MFC power system block diagram is shown in Figure 1. MFC power systems and MFC power units are defined as those wearable or easily carried by hand, providing d.c. outputs that do not exceed 60 V and power outputs that do not exceed 240 VA. This standard covers the fuel cartridge for MFC power units and the mechanical interface of connectors between fuel cartridges and MFC power units. The main body of this standard includes methanol liquid fuel cartridges, including methanol and water solution. Annex A shows the background used to determine the forces expected in normal operation and in foreseeable misuse. Annex B shows the example design for test fixtures for the fuel connector and fuel cartridge type tests.

NOTE Liquid fuel means fuel transported from a cartridge to a MFC power unit in the liquid state, and gas fuel means fuel transported from a cartridge to a power unit in the gaseous state.

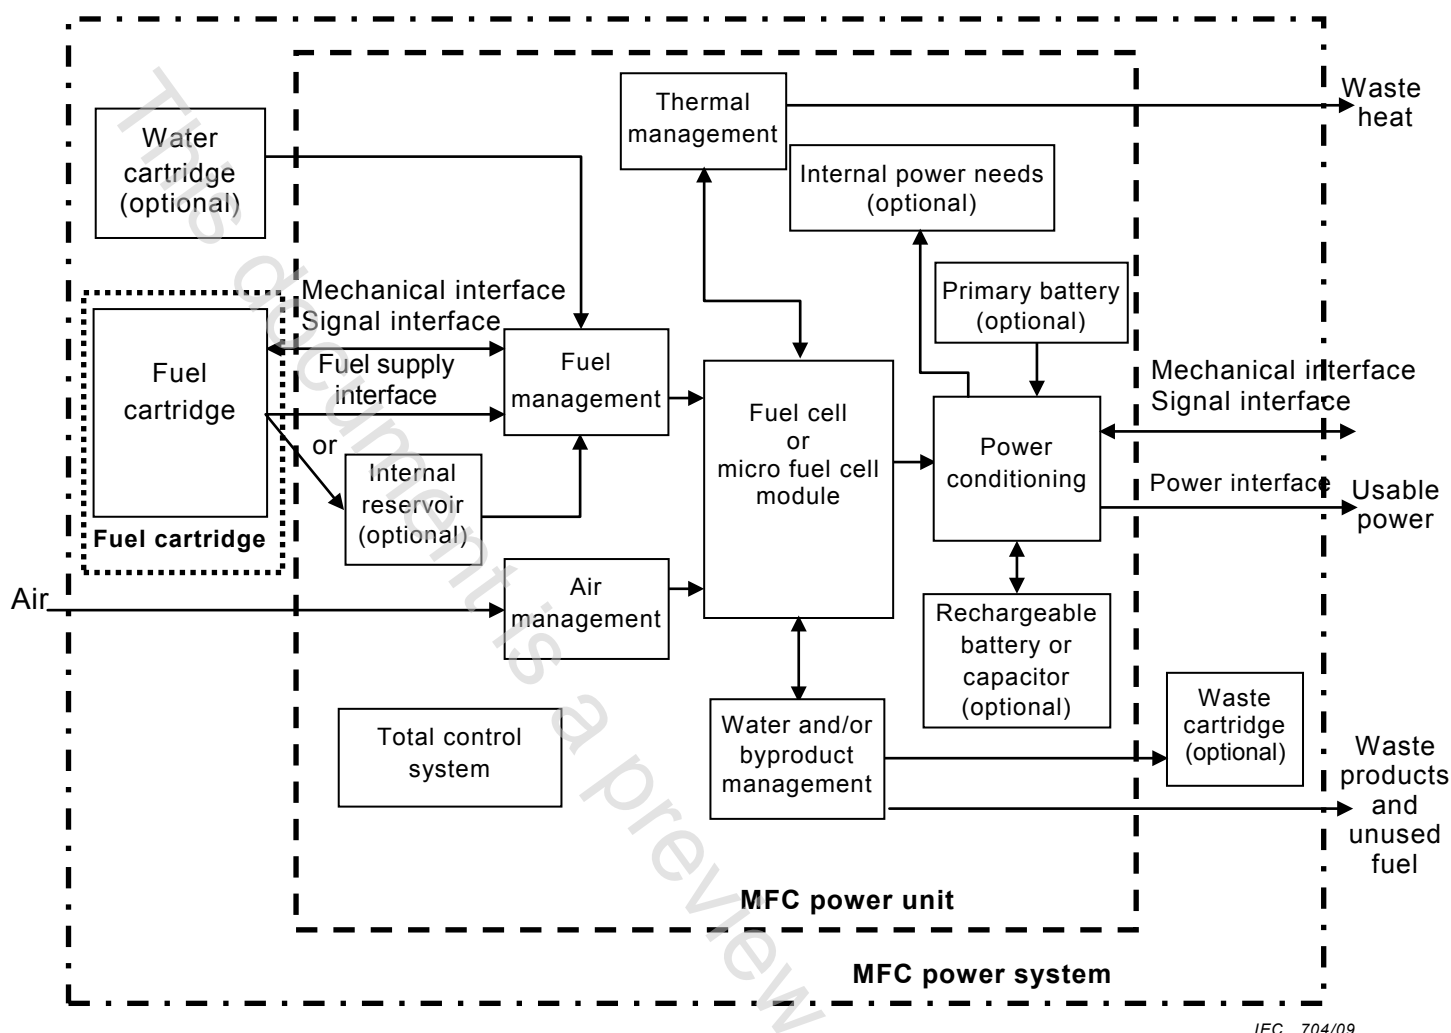

IEC 704/09

Figure 1 – MFC power system block diagram

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60950-1, *Information technology equipment – Safety – Part 1: General requirements*

IEC 62282-6-100:2010, *Fuel cell technologies – Part 6-100: Micro fuel cell power systems – Safety*

IEC 62282-6-200, *Fuel cell technologies – Part 6-200: Micro fuel cell power systems – Performance test methods*

ISO 1302:2002, *Geometrical product specifications (GPS) – Indication of surface texture in technical product documentation*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.