

Common control interface for networked digital audio and video products -- Part 1: General

Common control interface for networked digital audio
and video products -- Part 1: General

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

<p>Käesolev Eesti standard EVS-EN 62379-1:2007 sisaldab Euroopa standardi EN 62379-1:2007 ingliskeelset teksti.</p> <p>Käesolev dokument on jõustatud 17.12.2007 ja selle kohta on avaldatud teade Eesti standardiorganisatsiooni ametlikus väljaandes.</p> <p>Standard on kättesaadav Eesti standardiorganisatsioonist.</p>	<p>This Estonian standard EVS-EN 62379-1:2007 consists of the English text of the European standard EN 62379-1:2007.</p> <p>This document is endorsed on 17.12.2007 with the notification being published in the official publication of the Estonian national standardisation organisation.</p> <p>The standard is available from Estonian standardisation organisation.</p>
--	---

<p>Käsitlusala:</p> <p>This part of IEC 62379 specifies a control interface for products which convey audio and/or video across digital networks. Separate documents specify items specific to a particular type of traffic, a particular networking technology, or a particular class of application.</p>	<p>Scope:</p> <p>This part of IEC 62379 specifies a control interface for products which convey audio and/or video across digital networks. Separate documents specify items specific to a particular type of traffic, a particular networking technology, or a particular class of application.</p>
---	---

ICS 33.160, 35.100

Võtmesõnad:

**Common control interface
for networked digital audio and video products -
Part 1: General
(IEC 62379-1:2007)**

Interface de commande commun destiné
aux produits audio et vidéo numériques
connectés en réseau -
Partie 1: Généralités
(CEI 62379-1:2007)

Gemeinsame Steuerschnittstelle
für netzwerkbetriebene digitale
Audio- und Videogeräte -
Teil 1: Allgemeines
(IEC 62379-1:2007)

This European Standard was approved by CENELEC on 2007-10-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in two official versions (English and German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 100/1248/FDIS, future edition 1 of IEC 62379-1, prepared by IEC TC 100, Audio, video and multimedia systems and equipment, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 62379-1 on 2007-10-01.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2008-07-01
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2010-10-01

Annex ZA has been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 62379-1:2007 was approved by CENELEC as a European Standard without any modification.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE When an international publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
ISO/IEC 646	1991	Information technology - ISO 7-bit coded character set for information interchange	-	-
ISO/IEC 8824-1	2002	Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation	-	-
IEEE Std 802	2001	IEEE Standard for Local and Metropolitan Area Networks: Overview and Architecture	-	-
RFC 1157	- ¹⁾	Simple Network Management Protocol (SNMP) (IETF Standard #15)	-	-
RFC 1441	- ¹⁾	Introduction to version 2 of the Internet-standard Network Management Framework (IETF)	-	-
RFC 3411-3418	- ¹⁾	Simple Network Management Protocol version 3 (IETF Standard #62)	-	-

¹⁾ Undated reference.

INTERNATIONAL STANDARD

**Common control interface for networked digital audio and video products –
Part 1: General**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00



IEC 62379-1

Edition 1.0 2007-08

INTERNATIONAL STANDARD

**Common control interface for networked digital audio and video products –
Part 1: General**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

XB

ICS 33.160; 35.100

ISBN 2-8318-9279-1

CONTENTS

FOREWORD.....	4
0 Introduction	6
0.1 Overview	6
0.2 Structure of the family of standards	6
0.3 Model of the equipment being controlled	7
0.3.1 Blocks	7
0.3.2 Control framework	8
0.3.3 How the framework helps when designing units	9
0.3.4 How the framework enables "plug and play"	9
0.3.5 Defining a new type of block	9
0.4 Management information base (MIB)	10
0.4.1 Objects	10
0.4.2 Other uses of OIDs	10
0.4.3 Migration to XML	10
0.5 Status broadcasts	11
0.5.1 Introduction	11
0.5.2 Status page information sources	11
0.5.3 Status page general format	11
0.6 Calls	11
0.7 Privilege levels	12
0.8 Automation	13
0.9 Uploading software	13
0.10 Encapsulation of messages	14
0.11 Further information	14
1 Scope	15
2 Normative references	15
3 Terms and definitions	15
4 Unit management	18
4.1 Protocol	18
4.2 MIB definitions	19
4.2.1 General	19
4.2.2 Application-wide type definitions	20
4.2.3 Conceptual row type definitions	24
4.2.4 MIB objects for basic unit identity and status information	25
4.2.5 MIB objects for the block framework	28
4.2.6 MIB objects for real time clock information	30
4.2.7 MIB objects for reference clock information	31
4.2.8 MIB objects for software upload	32
4.2.9 MIB objects for scheduled operations	34
5 Procedures	36
5.1 Real-time clocks	36
5.2 Procedures for uploading software	36
5.2.1 Areas	36
5.2.2 Contents	37
5.2.3 Procedure for updating a software component	37

5.2.4	File format for a software component.....	38
5.2.5	Format for product files	39
5.2.6	Software distribution	40
5.3	Scheduled operations.....	40
5.3.1	Requesting a scheduled operation	40
5.3.2	Executing a scheduled operation	42
5.3.3	Delaying a scheduled operation	42
5.3.4	Aborting a scheduled operation	42
5.3.5	State of relative operations	42
6	Status broadcasts.....	42
6.1	General	42
6.2	Page formats.....	44
6.2.1	Basic unit identity page	44
6.2.2	Time-of-day page	44
6.2.3	Scheduled operations page	45
6.3	Page groups.....	45
6.3.1	<code>basicUnitStatus</code>	45
6.3.2	<code>timeOfDay</code>	45
6.3.3	<code>scheduledOps</code>	45
	Annex A (informative) Background information.....	47
	Annex B (informative) Machine-readable MIB definitions.....	50
	Annex C (informative) Machine-readable status page-group definitions	68
	Bibliography.....	69
	Figure 1 – A block.....	7
	Figure 2 – Ports	7
	Figure 3 – Example of a "unit".....	8
	Table 1 – Managed objects conveying information about the unit.....	25
	Table 2 – Managed objects for block and connector configuration.....	28
	Table 3 – Managed objects for real-time clock information	30
	Table 4 – Managed objects for reference clock information	31
	Table 5 – Managed objects for software upload	32
	Table 6 – Managed objects for scheduled operations.....	34

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMON CONTROL INTERFACE FOR NETWORKED DIGITAL AUDIO AND VIDEO PRODUCTS –

Part 1: General

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62379-1 has been prepared by IEC technical committee 100: Audio, video and multimedia systems and equipment.

The text of this standard is based on the following documents:

FDIS	Report on voting
100/1248/FDIS	100/1281/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

0 Introduction

0.1 Overview

This family of standards specifies a control framework for networked audiovisual equipment.

It provides a means for management entities to control not only transmission across the network but also other functions within interface equipment.

Although it was originally developed for audio over asynchronous transfer mode (ATM) in radio broadcasting, the control framework has been extended to encompass video and other time-critical media, as well as other networking technologies and other applications in both professional and consumer environments.

The control framework provides a number of key features:

- it provides a consistent interface to the functionality in an audiovisual unit;
- it enables systems to be built that are truly "plug and play", by providing the means for equipment to discover what units are connected to the network and what their capabilities are;
- it links discrete areas or blocks of functionality together in a consistent and structured way;
- it allows us to define small focused building blocks from which more complex functionality can be built;
- it ensures new functionality can be developed and integrated consistently and easily into the framework.

The functionality provided by an audiovisual unit is represented using one or more "blocks" (such as a cross-point switch or a gain control), structured and connected together using the control framework.

As a further aid to the "plug-and-play" functionality, a common format for audio and video being conveyed across the network is also specified, to avoid situations in which two pieces of equipment fail to communicate because there is no format which both support. Equipment may, of course, also support other formats appropriate to particular applications, and the standard mechanisms for initiating and terminating communication will work for those formats in the same way as for the standard formats.

0.2 Structure of the family of standards

IEC 62379 is intended to include the following parts:

Part 1: General

Part 2: Audio

Part 3: Video

Part 4: Data

Part 5: Transmission over networks

Part 6: Packet transfer service

Part 1 specifies aspects which are common to all equipment.

Parts 2 to 4 specify control of internal functions specific to equipment carrying particular types of media; in the case of Part 4, this would be time-critical media other than audio and video, for instance, RS232 and RS422 data for applications such as machine control, or the state of

the “on air” light in a broadcast studio. Part 4 does not refer to packet data such as the control messages themselves.

Part 5 specifies control of transmission of these media over each individual network technology, with a separate subpart for each technology. It includes network specific management interfaces along with network specific control elements that integrate into the control framework.

Part 6 specifies carriage of control and status messages and non-audiovisual data over transports that do not support audio and video, such as RS232 serial links, with (as with Part 5) a separate subpart for each technology.

0.3 Model of the equipment being controlled

0.3.1 Blocks

A piece of equipment (a “unit”) is regarded as being composed of functional elements or “blocks” which may be linked to each other through internal routing.

Blocks may have inputs, outputs and internal functionality. In general, the output of one block connects to the input of the next block in the processing chain. Blocks can have some associated control parameters and/or status monitoring accessible via the control framework management interface.



Figure 1 – A block

A typical block would be a pre-amplifier, which has one input, one output, and a parameter which sets the gain. Another would be a mixer, with several inputs, one output, and parameters to select the contribution of each input to the mix; these parameters are effectively fader settings. A tone generator would have one output and no inputs, and parameters that set the level, frequency, etc.

There is a special class of blocks called “ports”; ports provide an external connection to other equipment. An “input port” is one where audio, video, or other data enters the unit and an “output port” is one where it leaves the unit. Sometimes the port corresponds to a physical connection, for instance, an XLR socket for analogue audio; sometimes it is a virtual entity which can be one end of a connection across a network, or one channel on an interface such as AES10 (MADI) which conveys multiple audio streams.




Figure 2 – Ports

An input port has no inputs (or rather, no internal inputs; it will have an external input, but that is not part of the model of the internal structure of the unit) and a single output, which

supplies the incoming stream to the inputs of other blocks. In the case of a network port, parameters would specify the network address; a physical audio port might have parameters which show the sampling rate and bit depth. Similarly, an output port has a single input and no (internal) outputs.

Figure 3 shows an example of how the various blocks connect together within a unit. Note that each input is connected to exactly one output, but an output may be connected to several inputs, or to none.

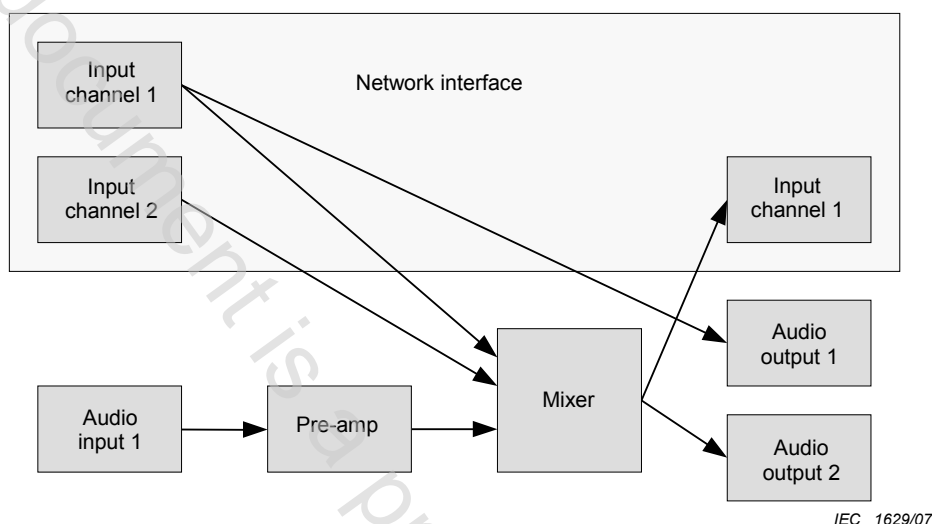


Figure 3 – Example of a "unit"

There is a block which performs a mix between three inputs, two from the network and one from a physical audio port (or, looking at it another way, two from remote sources and one from a local source). The local source is connected via a pre-amplifier. The resulting signal is output locally at output 2 and also transmitted on the network. There is another local output which carries a copy of one of the remote sources.

The set of available blocks, the connectivity between them, and the parameter settings for each may be fixed, or changeable by a management terminal, or read-only but changeable by external factors. Where blocks are implemented in software, a unit may provide the ability for a management terminal to create and delete them. Where blocks are implemented in physical hardware, the blocks themselves cannot be changed but it may still be possible for the management terminal to reprogramme the routing between them.

0.3.2 Control framework

The control framework consists of two lists; a list of blocks (also called control elements), and a list of connections between them. In both lists, an individual block is identified by a "block id", which is a number that is different for each block in a unit.

A block's entry in the list of blocks shows what type of block it is, represented by a globally unique value as described in 0.3.5.

Groups of blocks that are connected together are called processing chains. A processing chain typically represents what a unit does as a whole, so, for instance, a unit that alters the gain of an input to produce an output would have one simple processing chain that consists of an input port connected to a gain block which is connected to an output port.

0.3.3 How the framework helps when designing units

The standard anticipates that many control blocks will be designed and implemented over time to control the many different sorts of functionality audio and audiovisual units provide.

Units can be built from existing blocks or new ones created as required. It will often be possible to represent complex, product-specific control functionality using a number of linked instances of simpler, standard blocks that together provide the functionality required.

0.3.4 How the framework enables "plug and play"

A management terminal simply needs to recognize those blocks that are relevant to the functions it controls. (The term "management terminal" covers a wide variety of equipment, from a broadcast control system to the user interface of a device on a home network.)

It can discover what units are present on the network and what functions each contains; it does not need to recognize the units themselves, only the blocks that describe the functionality in which it is interested.

The discovery process would be:

- to create a list of the units, beginning with those to which it is directly connected; units can be uniquely identified by their 48-bit MAC address;
- to retrieve the list of blocks from each device on the list; if any are network ports which give access to further devices, to add those devices to the list (unless they are already on it);
- to retrieve the connectivity between any blocks for which it is relevant.

For instance, the user interface to a surround-sound audio system might search for units containing audio sources, find those for which a processing chain exists that allows them to be made available to the user, and offer them in a menu. It would also identify functions in the processing chain such as volume control and play-out controls (pause, rewind, skip track, etc.).

In a radio broadcast control system, a similar process could be performed when the system is installed and at any time when equipment is added or replaced. This process would be under the control of the installer, rather than occurring automatically, but should at least relieve the installer of the necessity to type in network addresses.

0.3.5 Defining a new type of block

A block's entry in the block list shows what type of block it is, represented by an object identifier (OID) (see 0.4.2) which is a globally unique value that identifies the block type definition.

The main requirement when adding a new type of block to the control framework is for its block type definition to follow the conditions below:

- the globally unique OID identifies a MIB table or group of MIB tables, with each table containing a variable number of rows.
- the table(s) are indexed using the block id to access control objects associated with individual instances of this block type.

In effect, the framework provides the entry point to controlling each block of functionality. The actual details of how to control that functionality will always need to be specified individually.

0.4 Management information base (MIB)

0.4.1 Objects

Communication between the management terminal and the managed unit is by the simple network management protocol (SNMP), which defines all management operations in terms of reads and writes on a hierarchically organized collection of variables, or "managed objects", known as a MIB.

Each object is identified by an OID which is a sequence of numbers; in the descriptions they are separated by dots, and there are also alphanumeric names which can be used instead. Identifiers of objects defined in one of this family of standards begin 1.0.62379.*p* if defined in part *p*, or 1.0.62379.*p.s* if defined in part *p-s*.

Each block is described by a group of objects (a "record"). These objects are the control parameters and status variables. For each type of block, the structure of the record is specified in one of the parts of IEC 62379 or (for product-specific or application-specific blocks) elsewhere. The connectivity is described by a table containing an identification of the output to which each input is connected (see `connectorTable` in 4.2.5).

Thus, the management terminal can discover what functionality a unit has and may be able to reprogramme some of it. The SNMP protocol dictates that a command to change an object is always confirmed by a message showing the new value of the object, so if a unit does not support the full range of possible values of a parameter it can choose the one nearest to the requested value and will report back to the management terminal exactly what it has done.

0.4.2 Other uses of OIDs

Sometimes OIDs are used to identify things other than objects. Each block type is represented by an OID; in this case, it is also the root (the first few numbers in the sequence) of the OIDs for all the objects in the record that describes each block of that type.

The OIDs are not confined to those specified in the various parts of IEC 62379; for product-specific blocks, implementers may define other types with OIDs rooted at, for example, 1.3.6.1.4.1.*n*, where *n* is the enterprise number of the manufacturer of the unit. A general-purpose management terminal which only recognized the standard OIDs would see these product-specific blocks as "black boxes"; it would recognize their connectivity but not be able to control or monitor their operation.

Media formats (audio, video, etc.) are also identified by OIDs. Here, again, OIDs not rooted at 1.0.62379 may be used for formats that are not defined in this family of standards; provided the sending and receiving devices both support the format, a call can be set up without the management terminal being able to recognize it, though the management terminal might not be able to display a user-friendly description of it.

0.4.3 Migration to XML

Increasingly, XML is being used as the interface to network management applications. However, communication with the management agents in the networked devices is usually through a gateway that translates between SNMP and XML, so that the managed unit only needs to support SNMP.

A future addition to IEC 62379 (amendment or additional part) might standardize the XML form; however, in that event, the underlying managed objects would remain the same in both forms.

0.5 Status broadcasts

0.5.1 Introduction

Status pages are messages containing structured values representing some internal state of a unit. Each page is organized into a fixed format of related information. A unit may define and support multiple types of status page.

Related status pages are collected together into groups called status broadcast groups. When a remote entity requests a status broadcast, it specifies which group it wants to receive. Status broadcast groups are identified by OIDs.

Status pages are the preferred method for regularly monitoring the state of a unit. Polling fields in the MIB put more load on both the unit and the network, because they require the unit to process an SNMP request on every occasion, rather than just once to set up the broadcast. If the same information is required at multiple locations, there will be a separate request from each, and multiple copies of the information must be sent, whereas with the broadcast only one copy is sent, being duplicated by the network as required to reach all its destinations.

This standard defines a number of status pages and groups. Other parts define their own status pages and groups. Manufacturers may also define product-specific status pages and groups.

0.5.2 Status page information sources

Status pages and groups may be associated either with a single block or with the unit as a whole.

Three pieces of information are required to initiate a status page broadcast call (other information may be required; however, this will be network-specific and specified in the relevant subpart of Part 5):

- the block id – of the block that is to be the source of the status broadcast group call (a null value is used for status broadcasts associated with the unit as a whole);
- the page group OID – of the particular status broadcast group to be produced;
- the required page rate – the rate at which the pages are generated.

If a unit supports multiple instances of a block type (for instance, an AES3 audio output, which supports an audio level status broadcast group), it is not required to implement the associated status broadcast group for each instance – it may implement it for just a subset of them.

0.5.3 Status page general format

The first two octets of a status page indicate the page type. Page type identifiers are required to be unique for all pages that are part of a given page group, but otherwise may be freely allocated by the organization or manufacturer that specifies the page content. The format of the rest of the page depends on the page type; the maximum length is 484 octets.

Numbers are coded in binary using a fixed number of bytes and big-endian. Text strings are in UTF-8.

0.6 Calls

The network is expected to provide the following two kinds of services.

- Fixed bit rate one-to-many service for media streams and status broadcasts, with guaranteed latency and throughput.
- "Best-effort" bidirectional one-to-one packet transfer service for control messages.

On an ATM network, these map onto CBR point-to-multipoint and UBR point-to-point calls, respectively.

On a connectionless (and stateless) network such as IP, there is no direct equivalent of the concept of an ATM "call". However, if the network is to provide the necessary quality of service (QoS) guarantees for media streams, there will need to be some kind of mechanism for allocating the resources needed for a stream. This mechanism must, in many ways, be similar to the call set-up process on connection-oriented networks.

In the case of the packet transfer service, which may well be connectionless at the network layer, for many applications there will be a relationship between the management terminal and the managed unit within which some "state" information persists between transactions. For instance, when updating software in the unit (see 0.9), only one management terminal can write a given memory area at a time. Thus a "session" will exist between the management terminal and the managed unit, which corresponds to a call on a connection-oriented network.

Associated with any media stream is "call identity" information which can include information about the stream itself, the point where it enters the system, and each destination. Destinations have an "importance" assigned to them, and it is normally only the most important destinations that are reported. More details are given in Clause A.4.

0.7 Privilege levels

Throughout IEC 62379, the concept of "privilege levels" is used to distinguish different kinds of user. This concept was developed for radio broadcasting studios, and the names of the levels reflect that but will also be useful in other applications.

Four privilege levels are defined:

- listener;
- operator;
- supervisor;
- maintenance.

Listener is the lowest privilege level, intended for use by those who wish to monitor audio or video signals passing through the unit (for example, someone who wishes to listen in on the output of a studio via their PC). Listeners can set up calls from audio and video sources to equipment which is local to them but cannot change anything that would affect the experience of other users.

Operator is the next privilege level, intended for use by those who are controlling the day-to-day operation of the unit (for example, a studio technical operator). Operators can change things which affect other users, such as the mix of signals that provides the output from a studio, or by issuing "pause", "seek", etc. commands to play-out equipment.

Supervisor is the next privilege level, intended for use by those who are controlling and maintaining the network such as a control room technical operator.

Maintenance is the highest privilege level, intended for use by those who need to perform tasks that might disrupt normal operation of the unit, such as updating firmware or causing the unit to enter a diagnostic mode.

Privilege levels are intended to be used for two purposes. The first is to allow management call capacity to be reserved for each category of caller, to prevent important management calls being blocked because too many lower-level calls are in progress. The second is to prevent callers from performing inappropriate control tasks, by limiting the commands accepted at lower levels.

To enable the latter functionality, every call has a privilege level associated with it, and a call may not be set up, modified, or torn down by a management call of lower privilege. For instance, an operator can set up calls with operator privilege which then cannot be affected by management calls that only have listener privilege, although they can be modified or torn down by other operators and by supervisors. Supervisors can set up calls which neither listeners nor operators can disturb; the connection between a continuity studio and the transmission chain might be an example.

This specification requires that at least one management call must be accepted at each privilege level at any given time. In practice, the call capacity that needs to be reserved for each level is likely to depend on the context within which the unit is used, so a means of configuring this is also specified. It is intended that any unreserved call capacity will be allocated on a first-come first-served basis.

0.8 Automation

The automation mechanism allows for single or multiple values to be set at a given time. The actual scheme uses a list of automation events where each event consists of a time, the OID of an object in the MIB, and the value to put in it at that time.

This removes the uncertainty introduced by the best-effort service on the network; the controller can add the event to the table far enough in advance to give time to repeat the request if it is lost. Also, it can programme a number of events to occur simultaneously.

Also, multiple events can be associated so they occur one after the other much like a macro.

0.9 Uploading software

This standard includes (in 4.2.8 and 5.2) a mechanism for updating software and other configuration information in units supporting the common control interface.

The intention is for a management terminal to be able to update software in a large number of different pieces of equipment from different manufacturers without needing to run manufacturer-specific applications.

The MIB objects defined in 4.2.8 are intended to provide a model which is common to all the various kinds of memory that might be used in the managed unit. A unit may contain more than one "class" of memory; different classes may be physically different, for instance, flash memory and rotating magnetic memory, and/or reserved for different kinds of data, for instance, software and audio clips.

EXAMPLE 1: Simple system using flash memory

Flash memory is composed of blocks, typically 64K bytes each. An individual byte can be written provided this does not involve changing any bit from 0 to 1. A whole block can be "erased", after which every bit in the block is a 1.

Each area consists of either a single block or several adjacent blocks; a few bytes are reserved to hold the length, type, and serial number. The "handle" which identifies an area is the high part of the address of the first byte of the area.

Deletion is by erasing all the blocks that comprise the area, which may take several seconds for some flash memory chips. After deletion, if there is an adjacent empty area the two areas are merged to form a single empty area (so one of them will disappear from the table).

If there is no other memory into which components can be loaded, all areas should be class 1.

EXAMPLE 2: Disc with filing system

Each file is an "area", and there is another (single) area containing all the free space. In the case of a Unix filing system, the "handle" might be the file's inode number.

If the product has both disc and flash, it might identify the flash as class 2 and the disc as class 1; or it might divide the disc into separate partitions identified as classes 3, 4, etc.

One object for each area shows the `access` permitted, i.e. whether it may be written and/or erased. Whether an area is included in the table, and the access permitted if so, may depend on the privilege level. The management terminal may be able to change the `access`, but usually this will be controlled by the managed unit; for instance, it may set all areas required to load the software currently running to read-only (i.e. not writable), and the rest to full access, so that new software can be uploaded into currently unused areas, but the current software cannot be overwritten until the new software has been completely loaded.

Another is the `status` which shows what operation is being performed on the area. The management terminal requests deletion of an area by setting its `status` to "erasing"; the managed unit will then delete its current contents and set the `status` to "empty". It may then amalgamate it with another empty area in the same class of memory.

An area also has a `serialNumber`; new software is given the serial number next in sequence after that for the current software. When the unit is restarted, the (valid) software with the most recent serial number is loaded; the procedures in 5.2.3 ensure that partly loaded software will not be valid, for instance, if the unit is restarted before the uploading process is complete. Thus, if the unit is restarted before the new software has been completely loaded, the old software will run; if after, the new software will run.

Two methods of software distribution are supported. The software may be supplied as a package, for instance, on a CD or by e-mailing a ZIP file, as specified in 5.2.6.1; when new software is available, a new package must be distributed. Alternatively, a "product file" containing a URL may be supplied, and the software downloaded over the Internet as specified in 5.2.6.2. It is made easy for the management terminal to check whether new software is available.

0.10 Encapsulation of messages

Throughout this family of standards, the word "message" is used to mean an octet string which is conveyed across the network as a single unit. On an IP network, it will be the "data" part of a packet or datagram, i.e. excluding all the headers and framing. In the case of an ATM network, it will normally be an AAL5-SDU.

Thus on an IP network SNMP messages are packaged in the normal way for SNMP, i.e. using UDP over IP. On an ATM network they are packaged directly in AAL5, in the same way as in ILMI.

0.11 Further information

Additional explanations of some aspects of this standard are given in Annex A.

COMMON CONTROL INTERFACE FOR NETWORKED DIGITAL AUDIO AND VIDEO PRODUCTS –

Part 1: General

1 Scope

This part of IEC 62379 specifies a control interface for products which convey audio and/or video across digital networks.

Separate documents specify items specific to a particular type of traffic, a particular networking technology, or a particular class of application.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 646:1991, *Information technology – ISO 7-bit coded character set for information interchange*

ISO/IEC 8824-1:2002, *Information technology – Abstract Syntax Notation One (ASN.1): Specification of basic notation*

IEEE Std 802:2001, *IEEE Standard for Local and Metropolitan Area Networks: Overview and Architecture*

RFC1157, *Simple Network Management Protocol (SNMP)* (IETF Standard #15 STANDARD)

RFC 1441, *Introduction to version 2 of the Internet-standard Network Management Framework (IETF)*

RFC 3411-3418, *Simple Network Management Protocol version 3* (IETF Standard #62)

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

coordinated universal time

UTC

time scale which forms the basis of a coordinated dissemination of standard frequencies and time signals (see ITU-R Recommendation TF.460)

3.2

call

either a point-to-point call or a point-to-multipoint call