

Edition 2.0 2010-03

INTERNATIONAL STANDARD



Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office 3, rue de Varembé CH-1211 Geneva 20 Switzerland

Email: inmail@iec.ch Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub
- The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.
- IEC Just Published: www.iec.ch/online news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

■ Electropedia: <u>www.electropedia.org</u>

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

■ Customer Service Centre: www.iec.ch/webstore/custserv
If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch Tel.: +41 22 919 02 11 Fax: +41 22 919 03 00



Edition 2.0 2010-03

INTERNATIONAL STANDARD



Communication networks and systems for power utility automation – Part 7-4: Basic communication structure – Compatible logical node classes and data object classes

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRICE CODE

ISBN 2-8318-1082-0

CONTENTS

FΟ	REW(ORD		8
IN	rodi	UCTION		10
1	Scope			11
2	Norm	native re	ferences	12
3	Term	ns and d	efinitions	13
4	Abbr	eviated	terms	13
5	Logical node classes			
•	5.1 Logical node groups			
	5.2 Interpretation of logical node tables			
	5.3		n logical nodes LN group: L	
	0.0	5.3.1	LN relationships	
		5.3.2	LN: Physical device information Name: LPHD	
		5.3.3	LN: common logical node Name: Common LN	
		5.3.4	LN: Logical node zero Name: LLN0	
		5.3.5	LN: Physical communication channel supervision Name: LCCH	
		5.3.6	LN: GOOSE subscription Name: LGOS	
		5.3.7	LN: Sampled value subscription Name: LSVS	25
		5.3.8	LN: Time management Name: LTIM	
		5.3.9	LN: Time master supervision Name: LTMS	26
		5.3.10	LN: Service tracking Name: LTRK	27
	5.4	Logica	I nodes for automatic control LN Group: A	27
		5.4.1	Modelling remarks	
		5.4.2	LN: Neutral current regulator Name: ANCR	27
		5.4.3	LN: Reactive power control Name: ARCO	
		5.4.4	LN: Resistor control Name: ARIS	
		5.4.5	LN: Automatic tap changer controller Name: ATCC	
		5.4.6	LN: Voltage control Name: AVCO	
	5.5	•	I nodes for control LN Group: C	
		5.5.1	Modelling remarks	
		5.5.2	LN: Alarm handling Name: CALH	
		5.5.3	LN: Cooling group control Name: CCGR	
		5.5.4	LN: Interlocking Name: CILO	
		5.5.5	LN: Point-on-wave switching Name: CPOW	
		5.5.6	LN: Switch controller Name: CSWI	
	F 6	5.5.7	LN: Synchronizer controller Name: CSYNI nodes for functional blocks LN group F	
	5.6	5.6.1	Modelling remarks	
		5.6.2	LN: Counter Name: FCNT	
		5.6.3	LN: Curve shape description Name: FCSD	
		5.6.4	LN: Generic filter Name: FFIL	
		5.6.5	LN: Control function output limitation Name: FLIM	
		5.6.6	LN: PID regulator Name: FPID	
		5.6.7	LN: Ramp function Name: FRMP	
		5.6.8	LN: Set-point control function Name: FSPT	
		5.6.9	LN: Action at over threshold Name: FXOT	
			LN: Action at under threshold Name: FXUT	

5.7	Logical nodes for generic references LN Group: G	
	5.7.1 Modelling remarks	
	5.7.2 LN: Generic automatic process control Name: GAPC	41
	5.7.3 LN: Generic process I/O Name: GGIO	42
2	5.7.4 LN: Generic log Name: GLOG	42
	5.7.5 LN: Generic security application Name: GSAL	43
5.8	Logical nodes for interfacing and archiving LN Group: I	43
	5.8.1 Modelling remarks	43
	5.8.2 LN: Archiving Name: IARC	43
	5.8.3 LN: Human machine interface Name: IHMI	44
	5.8.4 LN: Safety alarm function Name: ISAF	44
	5.8.5 LN: Telecontrol interface Name: ITCI	45
	5.8.6 LN: Telemonitoring interface Name: ITMI	45
	5.8.7 LN: Teleprotection communication interfaces Name: ITPC	45
5.9	Logical nodes for mechanical and non-electric primary equipment LN group	
	K	46
	5.9.1 Modelling remarks	46
	5.9.2 LN: Fan Name: KFAN	
	5.9.3 LN: Filter Name: KFIL	47
	5.9.4 LN: Pump Name: KPMP	48
	5.9.5 LN: Tank Name: KTNK	48
	5.9.6 LN: Valve control Name: KVLV	49
5.10	Logical nodes for metering and measurement LN Group: M	
	5.10.1 Modelling remarks	50
	5.10.2 LN: Environmental information Name: MENV	50
	5.10.3 LN: Flicker measurement name Name: MFLK	51
	5.10.4 LN: Harmonics or interharmonics Name: MHAI	52
	5.10.5 LN: Non-phase-related harmonics or interharmonics Name: MHAN	
	5.10.6 LN: Hydrological information Name: MHYD	55
	5.10.7 LN: DC measurement Name: MMDC	55
	5.10.8 LN: Meteorological information Name: MMET	55
	5.10.9 LN: Metering Name: MMTN	56
	5.10.10 LN: Metering Name: MMTR	57
	5.10.11 LN: Non-phase-related measurement Name: MMXN	57
	5.10.12 LN: Measurement Name: MMXU	57
	5.10.13 LN: Sequence and imbalance Name: MSQI	59
	5.10.14 LN: Metering statistics Name: MSTA	60
5.11		60
	5.11.1 Modelling remarks	60
	5.11.2 LN: Differential Name: PDIF	61
	5.11.3 LN: Direction comparison Name: PDIR	62
	5.11.4 LN: Distance Name: PDIS	63
	5.11.5 LN: Directional overpower Name: PDOP	63
	5.11.6 LN: Directional underpower Name: PDUP	64
	5.11.7 LN: Rate of change of frequency Name: PFRC	64
	5.11.8 LN: Harmonic restraint Name: PHAR	65
	5.11.9 LN: Ground detector Name: PHIZ	65
	5.11.10 LN: Instantaneous overcurrent Name: PIOC	66
	5.11.11 LN: Motor restart inhibition Name: PMRI	66
	5.11.12 LN: Motor starting time supervision Name: PMSS	67

	5.11.13 LN: Over power factor Name: POPF	67
	•	
	5.11.14 LN: Phase angle measuring Name: PPAM	
	5.11.15 LN: Rotor protection Name: PRTR	
	5.11.16 LN: Protection scheme Name: PSCH	
	5.11.17 LN: Sensitive directional earthfault Name: PSDE	
	5.11.18 LN: Transient earth fault Name: PTEF	
	5.11.19 LN: Thyristor protection Name: PTHF	
	5.11.20 LN: Time overcurrent Name: PTOC	
	5.11.21 LN: Overfrequency Name: PTOF	
	5.11.22 LN: Overvoltage Name: PTOV	72
	5.11.23 LN: Protection trip conditioning Name: PTRC	72
	5.11.24 LN: Thermal overload Name: PTTR	73
	5.11.25 LN: Undercurrent Name: PTUC	73
	5.11.26 LN: Underfrequency Name: PTUF	74
	5.11.27 LN: Undervoltage Name: PTUV	74
	5.11.28 LN: Underpower factor Name: PUPF	75
	5.11.29 LN: Voltage controlled time overcurrent Name: PVOC	75
	5.11.30 LN: Volts per Hz Name: PVPH	
	5.11.31 LN: Zero speed or underspeed Name: PZSU	
5.12	Logical nodes for power quality events LN Group: Q	
	5.12.1 Modelling remarks	
	5.12.2 LN: Frequency variation Name: QFVR	
	5.12.3 LN: Current transient Name: QITR	
	5.12.4 LN: Current unbalance variation Name: QIUB	
	5.12.5 LN: Voltage transient Name: QVTR	
	5.12.6 LN: Voltage unbalance variation Name: QVUB	
	5.12.7 LN: Voltage variation Name: QVVR	
5 13	Logical nodes for protection related functions LN Group: R	
0.10	5.13.1 Modelling remarks	
	5.13.2 LN: Disturbance recorder channel analogue Name: RADR	
	5.13.3 LN: Disturbance recorder channel binary Name: RBDR	
	5.13.4 LN: Breaker failure Name: RBRF	
	5.13.5 LN: Directional element Name: RDIR	
	5.13.7 LN: Disturbance record handling Name: RDRS	
	5.13.8 LN: Fault locator Name: RFLO	
	5.13.9 LN: Differential measurements Name: RMXU	
	5.13.10 LN: Power swing detection/blocking Name: RPSB	
	5.13.11 LN: Autoreclosing Name: RREC	86
	5.13.12 LN: Synchronism-check Name: RSYN	86
5.14	Logical nodes for supervision and monitoring LN Group: S	
	5.14.1 Modelling remarks	
	5.14.2 LN: Monitoring and diagnostics for arcs Name: SARC	
	5.14.3 LN: Circuit breaker supervision Name: SCBR	
	5.14.4 LN: Insulation medium supervision (gas) Name: SIMG	
	5.14.5 LN: Insulation medium supervision (liquid) Name: SIML	
	5.14.6 LN: Tap changer supervision Name: SLTC	91
	5.14.7 LN: Supervision of operating mechanism Name: SOPM	91
	5.14.8 LN: Monitoring and diagnostics for partial discharges Name: SPDC	92

	Name: SPTR93
5.14.10 LN: Circuit switch supervision Na	
5.14.11 LN: Temperature supervision Nar	
5.14.12 LN: Vibration supervision Name:	
5.15 Logical nodes for instrument transformers a	·
	90
	90
	XD90
5.15.4 LN: Current transformer Name: T	
	9
	99
	98
	99
5.15.9 LN: Humidity Name: THUM 5.15.10 LN: Media level Name: TLVL	99
5.15.10 LN: Media lever Name: TEVE 5.15.11 LN: Magnetic field Name: TMGF .	
5.15.11 LN: Magnetic field Name: TMGF. 5.15.12 LN: Movement sensor Name: TM	
5.15.12 LN: Movement sensor Name: TM 5.15.13 LN: Position indicator Name: TPC	
5.15.14 LN: Pressure sensor Name: TPR	
5.15.15 LN: Rotation transmitter Name: T	
5.15.16 LN: Sound pressure sensor Name	
5.15.17 LN: Temperature sensor Name: T	
5.15.18 LN: Mechanical tension / stress N	
5.15.19 LN: Vibration sensor Name: TVBI	
5.15.20 LN: Voltage transformer Name: T	
5.15.21 LN: Water acidity Name: TWPH	
5.16 Logical nodes for switchgear LN Group: X.	
5.16.1 Modelling remarks	
5.16.2 LN: Circuit breaker Name: XCBR	
5.16.3 LN: Circuit switch Name: XSWI	
5.17 Logical nodes for power transformers LN 0	
5.17.1 Modelling remarks	10
5.17.2 LN: Earth fault neutralizer (Petersen	coil) Name: YEFN103
5.17.3 LN: Tap changer Name: YLTC	107
5.17.4 LN: Power shunt Name: YPSH	108
5.17.5 LN: Power transformer Name: YPT	R108
5.18 Logical nodes for further power system equi	pment LN Group: Z109
5.18.1 Modelling remarks	109
5.18.2 LN: Auxiliary network Name: ZAX	N109
	109
_	110
5.18.5 LN: Power cable Name: ZCAB	110
•	11:
	11
	11
	IL112
5.18.10 LN: Power overhead line Name: 2	
5.18.11 LN: Motor Name: ZMOT	
5.18.12 LN: Reactor Name: ZREA	11;

5.18.13 LN: Resistor Name: ZRES	114
5.18.14 LN: Rotating reactive component Name: ZRRC	
5.18.15 LN: Surge arrestor Name: ZSAR	
5.18.16 LN: Semi-conductor controlled rectifier Name: ZSCR	
5.18.17 LN: Synchronous machine Name: ZSMC	
5.18.18 LN: Thyristor controlled frequency converter Name: ZTCF	
5.18.19 LN: Thyristor controlled reactive component Name: ZTCR	
Annex A (normative) Interpretation of mode and behaviour	
Annex B (normative) Local / Remote concept	
Annex C (informative) Deprecated logical node classes	
Annex D (informative) Relationship between this standard and IEC 61850-5	
Annex E (informative) Algorithms used in logical nodes for automatic control	162
Annex F (normative) Statistical calculation	
Annex G (normative) Functional relationship of data objects of autorecloser RREC	
Annex H (normative) SCL enumerations	
Bibliography	
Figure 1 – Overview of this standard	12
Figure 2 – LOGICAL NODE relationships	21
Figure E.1 – Example of curve based on an indexed gate position providing water flow	162
Figure E.2 – Example of curve based on an indexed guide vane position (x axis) vs. net head (y axis) giving an interpolated runner blade position (Z axis)	163
Figure E.3 – Example of a proportional-integral-derivate controller	164
Figure E.4 – Example of a power stabilisation system	165
Figure E.5 – Example of a ramp generator	165
Figure E.6 – Example of an interface with a set-point algorithm	166
Figure F.1 – Statistical calculation of a vector	168
Figure F.2 – Examples of statistical calculations	170
Figure F.2 – Examples of statistical calculations	172
Table 1 – List of logical node groups	
Table 1 – List of logical node groups	19
Table 2 – Interpretation of logical node tables	
Table 3 – Relation between IEC 61850-5 and IEC 61850-7-4 for automatic control LNs	
Table 4 – Relation between IEC 61850-5 and IEC 61850-7-4 for control LNs	
Table 5 – Conditional attributes in FPID	39
Table 6 – Relation between IEC 61850-5 and IEC 61850-7-4 for metering and measurement LNs	50
Table 7 – Relation between IEC 61850-5 and IEC 61850-7-4 (this standard) for protection L	Ns 60
Table 8 – Relation between IEC 61850-5 and IEC 61850-7-4 for protection related LN	80
Table 9 – Relation between IEC 61850-5 and IEC 61850-7-4 for supervision and monitoring LNs	87
Table 10 – Description of data objects	
Table A.1 – Values of mode and behaviour	
Table A.2 – Definition of mode and behaviour	

Table B.1 – Relationship between Loc/Rem data objects and control authority	

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMUNICATION NETWORKS AND SYSTEMS FOR POWER UTILITY AUTOMATION –

Part 7-4: Basic communication structure – Compatible logical node classes and data object classes

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61850-7-4 has been prepared by IEC technical committee 57: Power systems management and associated information exchange.

This second edition cancels and replaces the first edition published in 2003. It constitutes a technical revision.

Future standards in this series will carry the new general title as cited above. Titles of existing standards in this series will be updated at the time of the next edition.

The major technical changes with regard to the previous edition are as follows:

- corrections and clarifications according to information letter "IEC 61850-technical issues by the IEC TC 57" (see document 57/963/INF, 2008-07-18);
- extensions for new logical nodes for the power quality domain;

- extensions for the model for statistical and historical statistical data;
- extensions regarding IEC 61850-90-1 (substation-substation communication);
- extensions for new logical nodes for monitoring functions according to IEC 62271;
- new logical nodes from IEC 61850-7-410 and IEC 61850-7-420 of general interest.

The text of this standard is based on the following documents:

FDIS	Report on voting		
57/1045/FDIS	57/1051/RVD		

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The content of this part of IEC 61850 is based on existing or emerging standards and applications. In particular the definitions are based upon:

- the specific data objects types defined in IEC 60870-5-101 and IEC 60870-5-103;
- the common class definitions from the Utility Communication Architecture 2.0: Generic Object Models for Substation and Feeder Equipment (GOMSFE) (IEEE TR 1550);
- CIGRE Report 34-03, Communication requirements in terms of data flow within substations, December 1996.

A list of all parts of the IEC 61850 series under the general title *Communication networks and systems in substations*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- · reconfirmed,
- · withdrawn,
- · replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

5

INTRODUCTION

This part of IEC 61850 is part of a set of standards, the IEC 61850 series. IEC 61850 defines communication networks and systems for power utility automation, and more specially the communication architecture for subsystems such as substation automation systems. The sum of all subsystems may result also in the description of the communication architecture for the overall power system management. The defined architecture provided in specific parts of IEC 61850-7-x gives both a power utility specific data model and a substation domain specific data model with abstract definitions of data objects classes and services independently from the specific protocol stacks, implementations, and operating systems. The mapping of these abstract classes and services to communication stacks is outside the scope of IEC 61850-7-x and may be found in IEC 61850-8-x and in IEC 61850-9-x.

IEC 61850-7-1 gives an overview of the basic communication architecture to be used for all applications in the power system domain. IEC 61850-7-3 defines common attribute types and common data classes related to all applications in the power system domain. The attributes of the common data classes may be accessed using services defined in IEC 61850-7-2. These common data classes are used in this part to define the compatible data object classes.

To reach interoperability, all data objects in the data model need a strong definition with regard to syntax and semantics. The semantics of the data objects is mainly provided by names assigned to common logical nodes defined in this part and the data objects they contain, as defined in this basic part, and dedicated logical nodes defined in domain specific parts such as for hydro power control systems. Interoperability is easiest if as much as possible of the data objects are defined as mandatory. Because of different approaches and technical features, some data objects, especially settings, were declared as optional in this edition of the standard. There are also data objects which were declared as conditional, i.e. they will become mandatory under some well-defined conditions. After some experience has been gained with this standard, this decision may be reviewed in the next edition of this part.

It should be noted that data objects with full semantics are only one of the elements required to achieve interoperability. The standardized access to the data objects is defined in compatible, power utility and domain specific services (see IEC 61850-7-2). Since data objects and services are hosted by devices (IED), a proper device model is also needed. To describe both the device capabilities and the interaction of the devices in the related system, a configuration language is also needed, as defined in IEC 61850-6 by the substation configuration description language (SCL).

The compatible logical node name and data object name definitions found in this part and the associated semantics are fixed. The syntax of the type definitions of all data objects classes is governed by abstract definitions provided in IEC 61850-7-2 and IEC 61850-7-3. Not all features of logical nodes are listed in this part; for example, data sets and logs are covered in IEC 61850-7-2.

COMMUNICATION NETWORKS AND SYSTEMS FOR POWER UTILITY AUTOMATION –

Part 7-4: Basic communication structure – Compatible logical node classes and data object classes

1 Scope

This part of IEC 61850 specifies the information model of devices and functions generally related to common use regarding applications in systems for power utility automation. It also contains the information model of devices and function-related applications in substations. In particular, it specifies the compatible logical node names and data object names for communication between intelligent electronic devices (IED). This includes the relationship between logical nodes and data objects.

The logical node names and data object names defined in this document are part of the class model introduced in IEC 61850-7-1 and defined in IEC 61850-7-2. The names defined in this document are used to build the hierarchical object references applied for communicating with IEDs in systems for power utility automation and, especially, with IEDs in substations and on distribution feeders. The naming conventions of IEC 61850-7-2 are applied in this part.

To avoid private, incompatible extensions, this part specifies normative naming rules for multiple instances and private, compatible extensions of logical node (LN) classes and data object names. Any definition is based on IEC 61850 or on referenced well identified public documents.

This part does not provide tutorial material. It is recommended to read parts IEC 61850-5 and IEC 61850-7-1 first, in conjunction with IEC 61850-7-3, and IEC 61850-7-2.

This standard is applicable to describe device models and functions of substation and feeder equipment. The concepts defined in this standard are also applied to describe device models and functions for:

- · substation-to-substation information exchange,
- substation-to-control centre information exchange,
- power plant-to-control centre information exchange,
- information exchange for distributed generation,
- information exchange for distributed automation, or
- · information exchange for metering.

Figure 1 provides a general overview of this standard. The groups of logical nodes defined in this standard are shown in Figure 1, ordered according to some semantic meaning, for instance different control levels such as plant level, unit level, etc. For convenience, the logical nodes are defined below in alphabetical order.

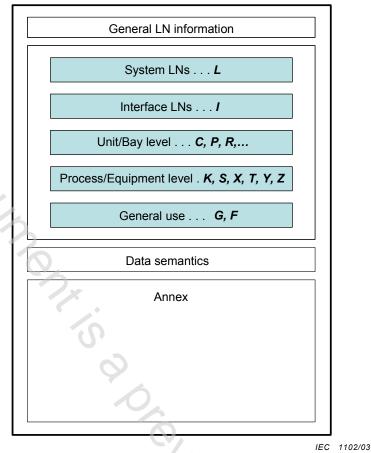


Figure 1 – Overview of this standard

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60270:2000, High-voltage test techniques – Partial discharge measurements

IEC 61000-4-7:2002, Electromagnetic compatibility (EMC) – Part 4-7: Testing and measurement techniques – General guide on harmonics and interharmonics measurements and instrumentation, for power supply systems and equipment connected thereto

IEC 61000-4-15, Electromagnetic compatibility (EMC) – Part 4-15: Testing and measurement techniques – Flickermeter – Functional and design specifications

IEC 61850-2, Communication networks and systems in substations - Part 2: Glossary

IEC 61850-5, Communication networks and systems in substations – Part 5: Communication requirements for functions and device models

IEC 61850-7-1:____1, Communication networks and systems for power utility automation – Part 7-1: Basic communication structure – Principles and models

¹ To be published.

IEC 61850-7-2:____2, Communication networks and systems for power utility automation – Part 7-2: Basic information and communication structure – Abstract communication service interface (ACSI)

IEC 61850-7-3:_____3, Communication networks and systems for power utility automation – Part 7-3: Basic communication structure – Common data classes

IEC 61850-9-2, Communication networks and systems for power utility automation – Part 9-2: Specific Communication Service Mapping (SCSM) – Sampled values over ISO/IEC 8802-3

IEEE C37.111:1999, IEEE Standard Common Format for Transient Data Exchange (COMTRADE) for Power Systems

IEEE 519:1992, IEEE Recommended Practises and Requirements for Harmonic Control in Electrical Power Systems

IEEE C37.2:1996, Electrical Power System Device Function Numbers and Contact Designation

IEEE 1459:2000, IEEE Trial-Use Standard Definitions for the Measurement of Electric Power Quantities Under Sinusoidal, Nonsinusoidal, Balanced, or Unbalanced Conditions

IEEE 1588, Precision clock synchronization protocol for networked measurement and control systems

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61850-2 and IEC 61850-7-2 apply.

4 Abbreviated terms

The following terms are used to build concatenated data object names. For example, ChNum is constructed by using two terms "Ch" which stands for "Channel" and "Num" which stands for "Number". Thus the concatenated name represents a "channel number".

Term	Description	Term	Description
Α	Current	Alm	Alarm
Acs	Access	Amp	Current non-phase-related
Abr	Abrasion	An	Analogue
Abs	Absolute	Ang	Angle
AC	AC, alternating current	Ap	Access point
Acc	Accuracy	Арр	Apparent
Act	Action, activity	Arc	Arc
Acu	Acoustic	Area	Area
Adj	Adjustment	Auth	Authorisation
Adp	Adapter, adaptation	Auto	Automatic
Age	Ageing	Aux	Auxiliary
Air	Air	Av	Average
Alg	Algorithm	AWatt	Wattmetric component of current

² To be published.

³ To be published.