

---

---

**Road vehicles — In-vehicle Ethernet —**  
**Part 2:**  
**Common physical entity requirements**

*Véhicules routiers — Ethernet embarqué —*

*Partie 2: Exigences de l'entité physique commune*



This document is a preview generated by EKO



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b>	<b>iv</b>
<b>Introduction</b>	<b>v</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>1</b>
<b>4 Abbreviated terms</b>	<b>2</b>
<b>5 Media independent interfaces</b>	<b>2</b>
5.1 General	2
5.2 RGMII	2
5.2.1 General	2
5.2.2 RGMII signals	3
5.2.3 Electrical signal voltage level	6
5.2.4 Electrical signal timing	7
5.2.5 Mapping GMII signals into RGMII electrical signals	12
<b>6 Wake-up and synchronised link sleep functionality</b>	<b>13</b>
6.1 General	13
6.2 Power state, algorithms, and service interfaces	13
6.3 Neighbour physical entities	16
6.4 Synchronised link sleep algorithm	17
6.5 Wake-up algorithm	18
6.6 Wake I/O block	18
6.7 Physical entity power state	19
6.7.1 Physical entity power state variables	19
6.8 PHY service interface	19
6.8.1 PHY_LinkSleep.request	19
6.8.2 PHY_LinkSleep.indication	20
6.8.3 PHY_WakeUp.request	20
6.8.4 PHY_WakeUp.indication	20
6.8.5 PHY_ConfigSleepReject.request	21
6.8.6 PHY_SleepStatus.indication	21
6.8.7 PHY_LinkSleepRequestEvent.indication	21
6.8.8 PHY_LinkSleepRequestAbort.request	22
6.9 Neighbour service interface	22
6.9.1 NPHY_WakeUpForward.request	22
6.9.2 NPHY_WakeUpForward.indication	22
6.10 Timing requirements	23
6.10.1 Synchronised link sleep algorithm timing requirements	23
6.10.2 Wake-up algorithm timing requirements	23
6.11 Quiescence current	27
<b>Bibliography</b>	<b>28</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 21111 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The ISO 21111 series includes in-vehicle Ethernet requirements and test plans that are disseminated in other International Standards and complements them with additional test methods and requirements. The resulting requirement and test plans are structured in different documents following the Open Systems Interconnection (OSI) reference model and grouping the documents that depend on the physical media and bit rate used.

In general, the Ethernet requirements are specified in ISO/IEC/IEEE 8802-3. The ISO 21111 series provides supplemental specifications (e.g. wake-up, I/O functionality), which are required for in-vehicle Ethernet applications. In road vehicles, Ethernet networks are used for different purposes requiring different bit-rates. Currently, the ISO 21111 series specifies the 1-Gbit/s optical and 100-Mbit/s electrical physical layer.

The ISO 21111 series contains requirement specifications and test methods related to the in-vehicle Ethernet. This includes requirement specifications for physical layer entity (e.g. connectors, physical layer implementations) providers, device (e.g. electronic control units, gateway units) suppliers, and system (e.g. network systems) designers. Additionally, there are test methods specified for conformance testing and for interoperability testing.

Safety (electrical safety, protection, fire, etc.) and electromagnetic compatibility (EMC) requirements are out of the scope of the ISO 21111 series.

The structure of the specifications given in the ISO 21111 series complies with the Open Systems Interconnection (OSI) reference model specified in ISO/IEC 7498-1<sup>[1]</sup> and ISO/IEC 10731<sup>[5]</sup>.

ISO 21111-1 defines the terms which are used in this series of standards and provides an overview of the standards for in-vehicle Ethernet including the complementary relations to ISO/IEC/IEEE 8802-3, the document structure, type of physical entities, in-vehicle Ethernet specific functionalities and so on.

ISO 21111-2 specifies the interface between reconciliation sublayer and physical entity including reduced gigabit media independent interface (RGMI), and the common physical entity wake-up and synchronised link sleep functionalities, independent from physical media and bit rate.

This document specifies supplemental requirements to a physical layer capable of transmitting 1-Gbit/s over plastic optical fibre compliant with ISO/IEC/IEEE 8802-3, with specific application to communications inside road vehicles, and a test plan for physical entity conformance testing.

ISO 21111-4 specifies the optical components requirements and test methods for 1-Gbit/s optical in-vehicle Ethernet.

ISO 21111-5 specifies, for 1-Gbit/s optical in-vehicle Ethernet, requirements on the physical layer at system level, requirements on the interoperability test set-ups, the interoperability test plan that checks the requirements for the physical layer at system level, requirements on the device-level physical layer conformance test set-ups, and device-level physical layer conformance test plan that checks a set of requirements for the OSI physical layer that are relevant for device vendors.

ISO 21111-6 specifies advanced features of an ISO/IEC/IEEE 8802-3 in-vehicle Ethernet physical layer (often also called transceiver), e.g. for diagnostic purposes for in-vehicle Ethernet physical layers. It specifies advanced physical layer features, wake-up and sleep features, physical layer test suite, physical layer control requirements and conformance test plan, physical sublayers test suite and physical sublayers requirements and conformance test plan.

ISO 21111-7 specifies the implementation for ISO/IEC/IEEE 8802-3:2017/Amd 1:2017, which defines the interface implementation for automotive applications together with requirements on components used to realize this Bus Interface Network (BIN). ISO 21111-7 also defines further testing and system requirements for systems implemented according to the system specification. In addition, ISO 21111-7 defines the channels for tests of transceivers with a test wiring harness that simulates various electrical communication channels.

ISO 21111-8 specifies the transmission media, the channel performance and the tests for ISO/IEC/IEEE 8802-3 in-vehicle Ethernet.

ISO 21111-9 specifies the data link layer requirements and conformance test plan. It specifies the requirements and test plan for devices and systems with bridge functionality.

ISO 21111-10 specifies the application to network layer requirements and test plan. It specifies the requirements and test plan for devices and systems that include functionality related with OSI layers from 3 to 7.

Figure 1 shows the parts of the ISO 21111 series and the document structure.

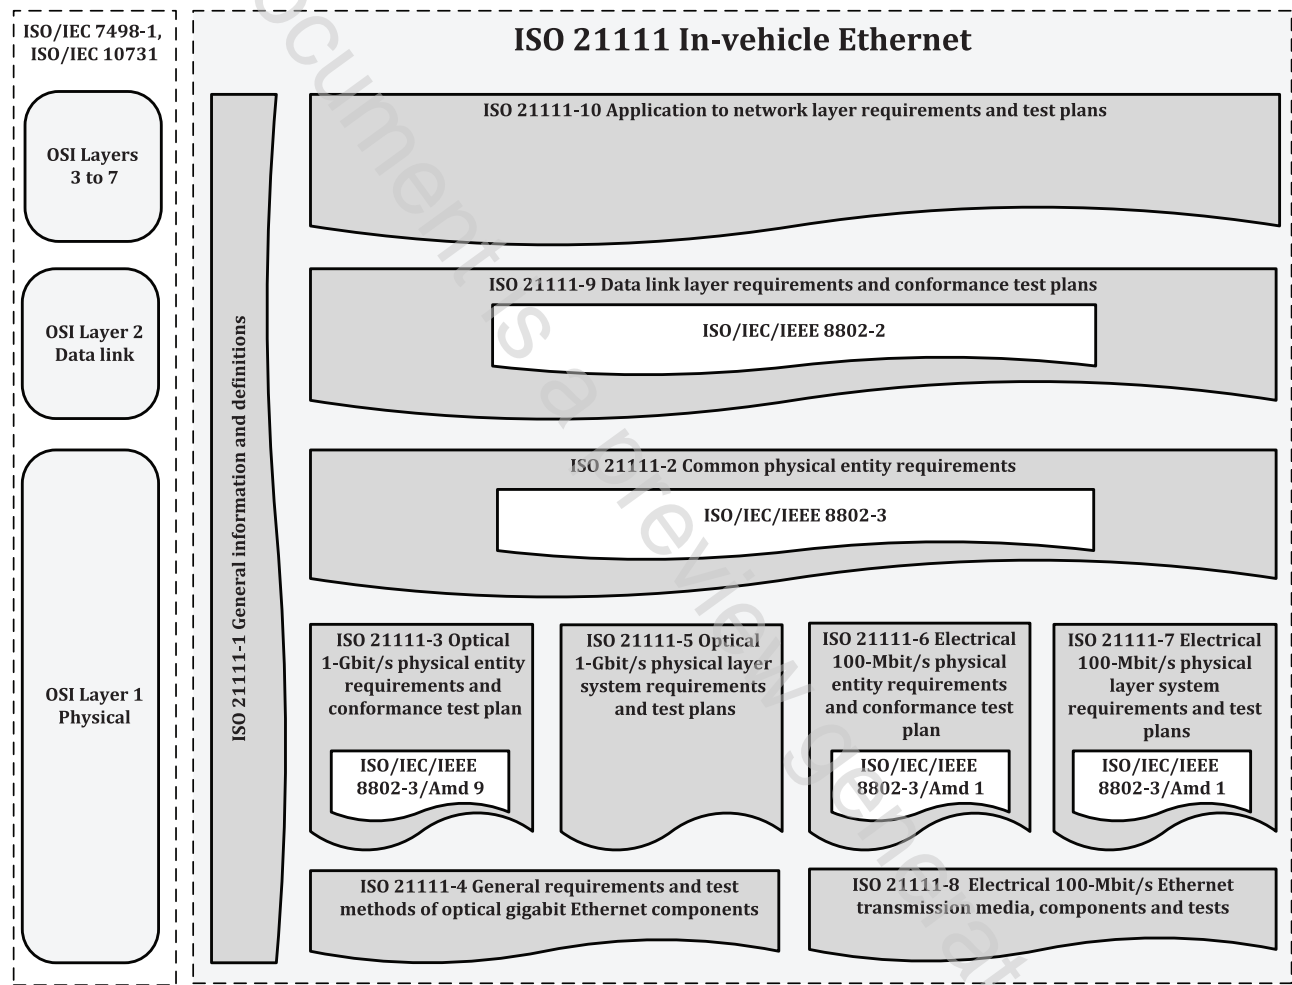


Figure 1 — In-vehicle Ethernet document reference according to the OSI model

# Road vehicles — In-vehicle Ethernet —

## Part 2:

## Common physical entity requirements

### 1 Scope

This document specifies the following items to complement ISO/IEC /IEEE 8802-3:

- interface between reconciliation sublayer and physical entity including reduced gigabit media independent interface (RGMI);
- common physical entity wake-up and synchronised link sleep functionalities independent from physical media and transmission bit rate.

The optical and electrical component requirements and test methods for optical and electrical transmission of in-vehicle Ethernet are not in the scope of this document.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21111-1, *Road vehicles — In-vehicle Ethernet — Part 1: General information and definitions*

JEDEC – JESD8C.01:2006, *Interface Standard for Nominal 3 V/3.3 V Supply Digital Integrated Circuits*

JEDEC – JESD8-5A:2006, *2.5 V ± 0.2 V (Normal Range) and 1.8 V – 2.7 V (Wide Range) Power Supply Voltage and Interface Standard for Nonterminated Digital Integrated Circuits*

JEDEC – JESD8-7A:1997, *1.8 V ± 0.15 V (Normal Range) and 1.2 V – 1.95 V (Wide Range) Power Supply Voltage and Interface Standard for Nonterminated Digital Integrated Circuits*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21111-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

#### 3.1

#### double data rate

#### DDR

data transmission scheme, in which the data is transferred on both the rising and falling edges of the clock signal

#### 3.2

#### event

piece of management information exchanged between a calling physical entity and a called physical entity