
Solid recovered fuels — Methods for sampling

Combustibles solides de récupération — Méthodes d'échantillonnage



This document is a preview generated by EKO



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols	7
5 Principle	8
6 Development of a sampling plan	8
6.1 Principle.....	8
6.2 Definition of overall objectives.....	9
6.3 Definition of a lot and determining lot size.....	9
6.3.1 General.....	9
6.3.2 Definition of a lot in case of sampling from a material flow.....	10
6.3.3 Definition of a lot in case of transport by a vehicle.....	10
6.3.4 Definition of a lot in case of transport by ship.....	10
6.3.5 Definition of a lot in case of sampling from a static lot.....	10
6.4 Determination of the sampling procedure.....	10
6.5 Determination of the number of increments.....	11
6.6 Determination of minimum sample mass.....	11
6.7 Determination of the minimum increment mass.....	11
6.7.1 Determination of minimum increment mass for material flows.....	11
6.7.2 Determination of the minimum increment mass for static lots, vehicles or ships.....	11
6.8 Determination of the planned increment and planned sample amounts.....	11
6.9 Selection of distribution of increments over a lot.....	12
6.9.1 General.....	12
6.9.2 Determination of the distribution of the increments when sampling from a material flow.....	12
6.9.3 Determination of the distribution of the increments when sampling from a vehicle(s).....	12
6.9.4 Implementation of sampling from a static lot.....	13
6.10 Sampling equipment and implements.....	14
7 Implementation of the sampling plan	14
7.1 Steps before actual sampling.....	14
7.2 Steps during sampling.....	14
7.3 Steps after sampling.....	14
8 Handling and storage of samples	15
9 Precision	15
Annex A (normative) Procedure for the development of a sampling plan	16
Annex B (normative) Sampling plan	19
Annex C (informative) Example of a sampling plan	23
Annex D (normative) Sampling equipment and implements	28
Annex E (normative) Determination of minimum sample mass	33
Annex F (normative) Determination of increment mass for sampling from material flows	38
Annex G (normative) Determination of increment mass for sampling from static lots, vehicles or ships	41
Annex H (normative) Implementation of sampling plan from a material flow	42

Annex I (normative) Implementation of the sampling plan from a static lot or vehicle	46
Annex J (normative) Minimum sample mass required for analysis	48
Annex K (informative) Additional information about precision	51
Annex L (informative) Examples for stratified and stratified random sampling	54
Bibliography	56

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 300, *Solid recovered fuels*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The testing of solid recovered fuels (SRF) enables informed decisions about their subsequent handling and use. In order to carry out a test on a solid recovered fuel, a sample of the material is required. Before any sampling operation is devised, it is important that the objectives for sampling are clearly identified and subsequently well executed to ensure that the expectations of any involved parties are recognized and satisfied. The identification of objectives helps to define the level of testing required, e.g. thorough examination or routine testing, and in addition desired reliability of testing / assessment and frequency of testing. The sampling objectives, along with the sequence of operations required to fulfil them, are detailed in an overall sampling plan. After a sampling plan has been prepared, the sampling of SRF itself can be implemented.

This document is largely based on the work already done by CEN/TC 292 “*Characterization of waste*” (now integrated in CEN/TC 444 “*Environmental characterization of solid matrices*”), in particular EN 14899:2005^[1] and CEN/TR 15310-1:2006^[2].

The main characteristic that makes SRF samples significantly different from other kinds of waste is that SRFs are very often solid, but neither “granular” nor monolithic; it often happens that SRF samples are fibrous-like materials. This typical characteristic of SRF implies that the statistical formula for sampling of EN 14899:2005 and CEN/TR 15310-1:2006, Annex D are not applicable without amendment. The “shape factor” (f) is additionally needed in the statistical formula.

[Figure 1](#) shows the links between the essential elements of a testing program.

Sampling procedures are provided for a range of process streams and common storage conditions. The sampling technique adopted depends on a combination of different characteristics of the material and circumstances encountered at the sampling location. The determining factors are:

- the type of solid recovered fuel;
- the situation at the sampling location / the way in which the material occurs (e.g. in a stockpile, on a conveyor belt, in a lorry);
- the (expected) degree of heterogeneity (e.g. monostreams, mixed fuels, blended fuels).

This document is primarily geared toward laboratories, producers, suppliers and purchasers of solid recovered fuels, but is also useful for the authorities and inspection organizations.

Sampling of solid biofuels is described in ISO 18135^[3].

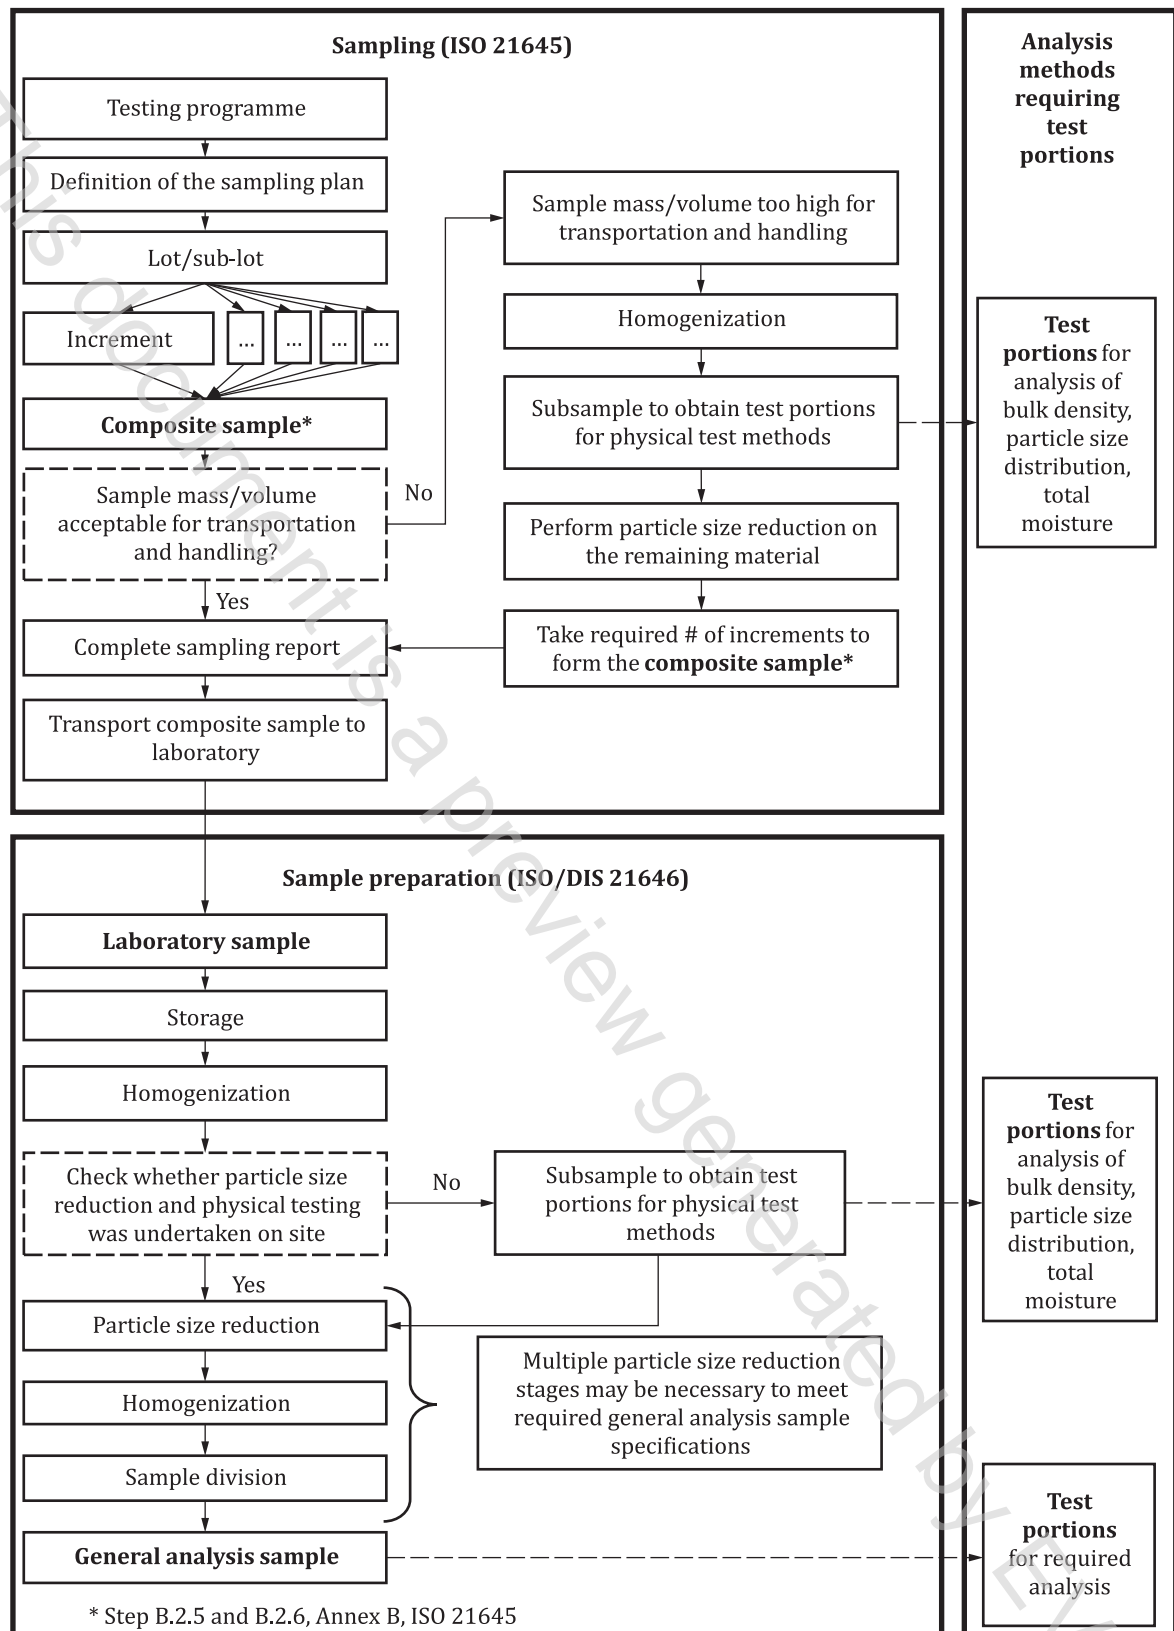


Figure 1 — Links between the essential elements of a testing program

Solid recovered fuels — Methods for sampling

1 Scope

This document specifies methods for taking samples of solid recovered fuels for example from production plants, from deliveries or from stock. It includes manual and mechanical methods.

It is not applicable to solid recovered fuels that are formed by liquid or sludge, but it includes dewatered sludge.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21637, *Solid recovered fuels — Terminology, definitions and descriptions*

ISO 21640:—¹⁾, *Solid recovered fuels — Specifications and classes*

ISO 21644, *Solid recovered fuels — Methods for the determination of biomass content*

ISO 21654, *Solid recovered fuels — Determination of calorific value*

ISO 21656, *Solid recovered fuels — Determination of ash content*

ISO 21660-3, *Solid recovered fuels — Determination of moisture content using the oven dry method — Part 3: Moisture in general analysis sample*

ISO 21663, *Solid recovered fuels — Methods for the determination of carbon (C), hydrogen (H) and nitrogen (N) content*

ISO 22167, *Solid recovered fuels — Determination of the content of volatile matter*

EN 15408, *Solid recovered fuels — Method for the determination of sulphur (S), chlorine (Cl), fluorine (F) and bromine (Br) content*

EN 15410, *Solid recovered fuels — Method for the determination of the content of major elements (Al, Ca, Fe, K, Mg, Na, P, Si, Ti)*

EN 15411, *Solid recovered fuels — Methods for the determination of the content of trace elements (As, Ba, Be, Cd, Co, Cr, Cu, Hg, Mo, Mn, Ni, Pb, Sb, Se, Tl, V and Zn)*

EN 15415-1, *Solid recovered fuels — Determination of particle size distribution — Part 1: Screen method for small dimension particles*

EN 15415-2, *Solid recovered fuels — Determination of particle size distribution — Part 2: Maximum projected length method (manual) for large dimension particles*

EN 15415-3, *Solid recovered fuels — Determination of particle size distribution — Part 3: Method by image analysis for large dimension particles*

CEN/TS 15401, *Solid recovered fuels — Determination of bulk density*

CEN/TR 15404, *Solid recovered fuels — Methods for the determination of ash melting behaviour by using characteristic temperatures*

1) Under preparation. Stage at the time of publication ISO/FDIS 21640.

CEN/TS 15405, *Solid recovered fuels — Determination of density of pellets and briquettes*

CEN/TS 15406, *Solid recovered fuels — Determination of bridging properties of bulk material*

CEN/TS 15412, *Solid recovered fuels — Methods for the determination of metallic aluminum*

CEN/TS 15414-1, *Solid recovered fuels — Determination of moisture content using the oven dry method — Part 1: Determination of total moisture by a reference method*

CEN/TS 15414-2, *Solid recovered fuels — Determination of moisture content using the oven dry method — Part 2: Determination of total moisture by a simplified method*

CEN/TS 15639, *Solid recovered fuels — Determination of mechanical durability of pellets*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21637 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1
coefficient of variation
estimate of the standard deviation of a population from a *sample* (3.28) of *n* results divided by the mean of that sample

Note 1 to entry: The coefficient of variation is frequently stated as a percentage.

Note 2 to entry: Adapted from Eurachem/Citac Guide CG 4^[4].

3.2
composite sample mass
amount of *sample* (3.28) taken from a *lot* (3.11) or a *sub-lot* (3.40) consisting of all the *increments* (3.9)

3.3
distribution factor
correction factor for the *particle size distribution* (3.20) of the material to be sampled

[SOURCE: ISO 21637:2020, 3.17]

3.4
drop flow
material flow falling over an overflow point or a drop point in a transport system

[SOURCE: ISO 21637:2020, 3.18]

3.5
duplicate sample
two *samples* (3.28) taken under comparable conditions

Note 1 to entry: This selection may be accomplished by taking units adjacent in time or space.

Note 2 to entry: The replicate sample is usually used to estimate sample variability.

[SOURCE: ISO 21637:2020, 3.23, modified – Note 2 to entry has been added.]

3.6
general analysis sample
sub-sample (3.41) of a *laboratory sample* (3.10) having a nominal top size of 1 mm or less and used for a number of chemical and physical analyses