

TECHNICAL REPORT



Insulating liquids – Quantitative determination of methanol and ethanol in insulating liquids



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Preview generated by EVS

TECHNICAL REPORT



Insulating liquids – Quantitative determination of methanol and ethanol in insulating liquids

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.040.10

ISBN 978-2-8322-9990-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

| | |
|--|----|
| FOREWORD..... | 4 |
| INTRODUCTION..... | 6 |
| 1 Scope..... | 8 |
| 2 Normative references | 8 |
| 3 Terms and definitions | 8 |
| 4 Symbols and abbreviated terms..... | 9 |
| 5 Sampling..... | 10 |
| 6 Principle of the methods | 10 |
| 7 Method A – HS-GC-MS..... | 10 |
| 7.1 General..... | 10 |
| 7.2 Apparatus | 10 |
| 7.2.1 Analytical balance | 10 |
| 7.2.2 Headspace sampler..... | 10 |
| 7.2.3 Gas chromatograph coupled with mass spectrometry detector..... | 11 |
| 7.3 Reagents and materials | 11 |
| 7.3.1 Laboratory equipment and glassware..... | 11 |
| 7.3.2 Standard chemicals | 11 |
| 7.3.3 GC carrier gases | 12 |
| 7.4 Preparation of standard solutions..... | 12 |
| 7.4.1 General | 12 |
| 7.4.2 Degassed insulating liquid | 12 |
| 7.4.3 Internal standard stock solution | 12 |
| 7.4.4 Standard solutions of methanol and ethanol | 13 |
| 7.5 Sample preparation..... | 14 |
| 7.6 Headspace sampler parameters..... | 15 |
| 7.7 Gas chromatograph parameters..... | 15 |
| 7.7.1 Injector | 15 |
| 7.7.2 Carrier gas | 15 |
| 7.7.3 Temperature ramp | 15 |
| 7.8 Mass spectrometer parameters | 16 |
| 7.9 Analysis procedure | 16 |
| 7.10 Internal standard calibration..... | 17 |
| 7.10.1 General | 17 |
| 7.10.2 Response factor determination | 18 |
| 7.11 Expression of the results..... | 18 |
| 8 Method B – HS-GC-FID | 18 |
| 8.1 General..... | 18 |
| 8.2 Apparatus | 18 |
| 8.2.1 Analytical balance | 18 |
| 8.2.2 Headspace sampler..... | 18 |
| 8.2.3 Gas chromatograph with flame ionization detector..... | 19 |
| 8.3 Reagents and materials | 19 |
| 8.3.1 Laboratory equipment and glassware..... | 19 |
| 8.3.2 Standard chemicals | 19 |
| 8.3.3 GC carrier gases | 19 |
| 8.4 Preparation of standard solutions..... | 20 |

| | | |
|-------|---|----|
| 8.4.1 | General | 20 |
| 8.4.2 | Degassed insulating liquid | 20 |
| 8.4.3 | Standard solutions of methanol and ethanol | 20 |
| 8.5 | Sample preparation..... | 21 |
| 8.6 | Headspace sampler parameters..... | 21 |
| 8.7 | Gas chromatograph parameters | 22 |
| 8.7.1 | Injector | 22 |
| 8.7.2 | Carrier gas | 22 |
| 8.7.3 | Temperature ramp | 22 |
| 8.7.4 | FID parameters..... | 22 |
| 8.8 | Analysis procedure | 22 |
| 8.9 | Calibration | 23 |
| 8.10 | Expression of the results..... | 23 |
| 9 | Test report..... | 23 |
| 10 | Precision | 24 |
| 10.1 | Verification of the entire analytical system | 24 |
| 10.2 | General..... | 24 |
| 10.3 | Detection limits of Method A and Method B | 24 |
| 10.4 | Repeatability | 24 |
| 10.5 | Reproducibility | 25 |
| | Bibliography..... | 26 |
| | Figure 1 – Comparison of methanol and 2-furfural production in mineral oil versus cellulose scission number | 7 |
| | Figure 2 –Typical chromatogram with selected ion ($m/z = 31$) mass spectrum | 17 |
| | Figure 3 – Typical GC-FID chromatogram | 23 |
| | Table 1 –Method A – Example of GC temperature ramp parameters | 16 |
| | Table 2 – Method A – m/z values of internal standard ions | 16 |
| | Table 3 – Method B – Examples of FID parameters reported in literature | 22 |
| | Table 4 – Detection limits of Method A and Method B, in mineral oil | 24 |
| | Table 5 – Repeatability (r) in % for Method A (HS-GC-MS), in mineral oil | 24 |
| | Table 6 – Reproducibility (R) in % for Method A (HS-GC-MS), in mineral oil..... | 25 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INSULATING LIQUIDS – QUANTITATIVE DETERMINATION OF
METHANOL AND ETHANOL IN INSULATING LIQUIDS****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TR 63025 has been prepared by IEC technical committee 10: Fluids for electrotechnical applications. It is a Technical Report.

The text of this Technical Report is based on the following documents:

| Draft | Report on voting |
|-------------|------------------|
| 10/1112/DTR | 10/1131/RVDTR |

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Report is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

It has been demonstrated over several years that the ageing of impregnated paper in insulating liquid, which results in cellulose degradation, produces molecules of light alcohols, methanol (MeOH) and ethanol (EtOH). In laboratory experiments, a good correlation has been established between the increase of the methanol content in insulating liquid and the decrease of the degree of polymerization of the cellulose, irrespective of the type of paper, standard kraft or thermally upgraded. Further, at the early stages of paper ageing, i.e. of cellulose degradation, the methanol content is always higher than that of furanic compounds (mainly 2-furfural), so this behaviour suggests that methanol could be a relevant in-oil marker to detect early paper ageing in transformers and to assess its evolution (see Figure 1).

Ethanol is a second light alcohol of interest that these methods would be able to detect.

It should be emphasized that in a real transformer the situation is much more complicated than in laboratory setups, so the relationship between in situ paper degradation and tracer concentration (MeOH, EtOH, as well as 2-FAL) is much more complex and hard to establish.

In order to address the growing interest of industry in using these alcohols as tracers of cellulosic material ageing in operating equipment, there is a need for the development of a document describing analytical methods to quantify methanol and ethanol in the different types of insulating liquids. The objective is for one of these methods to remain as simple and affordable as possible, and for the other to be more sophisticated and more accurate.

The principle of this Technical Report was brought up and discussed during the IEC TC 10 plenary meeting held in Vienna in November 2013. A project team was set up to prepare test methods for the unambiguous quantitative determination of methanol and ethanol in unused and used insulating liquids.

WARNING – Health and safety


This document does not purport to address all the safety problems associated with its use. It is the responsibility of the user of this document to establish appropriate health and safety practices and determine the applicability of regulatory limitations prior to use.

The insulating liquids which are the subject of this document should be handled with due regard to personal hygiene. Direct contact with eyes may cause slight irritation. In the case of eye contact, irrigation with copious quantities of clean running water should be carried out and medical advice sought.


Some of the tests specified in this document involve the use of processes that could lead to a hazardous situation. Attention is drawn to the relevant standard for guidance.

WARNING – Environment

This document involves mineral oils, ester liquids, chemicals and used sample containers. The disposal of these items should be carried out in accordance with current national legislation with regard to their impacts on the environment. Every precaution should be taken to prevent the release into the environment of the chemicals used during the test.

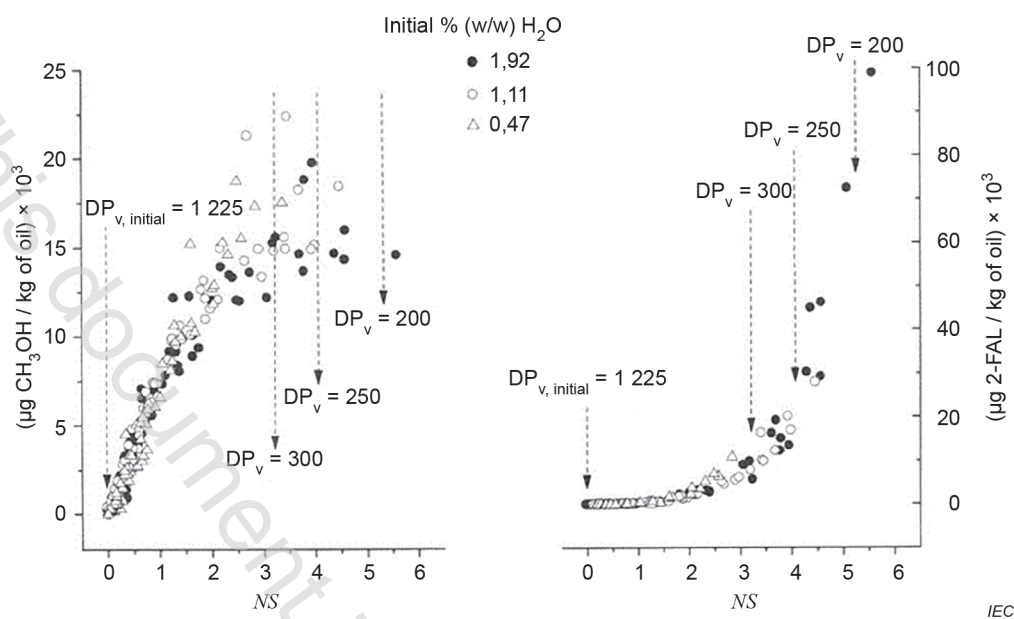

a) Clupak HD75 specimens

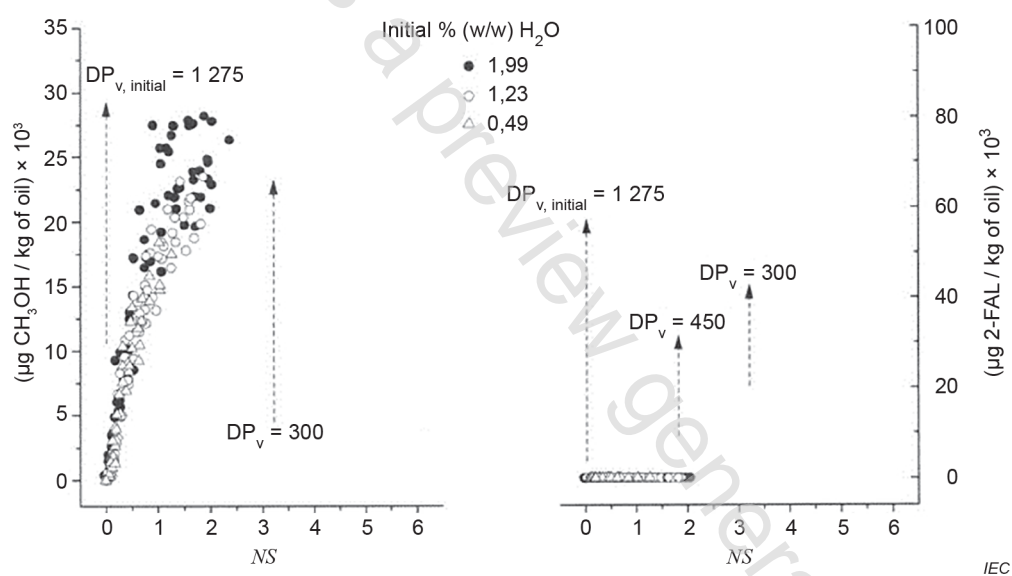

b) Manning 220 mannitherm D specimens

Key

NS: number of scissions, inversely proportional to the polymerization degree (DP_v)

a): standard kraft paper

b): thermally upgraded paper

NOTE See Jalbert J., Gilbert R., Tétreault P., Morin B. and Lessard-Déziel D. (2007) in the Bibliography.

Figure 1 – Comparison of methanol and 2-furfural production in mineral oil versus cellulose scission number

INSULATING LIQUIDS – QUANTITATIVE DETERMINATION OF METHANOL AND ETHANOL IN INSULATING LIQUIDS

1 Scope

This document specifies two test methods for methanol and ethanol determination in insulating liquids.

Methanol (MeOH) and ethanol (EtOH) are two light alcohols generated during the degradation process of cellulosic materials. They are soluble in insulating liquids so they can be regarded as ageing tracers whose concentrations in oil reflect the degradation of insulating cellulosic materials in liquid-impregnated transformers.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

flame ionization detector

device in which hydrocarbons are burned in a hydrogen-air flame and the electrical current caused by the resulting ions is measured between two electrodes

Note 1 to entry: The flame ionization detector is used in gas chromatography mainly to detect hydrocarbon compounds.

[SOURCE: ISO 14532:2014, 2.4.8, modified – "detector" replaced with "device".]

3.2

gas chromatograph

GC

device used to determine complex mixture components that can be vaporized without decomposition then separated by differential migration with a carrier gas through a stationary phase in a column

Note 1 to entry: The method used is called "gas chromatography" (GC).

[SOURCE: IEC 62697-1:2012, 3.1.14, modified – "used for separating volatile and semi-volatile compounds in mixtures" replaced with "used to determine complex mixture components", "through differential migration" replaced with "then separated by differential migration" and "a stationary phase" and Note 1 to entry added.]

3.3

headspace extraction

procedure for collecting the volatile compounds emitted by a specimen enclosed in an airtight vial under controlled conditions