INTERNATIONAL STANDARD

ISO 21111-6

First edition 2021-11

Road vehicles — In-vehicle Ethernet —

Part 6:

Electrical 100-Mbit/s physical entity requirements and conformance test plan

Véhicules routiers — Ethernet embarqué —

Partie 6: Exigences et plan de tests de conformité de l'entité physique à 100-Mbit/s électrique





© ISO 2021

mentation, no part c'al including phe'vid from either All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

Co	ntent	S	Page					
Fore	word		vi					
Intr	oductio	on	vii					
1	Scop	ıe	1					
2	~ O	native references						
3		ns and definitions						
4	Sym : 4.1	bols and abbreviated terms Symbols						
	4.2	Abbreviated terms						
5	Conv	ventions	4					
6	Wake-up and sleep features							
	6.1	Extension of physical coding sub-layer						
	6.2	Service primitives and interfaces	6					
	6.3	Power sequencing states						
	6.4	Command definitions						
		6.4.1 General						
		6.4.3 Wake-up request (WUR)						
		6.4.4 Wake-up pulse (WUP)						
	6.5	Generation of scrambling bits sdn[2:0]						
	6.6	PCS PHY control state diagram						
7		test system and CTC structure						
	7.1 General 7.2 Test system set-up – Transmit test system							
	7.2	Test system set-up – Transmit test system						
	7.4	CTC structure						
8	PHY	- Control IUT conformance test plan (with MII access)	16					
	8.1	PHY – Group 1: PHY control and timers (with MII access)	16					
		8.1.1 Overview						
		8.1.2 CTC_4.1.1 - PMA reset (with MII access)	16					
		8.1.3 CTC_4.1.2 - Value of minwait_timer - minwait_timer in TRAINING state (with MII access)	17					
		8.1.4 CTC_4.1.3 - Value of maxwait_timer (with MII access)						
		8.1.5 CTC_4.1.4 - Value of stabilize timer (with MII access)	22					
	8.2	PHY – Group 2: PHY control state diagram (with MII access)	23					
		8.2.1 Overview 8.2.2 CTC_4.2.1 – PHY control state diagram - disable transmitter state (with	23					
		MII access)	23					
		8.2.3 CTC_4.2.2 - PHY control state diagram - SLAVE SILENT state (with MII	20					
		access)						
		8.2.4 CTC_4.2.3 - PHY control state diagram - TRAINING state (with MII access)						
		8.2.5 CTC_4.2.4 - PHY control state diagram - SEND IDLE state (with MII access)	28					
		MII access)	31					
	8.3	PHY – Group 3: PHY link monitor state diagram (with MII access)						
		8.3.1 Overview	35					
		8.3.2 CTC_4.3.1 – Link monitor state diagram – IUT does not enter the LINK OK	2.0					
		state (with MII access)						
9	PCS - IUT conformance test plan (with MII access)							
	9.1	PCS – Group 1: PCS transmit (with MII access)						
		9.1.2 CTC 3.1.1 – PCS signalling (with MII access)	30 39					

ISO 21111-6:2021(E)

	9.1.3	CTC_3.1.2 - PCS reset (with MII access)	41
	9.1.4	CTC_3.1.3 - PCS transmit proper ssp (with MII access)	41
	9.1.5	CTC_3.1.4 - PCS transmit proper ESD (with MII access)	42
	9.1.6	CTC_3.1.5 - PCS transmit ESD with tx_error (with MII access)	
	9.1.7	CTC_3.1.6 - PCS transmission of stuff bits (with MII access)	
	9.1.8	CTC_3.1.7 - PCS tx error (with MII access)	
9.2		Group 2: PCS transmit state diagram (with MII access)	
·	9.2.1	Overview	
	9.2.2	CTC_3.2.1 – PCS transmit state diagram - send idle state (with MII access)	
	9.2.3	CTC_3.2.2 - PCS transmit state diagram - ssp1 vector and ssp2 vector	10
	7.2.3	states (with MII access)	4.7
	9.2.4	CTC_3.2.3 - PCS transmit state diagram - ssd3 vector state (with MII	17
	7.4.4	access)	17
	025		47
	9.2.5	CTC_3.2.4 - PCS transmit state diagram - TRANSMIT DATA state (with MII	40
	0.2.6	access)	49
	9.2.6	CTC_3.2.5 - PCS transmit state diagram - ESD1 VECTOR state (with MII	- 0
	0.0.7	access)	50
	9.2.7	CTC_3.2.6 - PCS transmit state diagram - ESD2 VECTOR state (with MII	
		access)	50
	9.2.8	CTC_3.2.7 - PCS transmit state diagram - ESD3 VECTOR state (with MII	
		access)	51
	9.2.9	CTC_3.2.8 – PCS transmit state diagram - ERR ESD1 VECTOR state (with MII	
		access)	52
	9.2.10	CTC_3.2.9 – PCS transmit state diagram - ERR ESD2 VECTOR state (with MII	
		access)	53
	9.2.11	CTC_3.2.10 - PCS transmit state diagram - ERR ESD3 VECTOR state (with	
		MII access)	54
9.3	PCS -	Group 3: PCS receive (with MII access)	
	9.3.1	Overview	54
	9.3.2	CTC_3.3.1 - PCS receive signalling (with MII access)	54
	9.3.3	CTC_3.3.2 - PCS automatic polarity detection (with MII access)	
	9.3.4	CTC_3.3.3 - PCS receive ssp (with MII access)	
	9.3.5	CTC_3.3.4 - PCS receive ESD (with MII access)	
	9.3.6	CTC_3.3.5 - PCS receive ERR ESD3 (with MII access)	
	9.3.7	CTC_3.3.6 - PCS reception of stuff bits (with MII access)	
	9.3.8	CTC_3.3.7 - PCS de-interleave ternary pairs (with MII access)	
9.4		Group 4: PCS receive state diagram (with MII access)	
7.1	9.4.1	Overview	
	9.4.2	CTC_3.4.1 - PCS receive state diagram (with MII access) - IDLE state	
	9.4.3	CTC_3.4.2 - PCS receive state diagram (with MII access) - CHECK SSD2 state	
	9.4.4	CTC_3.4.3 – PCS receive state diagram (with MII access) - CHECK SSD3 state	
	9.4.5	CTC_3.4.4 – PCS receive state diagram (with MII access) - SSD state	
	9.4.6	CTC_3.4.5 - PCS receive state diagram (with MII access) - BAD SSD state	
	9.4.7	CTC_3.4.6 – PCS receive state diagram (with MII access) - FIRST SSD state	
	9.4.8	CTC_3.4.7 – PCS receive state diagram (with MII access) - FROT 33D state	
	9.4.6	CTC_3.4.7 - PCS receive state diagram (with MII access) - SECOND SSD state	
		CTC_3.4.9 – PCS receive state diagram (with MII access) - DATA state	65
	9.4.11	CTC_3.4.10 – PCS receive state diagram (with MII access) - CHECK ESD2	
	0.4.12	state	66
	9.4.12	CTC_3.4.11 – PCS receive state diagram (with MII access) - CHECK ESD3	
	0.4.40	state	
		CTC_3.4.12 - PCS receive state diagram (with MII access) - BAD ESD2 state	68
	9.4.14	CTC_3.4.13 – PCS receive state diagram (with MII access) - BAD END and	
		RX ERROR states	
9.5		Group 5: PCS JAB state diagram (with MII access)	
	9.5.1	Overview	
	9.5.2	CTC_3.5.1 - PCS JAB state diagram (with MII access) - rcv_max_timer	70
PMA -	- IUT re	equirements and conformance test plan (with MII access)	71

10

	10.1									
									I access)	
		10.1.3	CTC_5.1.2	- PMA tr	ansmitter d	istortion (v	vith MII ac	ccess)		72
) (with MII	73
		10.1.5								74
	O_{λ}									
									I access)	
	10.2	PMA -	Group 2: F	MA recei	ve tests (wit	th MII acces	ss)		-	83
									3)	
									ss)	
Biblio	graphy	7		0,						123
				0						
					6					
						.0				
							Q_{λ}			
								0,		
									\'\	

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 21111 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The ISO 21111 series includes in-vehicle Ethernet requirements and test plans that are disseminated in other International Standards and complements them with additional test methods and requirements. The resulting requirement and test plans are structured in different documents following the Open Systems Interconnection (OSI) reference model and grouping the documents that depend on the physical media and bit rate used.

In general, the Ethernet requirements are specified in ISO/IEC/IEEE 8802-3. The ISO 21111 series provides supplemental specifications (e.g. wake-up, I/O functionality), which are required for in-vehicle Ethernet applications. In road vehicles, Ethernet networks are used for different purposes requiring different bit-rates. Currently, the ISO 21111 series specifies the 1-Gbit/s optical and 100-Mbit/s electrical physical layer.

The ISO 21111 series contains requirement specifications and test methods related to the in-vehicle Ethernet. This includes requirement specifications for physical layer entity (e.g. connectors, physical layer implementations) providers, device (e.g. electronic control units, gateway units) suppliers, and system (e.g. network systems) designers. Additionally, there are test methods specified for conformance testing and for interoperability testing.

Safety (electrical safety, protection, fire, etc.) and electromagnetic compatibility (EMC) requirements are out of the scope of the ISO 21111 series.

The structure of the specifications given in the ISO 21111 series complies with the Open Systems Interconnection (OSI) reference model is specified in ISO/IEC 7498-1[1] and ISO/IEC 10731[3].

ISO 21111-1 defines the terms which are used in this series of standards and provides an overview of the standards for in-vehicle Ethernet including the complementary relations to ISO/IEC/IEEE 8802-3 and the amendments, the document structure, type of physical entities, in-vehicle Ethernet specific functionalities, and so on.

ISO 21111-2 specifies the interface between reconciliation sublayer and physical entity including reduced gigabit media independent interface (RGMII), and the common physical entity wake-up and synchronised link sleep functionalities, independent from physical media and bit rate.

ISO 21111-3 specifies supplemental requirements to a physical layer capable of transmitting 1-Gbit/s over plastic optical fibre compliant with ISO/IEC/IEEE 8802-3, with specific application to communications inside road vehicles, and a test plan for physical entity conformance testing.

ISO 21111-4[3] specifies the optical components requirements and test methods for 1-Gbit/s optical invehicle Ethernet.

ISO 21111-5 specifies, for 1-Gbit/s optical in-vehicle Ethernet, requirements on the physical layer at system level, requirements on the interoperability test set-ups, the interoperability test plan that checks the requirements for the physical layer at system level, requirements on the device-level physical layer conformance test set-ups, and device-level physical layer conformance test plan that checks a set of requirements for the OSI physical layer that are relevant for device vendors.

This document specifies advanced features of an ISO/IEC/IEEE 8802-3 in-vehicle Ethernet physical layer (often also called transceiver), e.g. for diagnostic purposes for in-vehicle Ethernet physical layers. It specifies advanced physical layer features, wake-up and sleep features, physical layer test suite, physical layer control requirements and conformance test plan, physical sublayers test suite, and physical sublayers requirements and conformance test plan.

ISO 21111-7 specifies the implementation for ISO/IEC/IEEE 8802-3, which defines the interface implementation for automotive applications together with requirements on components used to realize this Bus Interface Network (BIN). ISO 21111-7 also defines further testing and system requirements for systems implemented according to the system specification. In addition, ISO 21111-7 defines the channels for tests of transceivers with a test wiring harness that simulates various electrical communication channels.

ISO 21111-6:2021(E)

ISO 21111-8 specifies the transmission media, the channel performance, and the tests for an ISO/IEC/IEEE 8802-3 in-vehicle Ethernet.

ISO 21111-9 specifies the data link layer requirements and conformance test plan. It specifies the requirements and test plan for devices and systems with bridge functionality.

ISO 21111-10 specifies the application to session layer requirements and conformance test plan. It specifies the requirements and conformance test plan for devices and systems that include functionality related with OSI layers from 7 to 5.

ISO 21111-11 specifies the transport to network layer requirements and conformance test plan. It specifies the requirements and conformance test plan for devices and systems that include functionality related with OSI layers from 4 and 3.

Figure 1 shows the parts of the ISO 21111 series and the document structure.

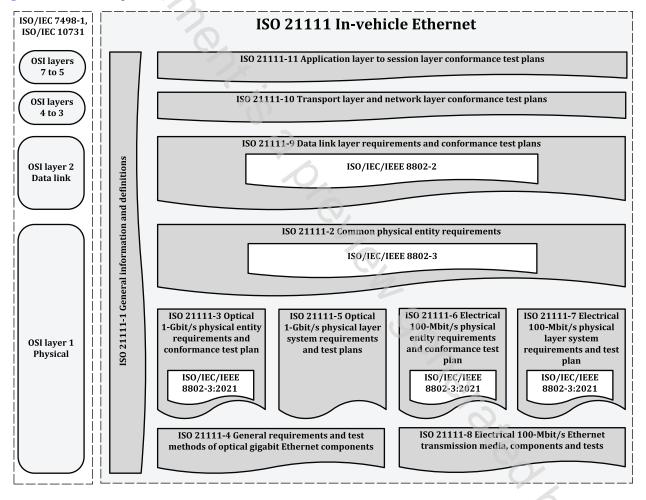


Figure 1 — In-vehicle Ethernet document reference according to OSI model

Road vehicles — In-vehicle Ethernet —

Part 6:

Electrical 100-Mbit/s physical entity requirements and conformance test plan

1 Scope

This document specifies advanced features of an ISO/IEC/IEEE 8802-3 automotive Ethernet PHY (often also called transceiver), e.g. for diagnostic purposes for automotive Ethernet PHYs.

This document specifies:

- advanced PHY features;
- wake-up and sleep features;
- PHY test suite;
- PHY control IUT requirements and conformance test plan;
- PCS test suite;
- PCS IUT requirements and conformance test plan;
- PMA test suite; and
- PMA IUT requirements and conformance test plan.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 9646-1, Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 1: General concepts

ISO 21111-1, Road vehicles — In-vehicle Ethernet — Part 1: General information and definitions

ISO 21111-2, Road vehicles — In-vehicle Ethernet — Part 2: Common physical entity requirements

ISO/IEC/IEEE 8802-3:2021, Telecommunications and exchange between information technology systems — Requirements for local and metropolitan area networks — Part 3: Standard for Ethernet

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21111-1, ISO/IEC 9646-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at https://www.electropedia.org/