
**Fire safety engineering —
Requirements governing algebraic
formulae —**

**Part 2:
Fire plume**

*Ingénierie de la sécurité incendie — Exigences régissant les formules
algébriques —*

Partie 2: Panaches de feu



This document is a preview generated by EUS



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Requirements governing the description of physical phenomena.....	2
5 Requirements governing the calculation process.....	3
6 Requirements governing limitations.....	3
7 Requirements governing input parameters.....	3
8 Requirements governing the domain of applicability.....	3
9 Example of documentation.....	3
Annex A (informative) Formulae for quasi-steady, axisymmetric fire plumes from a circular or near-circular fire source.....	4
Annex B (informative) Input data on fire sources for calculations of fire plume properties.....	15
Bibliography.....	19

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 92, *Fire safety*, Subcommittee SC 4, *Fire safety engineering*.

This first edition cancels and replaces ISO 16734:2006, which has been technically revised.

The main changes are as follows:

- the main body has been simplified by making reference to ISO 24678-1;
- comparisons with experimental data have been added in [Annex A](#);
- [Annex B](#) has been added to describe input data on the fire source.

A list of all parts in the ISO 24678 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The ISO 24678 series is intended to be used by fire safety practitioners involved with fire safety engineering calculation methods. It is expected that the users of this document are appropriately qualified and competent in the field of fire safety engineering. It is particularly important that users understand the parameters within which particular methodologies may be used.

Algebraic formulae conforming to the requirements of this document are used with other engineering calculation methods during a fire safety design. Such a design is preceded by the establishment of a context, including the fire safety goals and objectives to be met, as well as performance criteria when a trial fire safety design is subject to specified design fire scenarios. Engineering calculation methods are used to determine if these performance criteria are met by a particular design and if not, how the design needs to be modified.


The subjects of engineering calculations include the fire-safe design of entirely new built environments, such as buildings, ships or vehicles, as well as the assessment of the fire safety of existing built environments.

The algebraic formulae discussed in this document can be useful for estimating the consequences of design fire scenarios. Such formulae are valuable for allowing the practitioner to quickly determine how a proposed fire safety design needs to be modified to meet performance criteria and to compare among multiple trial designs. Detailed numerical calculations can be carried out up until the final design documentation. Examples of areas where algebraic formulae have been applicable include determination of convective and radiative heat transfer from fire plumes, prediction of ceiling jet flow properties governing detector response times, calculation of smoke transport through vent openings, and analysis of compartment fire hazards such as smoke filling and flashover. However, the simple models often have stringent limitations and are less likely to include the effects of multiple phenomena occurring in the design scenarios.

The general principles of fire safety engineering are described in ISO 23932-1, which provides a performance-based methodology for engineers to assess the level of fire safety for new or existing built environments. Fire safety is evaluated through an engineered approach based on the quantification of the behaviour of fire and based on knowledge of the consequences of such behaviour on life safety, property and the environment. ISO 23932-1 provides the process (i.e. necessary steps) and essential elements for conducting a robust performance-based fire safety design.

ISO 23932-1 is supported by a set of fire safety engineering documents on the methods and data needed for all the steps in a fire safety engineering design as summarized in [Figure 1](#) (taken from ISO 23932-1:2018, Clause 4). This set of documents is referred to as the Global fire safety engineering analysis and information system. This global approach and system of standards provides an awareness of the interrelationships between fire evaluations when using the set of fire safety engineering documents. The set of documents includes ISO/TS 13447, ISO 16730-1, ISO 16732-1, ISO 16733-1, ISO/TS 16733-2, ISO 16735, ISO 16736, ISO 16737, ISO/TR 16738, ISO 24678-1, ISO 24679-1, ISO/TS 29761 and other supporting Technical Reports that provide examples of and guidance on the application of these documents.

Each document supporting the global fire safety engineering analysis and information system includes language in the introduction to tie that document to the steps in the fire safety engineering design process outlined in ISO 23932-1. ISO 23932-1 requires that engineering methods be selected properly to predict the fire consequences of specific scenarios and scenario elements (ISO 23932:2018, Clause 12). Pursuant to the requirements of ISO 23932-1, this document provides the requirements governing algebraic formulae for fire safety engineering. This step in the fire safety engineering process is shown as a highlighted box in [Figure 1](#) and described in ISO 23932-1.

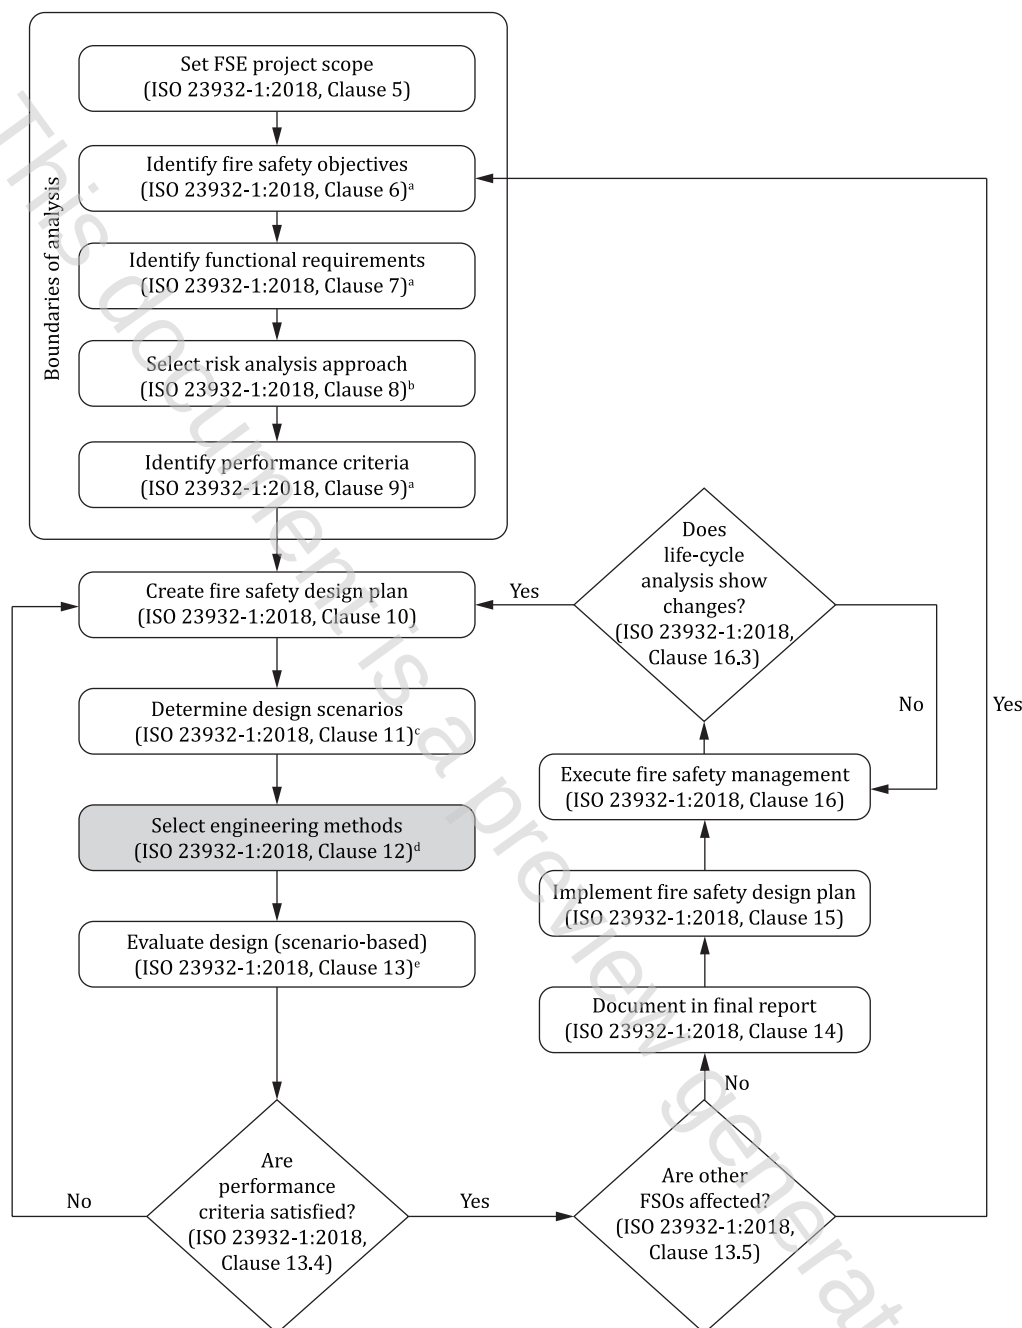

^a See also ISO/TR 16576 (Examples).

^b See also ISO 16732-1, ISO 16733-1, ISO/TS 16733-2, ISO/TS 29761.

^c See also ISO 16732-1, ISO 16733-1, ISO/TS 16733-2, ISO/TS 29761.

^d See also ISO/TS 13447, ISO 16730-1, ISO/TR 16730-2 to ISO/TR 16730-5 (Examples), ISO 16735, ISO 16736, ISO 16737, ISO/TR 16738, ISO 24678-1, ISO 24678-2 (this document), ISO 24678-6 and ISO 24678-7.

^e See also ISO/TR 16738, ISO 16733-1, ISO/TS 16733-2.

NOTE Documents linked to large parts of the fire safety engineering process: ISO 16732-1, ISO 16733-1, ISO 24679-1, ISO/TS 29761, ISO/TR 16732-2 to ISO/TR 16732-3 (Examples), ISO/TR 24679-2 to ISO/TR 24679-4 and ISO/TR 24679-6 (Examples).

Figure 1 — Flow chart illustrating the fire safety engineering design process (from ISO 23932-1:2018)

Fire safety engineering — Requirements governing algebraic formulae —

Part 2: Fire plume

1 Scope

This document specifies the requirements governing the application of a set of explicit algebraic formulae for the calculation of specific characteristics of fire plume.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13943, *Fire safety — Vocabulary*

ISO 24678-1, *Fire safety engineering — Requirements governing algebraic formulae — Part 1: General requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13943 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

axisymmetric

in a state in which mean motion and properties, such as mean temperature rise, are symmetric with respect to a vertical centreline

3.2

characteristic plume radius

radius at which the time-average plume temperature rise above the ambient value is one half the centreline value

3.3

convective fraction of heat release rate

ratio of the convective heat release rate to the total heat release rate

3.4

convective heat release rate

component of the heat release rate carried upward by the fire plume motion

Note 1 to entry: Above the mean flame height, this component is considered invariant with height.