

**Glass in building - Structural sealant glazing - Part 1:
Glass products for structural sealant glazing systems for
supported and unsupported monolithic and multiple
glazing**

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

| | |
|---|--|
| See Eesti standard EVS-EN 13022-1:2014 sisaldab Euroopa standardi EN 13022-1:2014 inglisekeelset teksti. | This Estonian standard EVS-EN 13022-1:2014 consists of the English text of the European standard EN 13022-1:2014. |
| Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas. | This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation. |
| Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 04.06.2014. | Date of Availability of the European standard is 04.06.2014. |
| Standard on kättesaadav Eesti Standardikeskusest. | The standard is available from the Estonian Centre for Standardisation. |

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile standardiosakond@evs.ee.

ICS 81.040.20

Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:
Aru 10, 10317 Tallinn, Eesti; www.evs.ee; telefon 605 5050; e-post info@evs.ee

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:
Aru 10, 10317 Tallinn, Estonia; www.evs.ee; phone 605 5050; e-mail info@evs.ee

English Version

Glass in building - Structural sealant glazing - Part 1: Glass products for structural sealant glazing systems for supported and unsupported monolithic and multiple glazing

Verre dans la construction - Système de vitrage extérieur collé (VEC) - Partie 1: Produits verriers pour système VEC pour produits monolithiques et produits multiples calés

Glas im Bauwesen - Geklebte Verglasungen - Teil 1: Glasprodukte für Structural-Sealant-Glazing (SSG-) Glaskonstruktionen für Einfachverglasungen und Mehrfachverglasungen mit oder ohne Abtragung des Eigengewichtes

This European Standard was approved by CEN on 9 February 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

| | |
|---|----|
| Foreword..... | 3 |
| 1 Scope | 4 |
| 2 Normative references | 7 |
| 3 Symbols, terminology, terms and definitions..... | 8 |
| 3.1 Symbols | 8 |
| 3.2 Terminology | 9 |
| 3.3 Terms and definitions | 10 |
| 4 Characteristics of glass products - requirements..... | 12 |
| 4.1 Appropriate glass products | 12 |
| 4.2 Dimensional tolerances | 12 |
| 4.3 Glass shapes – Curved glass | 12 |
| 4.4 Corners, notches and holes | 13 |
| 5 Verification of the suitability of glass products for use in SSG systems when exposed to UV radiation | 14 |
| 5.1 General..... | 14 |
| 5.2 Insulating glass unit (IGU) | 14 |
| 5.2.1 Situation 1 (see Figure 2 of the Scope) | 14 |
| 5.2.2 Situation 2 (see Figure 2 of the Scope) | 14 |
| 5.2.3 Coated glass..... | 15 |
| 5.2.4 Possibility to substitute the outer IGU seal – General case..... | 16 |
| 5.2.5 Possibility to substitute the outer IGU seal – Case of unsupported glass: Further requirements | 16 |
| 5.3 Monolithic glass or laminated glass, Situation 3 (see Figure 2)..... | 16 |
| 5.4 Assessment of the adhesion between the sealant and the glass | 16 |
| 5.4.1 Clear float | 16 |
| 5.4.2 Coated glass..... | 16 |
| 5.4.3 Enamelled glass..... | 16 |
| 5.4.4 Patterned glass | 17 |
| 6 Design | 17 |
| 6.1 Calculation of the thickness of the glass | 17 |
| 6.2 Calculation of the height of the outer sealant of the insulating glass unit for supported and unsupported glazing | 17 |
| 6.2.1 Supported insulating glass unit | 17 |
| 6.3 Calculation of the height of the outer sealant of the insulating glass unit for unsupported glazing..... | 21 |
| 6.3.1 Calculation of the height regarding the relevant combined load of the wind, snow and self weight..... | 21 |
| 6.3.2 Calculation of the height of the outer seal to bear the permanent shear loading | 22 |
| 7 Minimum glass thickness | 22 |
| 7.1 General case..... | 22 |
| 7.2 Case of glass with worked edges | 23 |
| Annex A (informative) Assembly recommendations | 25 |
| A.1 Setting blocks for monolithic glass, laminated glass and insulating glass units | 25 |
| A.2 Water drainage from the system | 28 |
| Bibliography | 29 |

Foreword

This document (EN 13022-1:2014) has been prepared by Technical Committee CEN/TC 129 “Glass in building”, the secretariat of which is held by NBN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2014 and conflicting national standards shall be withdrawn at the latest by December 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 13022-1:2006+A1:2010.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

EN 13022-1 is one of a series of interrelated standards dealing with:

- glass products for structural sealant glazing systems;
- installation of glass products in a structural manner on building façades;
- UV-resistant and structural sealant for use in structural sealant glazing.

The interrelated parts are:

- EN 13022-1: *Glass in building — Structural sealant glazing — Part 1: Glass products for structural sealant glazing systems for supported and unsupported monolithic and multiple glazing*
- EN 13022-2: *Glass in building — Structural sealant glazing — Part 2: Assembly rules*
- EN 15434: *Glass in building — Product standard for structural and/or ultra-violet resistant sealant (for use with structural sealant glazing and/or insulating glass units with exposed seals)*

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

1 Scope

This European Standard specifies requirements for the suitability for use of supported and unsupported glass products for use in “Structural Sealant Glazing” (SSG) applications. Four schematic drawings of SSG systems are shown in Figure 1 and three section drawings of an SSG type II system are shown in Figure 2 for illustration purposes. This European Standard on glass products is considered as a supplement to the requirements specified in the corresponding standards with regard to verifying the suitability for use in SSG systems.

Only soda lime silicate glasses are taken into consideration in this European Standard.


Plastic glazing is excluded from the scope of this European Standard.

Any glass products meeting the requirements of this European Standard are suitable for use in SSG systems as defined in ETAG 002¹⁾ “Structural sealant glazing system”.

All glass products are installed and bonded into the support under controlled environmental conditions as described in Clause 5 of EN 13022-2:2014.

When the outer seal of the insulating glass unit has a structural function and/or is exposed to UV radiation without any protection, only silicone based sealant are permitted in the construction of the unit.

1) ETAG: European Technical Approval Guideline.

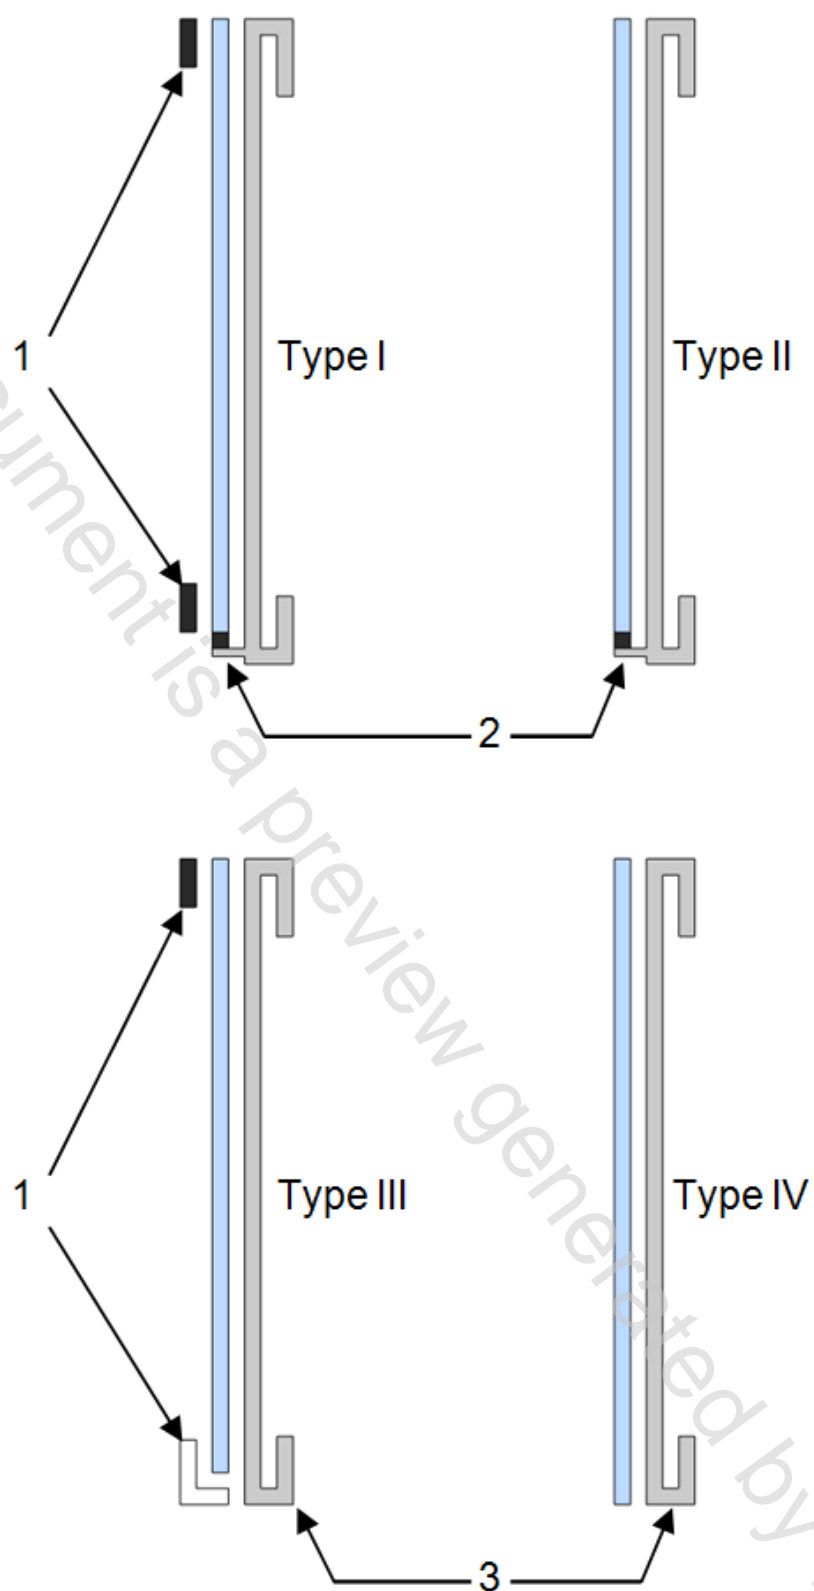
**Key**

- 1 retaining device to reduce danger in case of bond failure
- 2 mechanical self-weight support
- 3 structural sealant support frame

Figure 1 — Schematic examples of the different types of SSG

NOTE 1 Retaining devices may be required by national regulations.

NOTE 2 In case of laminated glass and laminated safety glass, SSGS of types III and IV may be forbidden by national regulation.

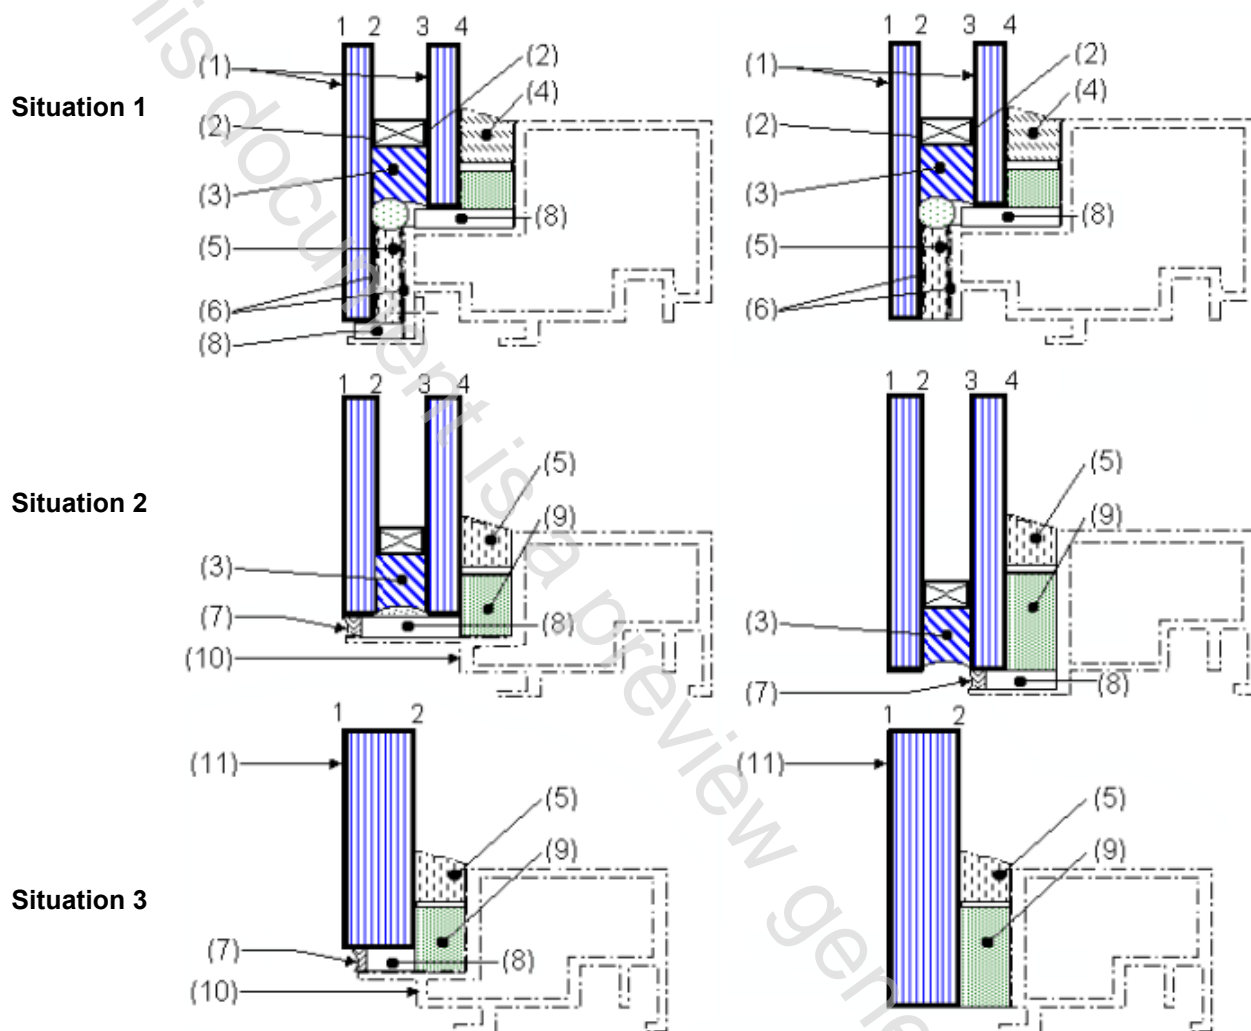

Key

- 1 glass unit
- 2 inner seal
- 3 outer seal
- 4 finishing material
- 5 structural seal
- 6 structural seal adhesion surface
- 7 weather seal
- 8 setting block
- 9 adhesive spacer
- 10 structural seal support frame
- 11 laminated glass or laminated safety glass or monolithic glass unit

Figure 2 — Scope

NOTE The section drawings above are examples of structural sealant glazing system type II and IV.

SITUATION 1

The SSG seal is applied on face 2 of the insulating glass unit. The outer IGU sealant has no structural function and therefore only contributes to the resistance of the unit against the ingress of water (vapour and liquid) and air. Depending on the type and construction of the IGU sealant any leakage of gas from the unit will be minimized. The SSG seal need to have adhesion to the glass and steel surfaces to withstand the mechanical stresses that results from the exposure of the IGU to the climatic elements and in particular the effects of solar radiation.

SITUATION 2

The SSG seal is applied on face 4 of the insulating glass unit. The outer IGU sealant has a structural function as well as having to maintain the integrity and performance of the IGU.

SITUATION 3

The SSG seal is applied on face 2 of the laminated glass or laminated safety glass or monolithic glass unit. The sealant has a structural function and any loads applied to the glass will be transferred to it.

NOTE In case of laminated glass and laminated safety glass, SSG of types III and IV may be forbidden by national regulation.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 572-2, *Glass in building — Basic soda lime silicate glass products — Part 2: Float glass*

EN 572-4, *Glass in building — Basic soda lime silicate glass products — Part 4: Drawn sheet glass*

EN 572-5, *Glass in building — Basic soda lime silicate glass products — Part 5: Patterned glass*

EN 1096 (all parts), *Glass in building — Coated glass*

EN 1279 (all parts), *Glass in building — Insulating glass units*

EN 1863 (all parts), *Glass in building — Heat strengthened soda lime silicate glass*

EN 1991-1-1, *Eurocode 1: Actions on structures — Part 1-1: General actions — Densities, self-weight, imposed loads for buildings*

EN 1991-1-3, *Eurocode 1 — Actions on structures — Part 1-3: General actions — Snow loads*

EN 1991-1-4, *Eurocode 1: Actions on structures — Part 1-4: General actions — Wind actions*

EN 12150 (all parts), *Glass in building — Thermally toughened soda lime silicate safety glass*

EN 14179 (all parts), *Glass in building — Heat soaked thermally toughened soda lime silicate safety glass*

EN 15434:2006+A1:2010, *Glass in building — Product standard for structural and/or ultra-violet resistant sealant (for use with structural sealant glazing and/or insulating glass units with exposed seals)*

prEN 16612, *Glass in building — Determination of the load resistance of glass panes by calculation and testing*

EN ISO 12543 (all parts), *Glass in building — Laminated glass and laminated safety glass*

3 Symbols, terminology, terms and definitions

3.1 Symbols

| | | |
|------------|--|----------------|
| a | minimum dimension of glass | m |
| b | maximum dimension of glass | m |
| c | is the height of sealant necessary for structural purposes | mm |
| d | width of insulating glass unit air space | mm |
| h | height of the outer seal barrier | mm |
| P | relevant combined load for wind, snow and self weight | Pa |
| R | distance between structural seal and glass edge | mm |
| S | glass area | m ² |
| T | thickness of the thickest glass pane | mm |
| σ_d | design stress of the sealant | MPa |
| β | coefficient depending on the relative thickness of insulating glass panes | |
| Δa | maximum difference in altitude between production transport and assembly at site | m |

NOTE An accurate method of distribution of the load between the two panes is provided in prEN 16612.