

**TELEVISIOONI-, HELI- JA MULTIMEEDIASIGNAALIDE
KAABELVÕRGUD. OSA 11: OHUTUS**

**Cable networks for television signals, sound signals and
interactive services - Part 11: Safety**

EESTI STANDARDI EESSÕNA**NATIONAL FOREWORD**

See Eesti standard EVS-EN 60728-11:2017 sisaldab Euroopa standardi EN 60728-11:2017 ingliskeelset teksti.	This Estonian standard EVS-EN 60728-11:2017 consists of the English text of the European standard EN 60728-11:2017.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas.	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation.
Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 26.05.2017.	Date of Availability of the European standard is 26.05.2017.
Standard on kättesaadav Eesti Standardikeskusest.	The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile standardiosakond@evs.ee.

ICS 33.060.40

Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:
Koduleht www.evs.ee; telefon 605 5050; e-post info@evs.ee

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:

Homepage www.evs.ee; phone +372 605 5050; e-mail info@evs.ee

English Version

**Cable networks for television signals, sound signals
and interactive services -
Part 11: Safety
(IEC 60728-11:2016 + COR1:2016)**

Réseaux de distribution par câbles pour signaux de
télévision, signaux de radiodiffusion sonore et services
interactifs -
Partie 11: Sécurité
(IEC 60728-11:2016 + COR1:2016)

Kabelnetze für Fernsehsignale, Tonsignale und interaktive
Dienste -
Teil 11: Sicherheitsanforderungen
(IEC 60728-11:2016 + COR1:2016)

This European Standard was approved by CENELEC on 2016-04-28. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

The text of document 100/2592/FDIS, future edition 4 of IEC 60728-11 prepared by Technical Area 5 “Cable networks for television signals, sound signals and interactive services” of IEC/TC 100 “Audio, video and multimedia systems and equipment” was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 60728-11:2017.

The following dates are fixed:

- latest date by which the document has to be (dop) 2017-11-26
implemented at national level by
publication of an identical national
standard or by endorsement
- latest date by which the national (dow) 2020-05-26
standards conflicting with the
document have to be withdrawn

This document supersedes EN 60728-11:2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

For this European Standard the informative Annex C of IEC 60728-11:2016 shall be disregarded and has been replaced by the Annexes ZB, A deviations and ZC, Special National Conditions.

Endorsement notice

The text of the International Standard IEC 60728-11:2016 + COR1:2016 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60364 Series	NOTE	Harmonized as HD 60364 Series.
IEC 60728-1	NOTE	Harmonized as EN 60728-1.

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cenelec.eu

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
-	-	Coaxial cables	EN 50117	Series
-	-	Lightning Protection Components (LPC) - Part 1: Requirements for connection components	EN 50164-1	-
-	-	Lightning Protection Components (LPC) - Part 2: Requirements for conductors and earth electrodes	EN 50164-2	-
-	-	Information technology - Cabling installation - Part 2: Installation planning and practices inside buildings	EN 50174-2	-
-	-	Telecommunications bonding networks for buildings and other structures	EN 50310	-
IEC 60065 (mod)	2014	Audio, video and similar electronic apparatus - Safety requirements	EN 60065	2014
IEC 60364-1	-	Low-voltage electrical installations - Part 1: Fundamental principles, assessment of general characteristics, definitions	HD 60364-1	-
IEC 60364-4-44	-	Low-voltage electrical installations - Part 4-44: Protection for safety - Protection against voltage disturbances and electromagnetic disturbances	HD 60364-4-442	-
IEC 60364-5-52	-	Low-voltage electrical installations - Part 5-52: Selection and erection of electrical equipment - Wiring systems	HD 60364-5-52	-
IEC 60364-5-54	-	Low-voltage electrical installations - Part 5-54: Selection and erection of electrical equipment - Earthing arrangements and protective conductors	HD 60364-5-54	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60529	-	Degrees of protection provided by enclosures (IP Code)	EN 60529	-
IEC 60728-2	-	Cable networks for television signals, sound signals and interactive services - Part 2: Electromagnetic compatibility for equipment	EN 50083-2	-
IEC 60825-1	-	Safety of laser products - Part 1: Equipment classification and requirements	EN 60825-1	-
IEC 60825-2	-	Safety of laser products - Part 2: Safety of optical fibre communication systems (OFCS)	EN 60825-2	-
IEC 60950-1 (mod)	2005	Information technology equipment - Safety - Part 1: General requirements	EN 60950-1	2006
			+A11	2009
			+A12	2011
			+AC	2011
IEC 60990	-	Methods of measurement of touch current and protective conductor current	EN 60990	-
IEC 61140	2001	Protection against electric shock - Common aspects for installation and equipment	EN 61140	2002 ¹⁾
+A1 (mod)	2004		+A1	2006 ¹⁾
IEC 62305	Series	Protection against lightning	EN 62305	Series
IEC 62305-2 (mod)	2010	Protection against lightning - Part 2: Risk management	EN 62305-2	2012
IEC 62305-3 (mod)	2010	Protection against lightning - Part 3: Physical damage to structures and life hazard	EN 62305-3	2011
IEC 62305-4 (mod)	2010	Protection against lightning - Part 4: Electrical and electronic systems within structures	EN 62305-4	2011
ISO 3864-1	2011	Graphical symbols - Safety colours and safety signs - Part 1: Design principles for safety signs and safety markings	-	-

¹⁾ Superseded by EN 61140:2016 (IEC 61140:2016): DOW = 2019-05-27.

Annex ZB (informative)

A-deviations

A-deviation: National deviation due to regulations, the alteration of which is for the time being outside the competence of the CENELEC national member.

This European Standard does not fall under any Directive of the EU.

In the relevant CEN-CENELEC countries, these A-deviations are valid instead of the provisions of the European Standard until they have been removed.

<u>Clause</u>	<u>Deviation</u>
---------------	------------------

9	ZB.1 France
----------	--------------------

(Arrêté interministériel, 2 April 1991)

This regulation specifies, among many other parameters, the minimum distance between electric supply wires (isolated and not isolated, low-voltage and high-voltage) and any other installation (e.g. buildings, antennas, telecommunication lines, etc.).

The main clauses of this regulation which concern the cable networks are Clauses 12, 25, 26, 33, 33bis, 38, 49, 51, 52 and 63.

Clause 9 of this standard specifies distances of 10 mm (indoors) and 20 mm (outdoors) and this is not sufficient to cover overhead cables. As an example, the minimum distance between an overhead telecommunication line and an overhead low-voltage (up to 1 kV) electricity supply line shall be 1 m (Clause 33). This distance may be reduced under specified conditions (Clauses 51, 52 and 63).

This regulation specifies also the minimum distance from high-voltage lines. This distance varies from 1 m to 4 m depending on the voltage, on the isolation of the cable and on the location (built-up area or not) (Clauses 33 and 63)

10.1	ZB.2 United Kingdom
-------------	----------------------------

In the UK the use of fully isolated system outlets is obligatory.

11	ZB.3 France
-----------	--------------------

(NF C 15100 - Décret n° 84-74 du 26 janvier 1984 modifié)

The use of TT distribution systems with 300 mA differential switching is not compatible with the interconnection of the earthing of two different buildings.

Annex ZC (normative)

Special national conditions

Special national condition: National characteristic or practice that cannot be changed even over a long period, e.g. climatic conditions, electrical earthing conditions.

NOTE If it affects harmonization, it forms part of the European Standard.

For the countries in which the relevant special national conditions apply these provisions are normative, for other countries they are informative.

Clause Special National Condition

6.2 ZC.1 Norway

The following parts of the standard are not applicable due to Special National Conditions:

- For new and rebuilt coaxial electronic communication networks the outer conductor of the coaxial cable leading into a building shall be galvanic and isolated from the outer conductor of the coaxial cable inside the building;
- Examples of installations inside buildings described in 6.2g, 6.2i, 6.2l and shown in Figure 2, Figure 4, Figure 5 and Figure 7 shall be equipped with a galvanic isolator separating local earth from the cable network distribution lines;
- Galvanic isolators shall withstand the following requirements:
- Applying a 50 Hz AC voltage of 300 V_{RMS} between the input and the output of the outer conductor of the galvanic isolator for a period of not less than 20 min, the leakage current shall not exceed 8 mA_{RMS}. Applying a continuous DC voltage of 2 120 V between the input and the output of the outer conductor of the galvanic isolator for a period of not less than 1 min, the leakage current shall not exceed 0,7 mA.


It shall not be possible to touch metallic parts of the galvanic isolator when connected.

6.3 ZC.2 Norway

ZC.2.1 Justification

In most parts of Norway, the AC mains power are built as an IT- or TT-network with a line-to-line voltage of 230 V (see Figure ZC.1).

These types of networks have no N-conductor, and the AC mains power is supplied to the equipment from two of the three line conductors (IEC 60950-1:2005, Annex V).

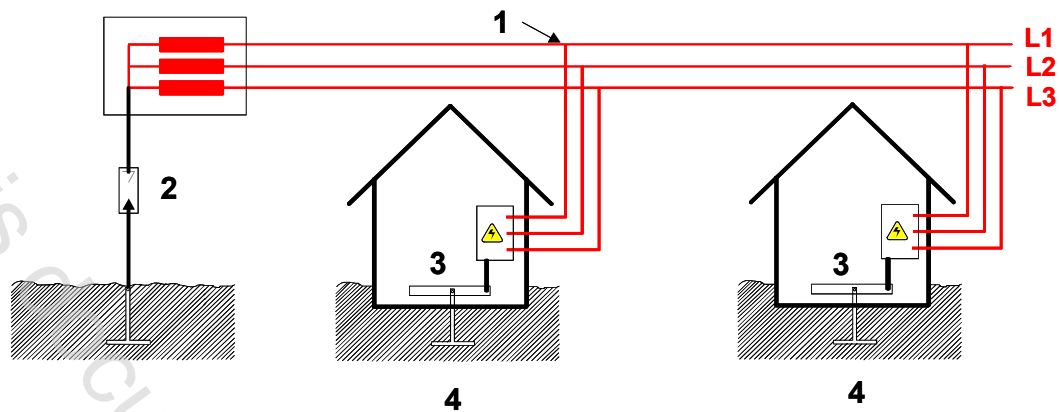

1 AC power distribution, IT system, line-to-line voltage 230 V	2 Voltage limiter
3 Equipotential bonding bar	4 Earth electrode

Figure ZC.1 – IT power distribution system in Norway

For a cable network covering an area with this type of power supply networks, special initiative should be taken to ensure that safety in the cable network is maintained. The following equipotential bonding arrangements described will provide necessary safety in such a network.


ZC.2.2 Equipotential bonding mechanism for cable networks

ZC.2.2.1 Installations in the vicinity of transformer stations

Any earth electrode in a cable network shall preferably be located at a minimum distance of 20 m from the nearest earth electrode in a high-power transformer station (high to mains voltage) (see Figure ZC.2 and ITU-T K.8 or EN 50174-3).

If the above-mentioned distance is less than 20 m, all equipment in the cable network shall be electrically isolated from local earth by mounting the equipment within a non-metallic enclosure, as shown in Figure ZC.3. Mains powered equipment with local power feeding should not be used in this case.

Before any work on the installation is started, measurements shall be carried out to reveal if there are any hazardous voltages between local earth and the earth for the cable network.

The safety sign "Warning about hazardous electrical voltage"  according to sign 7.4 of ISO 3864-1:2002 shall be attached to the non-metallic enclosure.

ZC.2.2.2 Cabinets for cable networks located near cabinets/ installations for mains

Cabinets for cable networks placed together with cabinets for mains power distributions should preferably be placed at a minimum of 2 m apart. If the distance is closer than 2 m, a common earth electrode between the cabinets shall be used. Examples of such installations are shown in Figure ZC.4, Figure ZC.5, Figure ZC.6 and Figure ZC.7.



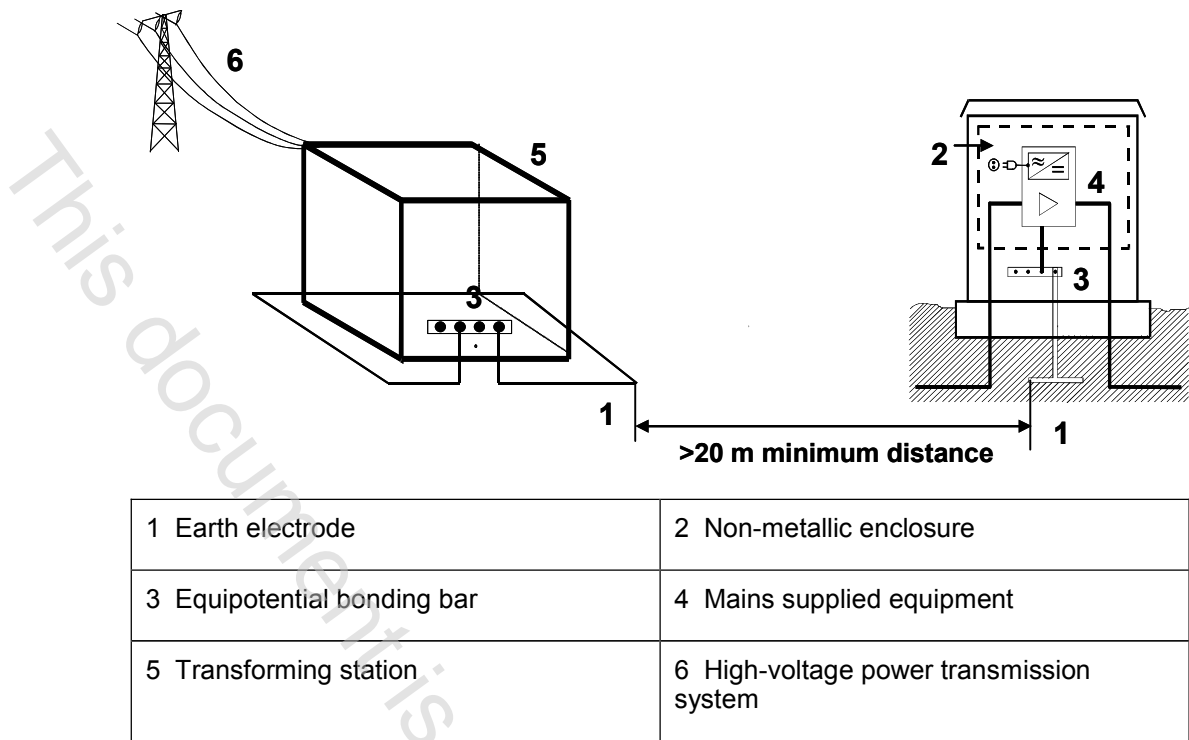


Figure ZC.2 – Example of installations located farther than 20 m away from a transforming station

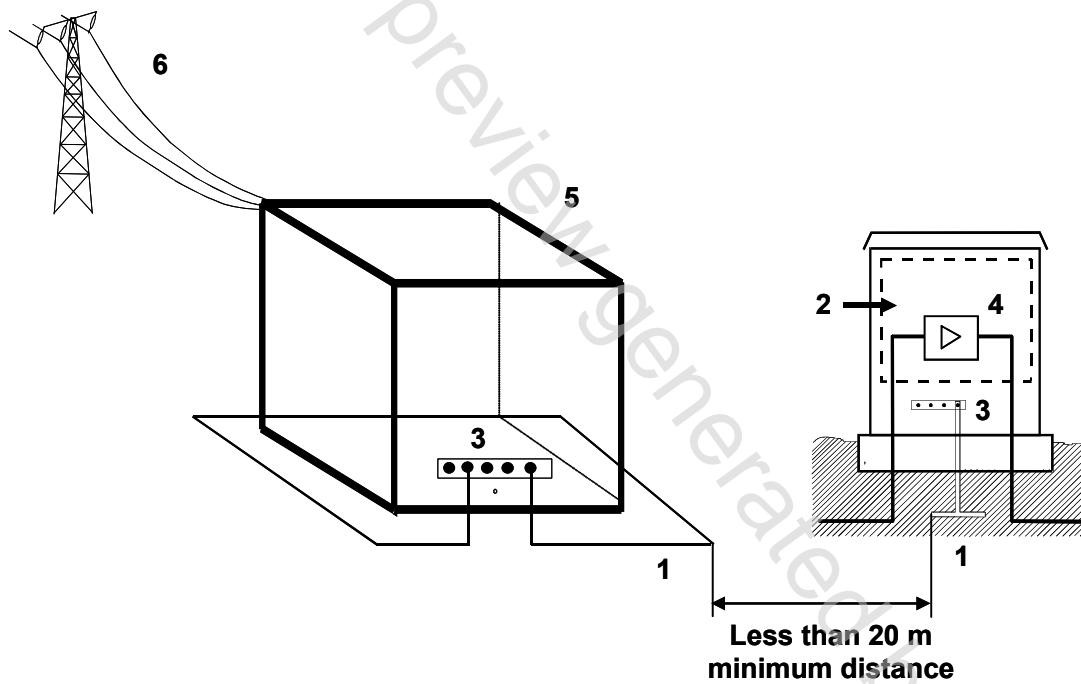


1 Earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Remotely supplied equipment
5 Transforming station	6 High-voltage power transmission system

Figure ZC.3 – Example of installations located closer than 20 m from a transforming station

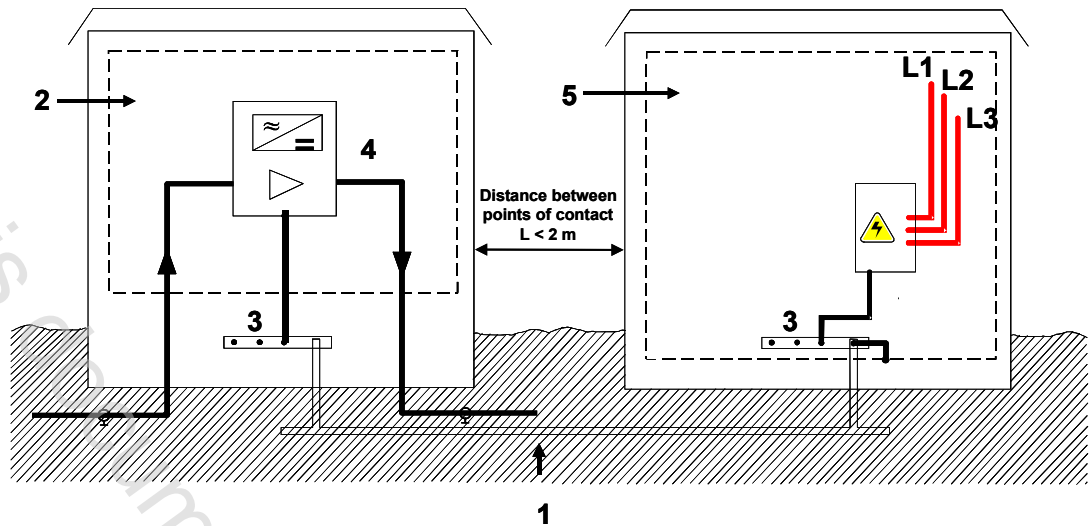

1 Common earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Mains supplied equipment
5 Metallic enclosure	

Figure ZC.4 – Example of cabinets for cable network with locally fed equipment and mains placed less than 2 m apart

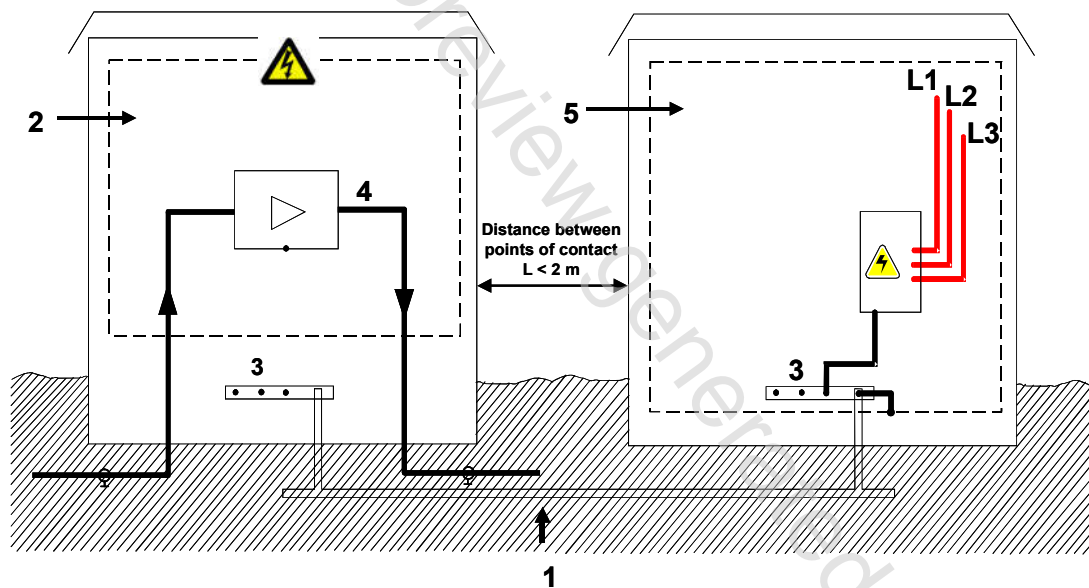

1 Common earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Remotely supplied equipment
5 Metallic enclosure	

Figure ZC.5 – Example of cabinets for cable network with remotely fed equipment and mains placed less than 2 m apart

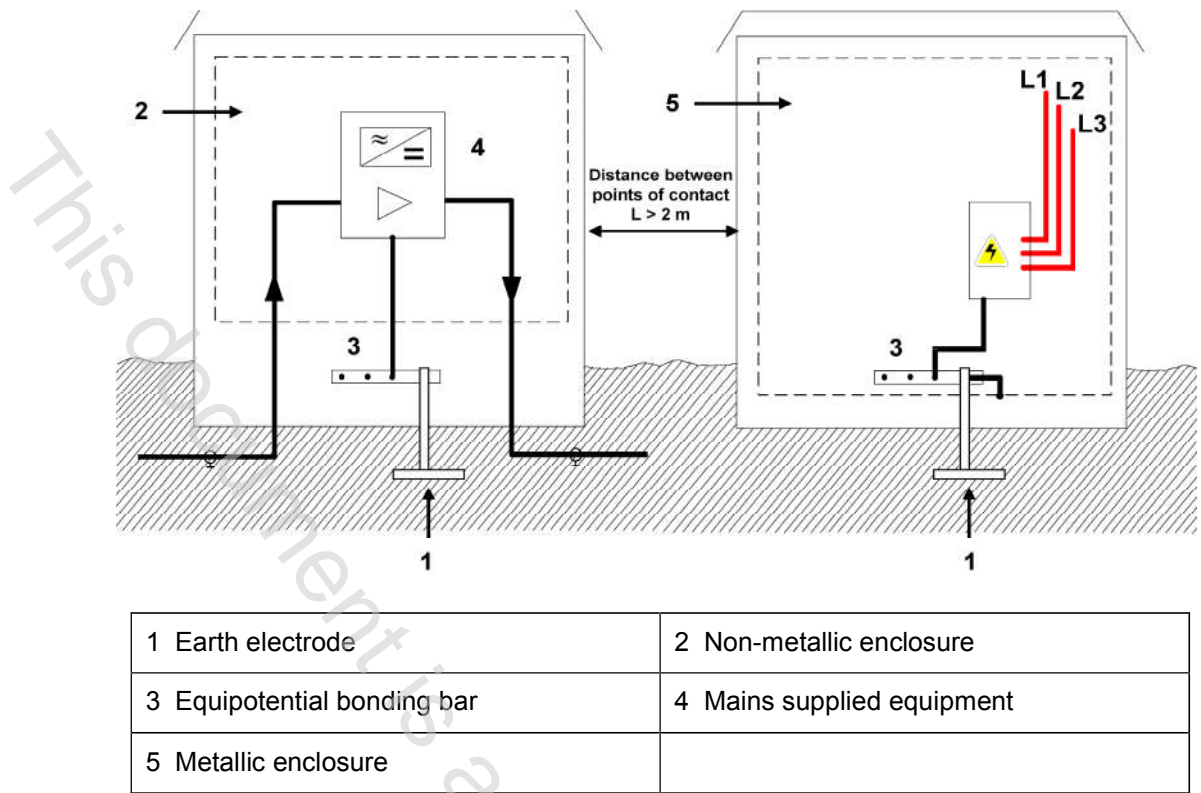


Figure ZC.6 – Example of cabinets for cable network with locally fed equipment and mains placed more than 2 m apart

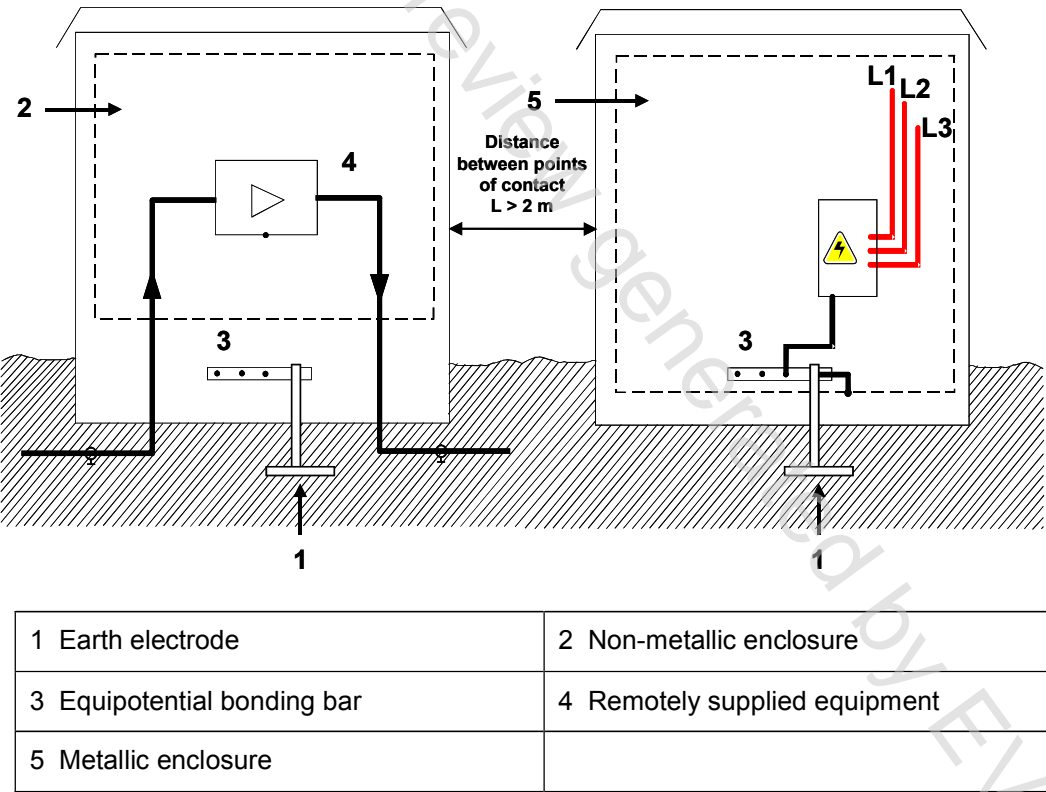


Figure ZC.7 – Example of cabinets for cable network with remotely fed equipment and mains placed more than 2 m apart