

Infotehnoloogia. Videosignaali ja sellega seotud heliinformatsiooni üldkodeerimine. Osa 1: Süsteemid

Information technology - Generic coding of moving pictures and associated audio information - Part 1: Systems

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

Käesolev Eesti standard EVS-EN ISO/IEC 13818-1:1999 sisaldab Euroopa standardi EN ISO/IEC 13818-1:1997 ingliskeelset teksti. Käesolev dokument on jõustatud 12.12.1999 ja selle kohta on avaldatud teade Eesti standardiorganisatsiooni ametlikus väljaandes. Standard on kättesaadav Eesti standardiorganisatsioonist.	This Estonian standard EVS-EN ISO/IEC 13818-1:1999 consists of the English text of the European standard EN ISO/IEC 13818-1:1997. This document is endorsed on 12.12.1999 with the notification being published in the official publication of the Estonian national standardisation organisation. The standard is available from Estonian standardisation organisation.
--	---

Käsitlusala: Käesolev soovitus/rahvusvaheline standard esitab kodeerimise süsteemikihi. Standard on loodud peamiselt standardi ISO/IEC 13818 osades 2 ja 3 määratletud video- ja helikodeerimise meetodite kombinatsiooni toetamiseks.	Scope:
---	----------------------

ICS 35.040

Võtmesõnad: andmeteisendus, andmetöötlus, arvutigraafika, audioandmed, filmid, helisalvestus, kodeerimine (andmeteisendus), süsteemi arhitektuur, video salvestamine, videoandmed

ISC 35.040

Deskriptoren:

Deutsche Fassung

Informationstechnik

Codierung von bewegten Bildern und damit verbundenen Toninformationen

Teil 1: Systeme

(ISO/IEC 13818-1 : 1996)

Information technology – Generic of coding of moving pictures and associated audio information – Part 1: Systems
(ISO/IEC 13818-1 : 1996)

Technologies de l'information – codage générique des images animées et des informations sonores associées – Partie 1: Systèmes
(ISO/IEC 13818-1 : 1996)

Diese Europäische Norm wurde von CEN am 1997-01-19 angenommen.

Die CEN-Mitglieder sind gehalten, die CEN/CENELEC-Geschäftsordnung zu erfüllen, in der die Bedingungen festgelegt sind, unter denen dieser Europäischen Norm ohne jede Änderung der Status einer nationalen Norm zu geben ist.

Auf dem letzten Stand befindliche Listen dieser nationalen Normen mit ihren bibliographischen Angaben sind beim Zentralsekretariat oder bei jedem CEN-Mitglied auf Anfrage erhältlich.

Diese Europäische Norm besteht in drei offiziellen Fassungen (Deutsch, Englisch, Französisch). Eine Fassung in einer anderen Sprache, die von einem CEN-Mitglied in eigener Verantwortung durch Übersetzung in seine Landessprache gemacht und dem Zentralsekretariat mitgeteilt worden ist, hat den gleichen Status wie die offiziellen Fassungen.

CEN-Mitglieder sind die nationalen Normungsinstitute von Belgien, Dänemark, Deutschland, Finnland, Frankreich, Griechenland, Irland, Island, Italien, Luxemburg, Niederlande, Norwegen, Österreich, Portugal, Schweden, Schweiz, Spanien und dem Vereinigten Königreich.

CEN

EUROPÄISCHES KOMITEE FÜR NORMUNG
European Committee for Standardization
Comité Européen de Normalisation

Zentralsekretariat: rue de Stassart 36, B-1050 Brüssel

Vorwort

Der Text der Internationalen Norm vom Technischen Komitee ISO/IEC/JTC 1 "Information technology" der "International Organization for Standardization" (ISO) und die "International Electrotechnical Commission" (IEC) wurde als Europäische Norm durch das Technische Büro vom CEN übernommen.

Dieses Dokument ist derzeit zum einstufigen Annahmeverfahren vorgelegt.

Anerkennungsnotiz

Der Text der Internationalen Norm ISO/IEC 13818-1 : 1996 wurde von CEN als Europäische Norm ohne irgendeine Abänderung genehmigt.

This document is a preview generated by EVS

**Information technology — Generic coding
of moving pictures and associated audio
information: Systems**

*Technologies de l'information — Codage des images animées et du son
associé. Systèmes*

CONTENTS

	<i>Page</i>
Introduction	vi
Intro. 1 Transport Stream	vii
Intro. 2 Program Stream	ix
Intro. 3 Conversion between Transport Stream and Program Stream	x
Intro. 4 Packetized Elementary Stream	x
Intro. 5 Timing model	x
Intro. 6 Conditional access	xi
Intro. 7 Multiplex-wide operations	xi
Intro. 8 Individual stream operations (PES Packet Layer)	xi
Intro. 8.1 Demultiplexing	xi
Intro. 8.2 Synchronization	xii
Intro. 8.3 Relation to compression layer	xii
Intro. 9 System reference decoder	xii
Intro. 10 Applications	xii
SECTION 1 – GENERAL	1
1.1 Scope	1
1.2 Normative references	1
1.3 Identical Recommendations / International Standards	1
1.4 Additional references	2
SECTION 2 – TECHNICAL ELEMENTS	2
2.1 Definitions	2
2.2 Symbols and abbreviations	5
2.2.1 Arithmetic operators	5
2.2.2 Logical operators	6
2.2.3 Relational operators	6
2.2.4 Bitwise operators	6
2.2.5 Assignment	6
2.2.6 Mnemonics	6
2.2.7 Constants	7
2.3 Method of describing bit stream syntax	7
2.4 Transport Stream bitstream requirements	8
2.4.1 Transport Stream coding structure and parameters	8
2.4.2 Transport Stream system target decoder	8
2.4.3 Specification of the Transport Stream syntax and semantics	17
2.4.3.2 Transport Stream packet layer	18
2.4.3.3 Semantic definition of fields in Transport Stream packet layer	18
2.4.3.4 Adaptation field	20
2.4.3.5 Semantic definition of fields in adaptation field	20
2.4.3.6 PES packet	29

2.4.3.7	Semantic definition of fields in PES packet.....	29
2.4.3.8	Carriage of Program Streams and ISO/IEC 11172-1 Systems streams in the Transport Stream.....	38
2.4.4	Program specific information.....	39
2.4.4.1	Pointer.....	41
2.4.4.2	Semantics definition of fields in pointer syntax.....	41
2.4.4.3	Program association Table.....	41
2.4.4.4	Table_id assignments.....	42
2.4.4.5	Semantic definition of fields in program association section.....	42
2.4.4.6	Conditional access Table.....	43
2.4.4.7	Semantic definition of fields in conditional access section.....	43
2.4.4.8	Program Map Table.....	44
2.4.4.9	Semantic definition of fields in Transport Stream program map section.....	44
2.4.4.10	Syntax of the Private section.....	46
2.4.4.11	Semantic definition of fields in private section.....	46
2.5	Program Stream bitstream requirements.....	47
2.5.1	Program Stream coding structure and parameters.....	47
2.5.2	Program Stream system target decoder.....	47
2.5.2.1	System clock frequency.....	48
2.5.2.2	Input to the Program Stream system target decoder.....	49
2.5.2.3	Buffering.....	49
2.5.2.4	PES streams.....	50
2.5.2.5	Decoding and presentation.....	51
2.5.3	Specification of the Program Stream syntax and semantics.....	51
2.5.3.1	Program Stream.....	51
2.5.3.2	Semantic definition of fields in Program Stream.....	51
2.5.3.3	Pack layer of Program Stream.....	51
2.5.3.4	Semantic definition of fields in program stream pack.....	52
2.5.3.5	System header.....	53
2.5.3.6	Semantic definition of fields in system header.....	53
2.5.3.7	Packet layer of Program Stream.....	55
2.5.4	Program Stream map.....	55
2.5.4.1	Syntax of Program Stream map.....	55
2.5.4.2	Semantic definition of fields in Program Stream map.....	56
2.5.5	Program Stream directory.....	57
2.5.5.1	Syntax of Program Stream directory packet.....	57
2.5.5.2	Semantic definition of fields in Program Stream directory.....	57
2.6	Program and program element descriptors.....	59
2.6.1	Semantic definition of fields in program and program element descriptors.....	59
2.6.2	Video stream descriptor.....	60
2.6.3	Semantic definitions of fields in video stream descriptor.....	60
2.6.4	Audio stream descriptor.....	61
2.6.5	Semantic definition of fields in audio stream descriptor.....	61
2.6.6	Hierarchy descriptor.....	61
2.6.7	Semantic definition of fields in hierarchy descriptor.....	62
2.6.8	Registration descriptor.....	62
2.6.9	Semantic definition of fields in registration descriptor.....	63
2.6.10	Data stream alignment descriptor.....	63
2.6.11	Semantics of fields in data stream alignment descriptor.....	63
2.6.12	Target background grid descriptor.....	64
2.6.13	Semantics of fields in target background grid descriptor.....	64
2.6.14	Video window descriptor.....	65
2.6.15	Semantic definition of fields in video window descriptor.....	65
2.6.16	Conditional access descriptor.....	65
2.6.17	Semantic definition of fields in conditional access descriptor.....	66
2.6.18	ISO 639 language descriptor.....	66
2.6.19	Semantic definition of fields in ISO 639 language descriptor.....	66

2.6.20	System clock descriptor	66
2.6.21	Semantic definition of fields in system clock descriptor	67
2.6.22	Multiplex buffer utilization descriptor	67
2.6.23	Semantic definition of fields in multiplex buffer utilization descriptor	67
2.6.24	Copyright descriptor	68
2.6.25	Semantic definition of fields in copyright descriptor	68
2.6.26	Maximum bitrate descriptor	68
2.6.27	Semantic definition of fields in maximum bitrate descriptor	68
2.6.28	Private data indicator descriptor	69
2.6.29	Semantic definition of fields in Private data indicator descriptor	69
2.6.30	Smoothing buffer descriptor	69
2.6.31	Semantic definition of fields in smoothing buffer descriptor	70
2.6.32	STD descriptor	70
2.6.33	Semantic definition of fields in STD descriptor	70
2.6.34	IBP descriptor	70
2.6.35	Semantic definition of fields in IBP descriptor	70
2.7	Restrictions on the multiplexed stream semantics	71
2.7.1	Frequency of coding the system clock reference	71
2.7.2	Frequency of coding the program clock reference	71
2.7.3	Frequency of coding the elementary stream clock reference	71
2.7.4	Frequency of presentation timestamp coding	71
2.7.5	Conditional coding of timestamps	71
2.7.6	Timing constraints for scalable coding	72
2.7.7	Frequency of coding P-STD_buffer_size in PES packet headers	72
2.7.8	Coding of system header in the Program Stream	72
2.7.9	Constrained system parameter Program Stream	73
2.7.10	Transport Stream	73
2.8	Compatibility with ISO/IEC 11172	74
Annex A	– CRC Decoder Model	75
A.0	CRC decoder model	75
Annex B	– Digital Storage Medium Command and Control (DSM-CC)	76
B.0	Introduction	76
B.0.1	Purpose	76
B.0.2	Future applications	76
B.0.3	Benefits	76
B.0.4	Basic functions	77
B.0.4.1	Stream selection	77
B.0.4.2	Retrieval	77
B.0.4.3	Storage	77
B.1	General elements	77
B.1.1	Scope	77
B.1.2	Overview of the DSM-CC application	77
B.1.3	The transmission of DSM-CC commands and acknowledgments	78
B.2	Technical elements	79
B.2.1	Definitions	79
B.2.2	Specification of DSM-CC syntax	80
B.2.3	Semantics of fields in specification of DSM-CC syntax	80
B.2.4	Control layer	81
B.2.5	Semantics of fields in control layer	81
B.2.6	Acknowledgment layer	82
B.2.7	Semantics of fields in acknowledgment layer	83
B.2.8	Time code	83
B.2.9	Semantics of fields in time code	84
Annex C	– Program Specific Information	85
C.0	Explanation of Program Specific Information in Transport Streams	85
C.1	Introduction	85
C.2	Functional Mechanism	85

C.3	The Mapping of Sections into Transport Stream Packets	86
C.4	Repetition Rates and Random Access	86
C.5	What is a Program?	86
C.6	Allocation of program_number	87
C.7	Usage of PSI in a Typical System	87
C.8	The Relationships of PSI Structures	88
C.8.1	Program Association Table	88
C.8.2	Program Map Table	88
C.8.3	Conditional Access Table	88
C.8.4	Network Information Table	90
C.8.5	Private_section()	90
C.8.6	Descriptors	90
C.9	Bandwidth Utilization and Signal Acquisition Time	90
Annex D	– Systems Timing Model and Application Implications of this Recommendation International Standard	93
D.0	Introduction	93
D.0.1	Timing Model	93
D.0.2	Audio and Video Presentation Synchronization	94
D.0.3	System Time Clock recovery in the decoder	96
D.0.4	SCR and PCR Jitter	98
D.0.5	Clock Recovery in the Presence of Network Jitter	99
D.0.6	System clock used for chroma sub-carrier generation	100
D.0.7	Component video and audio reconstruction	101
D.0.8	Frame Slipping	101
D.0.9	Smoothing of network jitter	101
Annex E	– Data Transmission Applications	103
E.0	General considerations	103
E.1	Suggestion	103
Annex F	– Graphics of Syntax for this Recommendation International Standard	104
F.0	Introduction	104
F.0.1	Transport Stream syntax	104
F.0.2	PES packet	105
F.0.3	Program Association Section	106
F.0.4	CA section	106
F.0.5	TS program map section	107
F.0.6	Private section	107
F.0.7	Program Stream	108
F.0.8	Program Stream map	109
Annex G	– General Information	110
G.0	General Information	110
G.0.1	Sync Byte Emulation	110
G.0.2	Skipped picture status and decoding process	110
G.0.3	Selection of PID Values	110
G.0.4	PES start_code emulation	110
Annex H	– Private Data	111
H.0	Private Data	111
Annex I	– Systems conformance and real-time interface	112
I.0	Systems conformance and real-time interface	112
Annex J	– Interfacing Jitter-Inducing Networks to MPEG-2 Decoders	113
J.0	Introduction	113
J.1	Network compliance models	113
J.2	Network specification for jitter smoothing	114
J.3	Example decoder implementations	115
J.3.1	Network adapter followed by an MPEG-2 decoder	115
J.3.2	Integrated decoder	115

Annex K – Splicing Transport Streams	117
K.0 Introduction.....	117
K.1 The different types of splicing point.....	117
K.1.1 Ordinary splicing points.....	117
K.1.2 Seamless splicing points	117
K.2 Decoder behaviour on splices	118
K.2.1 On non-seamless splices	118
K.2.2 On seamless splices.....	118
K.2.3 Buffer Overflow.....	118

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 13818-1 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in collaboration with ITU-T. The identical text is published as ITU-T Recommendation H.222.0.

ISO/IEC 13818 consists of the following parts, under the general title *Information technology — Generic coding of moving pictures and associated audio information*:

- *Part 1: Systems*
- *Part 2: Video*
- *Part 3: Audio*
- *Part 4: Compliance testing*
- *Part 6: Extensions for DSM-CC*
- *Part 9: Extension for real time interface for systems decoders*

Annex A forms an integral part of this part of ISO/IEC 13818. Annexes B to K are for information only.

Introduction

The systems part of this Recommendation | International Standard addresses the combining of one or more elementary streams of video and audio, as well as other data, into single or multiple streams which are suitable for storage or transmission. Systems coding follows the syntactical and semantic rules imposed by this Specification and provides information to enable synchronized decoding of decoder buffers over a wide range of retrieval or receipt conditions.

System coding shall be specified in two forms: the **Transport Stream** and the **Program Stream**. Each is optimized for a different set of applications. Both the Transport Stream and Program Stream defined in this Recommendation | International Standard provide coding syntax which is necessary and sufficient to synchronize the decoding and presentation of the video and audio information, while ensuring that data buffers in the decoders do not overflow or underflow. Information is coded in the syntax using time stamps concerning the decoding and presentation of coded audio and visual data and time stamps concerning the delivery of the data stream itself. Both stream definitions are packet-oriented multiplexes.

The basic multiplexing approach for single video and audio elementary streams is illustrated in Figure Intro. 1. The video and audio data is encoded as described in ITU-T Rec. H.262 | ISO/IEC 13818-2 and ISO/IEC 13818-3. The resulting compressed elementary streams are packetized to produce **PES packets**. Information needed to use PES packets independently of either Transport Streams or Program Streams may be added when PES packets are formed. This information is not needed and need not be added when PES packets are further combined with system level information to form **Transport Streams** or **Program Streams**. This systems standard covers those processes to the right of the vertical dashed line.

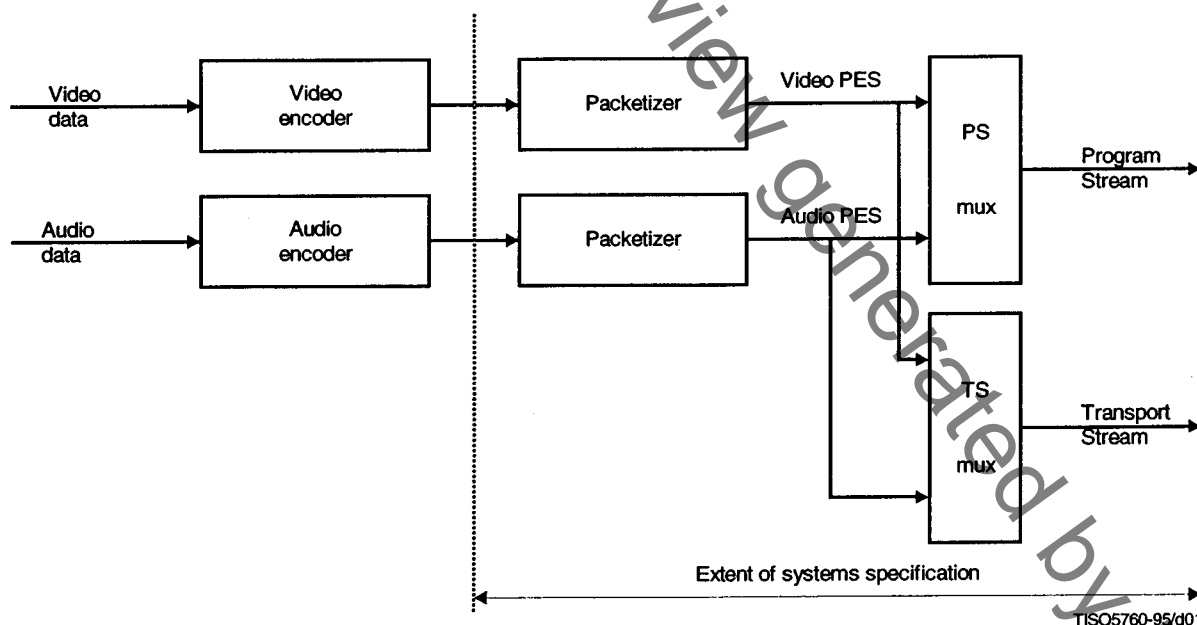


Figure Intro. 1 – Simplified overview the scope of this Recommendation | International Standard

The **Program Stream** is analogous and similar to ISO/IEC 11172 Systems layer. It results from combining one or more streams of PES packets, which have a common time base, into a single stream.

For applications that require the elementary streams which comprise a single program to be in separate streams which are not multiplexed, the elementary streams can also be encoded as separate Program Streams, one per elementary stream, with a common time base. In this case the values encoded in the SCR fields of the various streams shall be consistent.

Like the single Program Stream, all elementary streams can be decoded with synchronization.

The Program Stream is designed for use in relatively error-free environments and is suitable for applications which may involve software processing of system information such as interactive multi-media applications. Program Stream packets may be of variable and relatively great length.

The **Transport Stream** combines one or more programs with one or more independent time bases into a single stream. PES packets made up of elementary streams that form a program share a common timebase. The Transport Stream is designed for use in environments where errors are likely, such as storage or transmission in lossy or noisy media. Transport Stream packets are 188 bytes in length.

Program and Transport Streams are designed for different applications and their definitions do not strictly follow a layered model. It is possible and reasonable to convert from one to the other; however, one is not a subset or superset of the other. In particular, extracting the contents of a program from a Transport Stream and creating a valid Program Stream is possible and is accomplished through the common interchange format of PES packets, but not all of the fields needed in a Program Stream are contained within the Transport Stream; some must be derived. The Transport Stream may be used to span a range of layers in a layered model, and is designed for efficiency and ease of implementation in high bandwidth applications.

The scope of syntactical and semantic rules set forth in the systems specification differ: the syntactical rules apply to systems layer coding only, and do not extend to the compression layer coding of the video and audio specifications; by contrast, the semantic rules apply to the combined stream in its entirety.

The systems specification does not specify the architecture or implementation of encoders or decoders, nor those of multiplexors or demultiplexors. However, bit stream properties do impose functional and performance requirements on encoders, decoders, multiplexors and demultiplexors. For instance, encoders must meet minimum clock tolerance requirements. Notwithstanding this and other requirements, a considerable degree of freedom exists in the design and implementation of encoders, decoders, multiplexors, and demultiplexors.

Intro. 1 Transport Stream

The Transport Stream is a stream definition which is tailored for communicating or storing one or more programs of coded data according to ITU-T Rec. H.262 | ISO/IEC 13818-2 and ISO/IEC 13818-3 and other data in environments in which significant errors may occur. Such errors may be manifested as bit value errors or loss of packets.

Transport Streams may be either fixed or variable rate. In either case the constituent elementary streams may either be fixed or variable rate. The syntax and semantic constraints on the stream are identical in each of these cases. The Transport Stream rate is defined by the values and locations of Program Clock Reference (PCR) fields, which in general are separate PCR fields for each program.

There are some difficulties with constructing and delivering a Transport Stream containing multiple programs with independent time bases such that the overall bit rate is variable. Refer to 2.4.2.2.

The Transport Stream may be constructed by any method that results in a valid stream. It is possible to construct Transport Streams containing one or more programs from elementary coded data streams, from Program Streams, or from other Transport Streams which may themselves contain one or more programs.

The Transport Stream is designed in such a way that several operations on a Transport Stream are possible with minimum effort. Among these are:

- 1) Retrieve the coded data from one program within the Transport Stream, decode it and present the decoded results as shown in Figure Intro. 2.
- 2) Extract the Transport Stream packets from one program within the Transport Stream and produce as output a different Transport Stream with only that one program as shown in Figure Intro. 3.
- 3) Extract the Transport Stream packets of one or more programs from one or more Transport Streams and produce as output a different Transport Stream (not illustrated).
- 4) Extract the contents of one program from the Transport Stream and produce as output a Program Stream containing that one program as shown in Figure Intro. 4.
- 5) Take a Program Stream, convert it into a Transport Stream to carry it over a lossy environment, and then recover a valid, and in certain cases, identical Program Stream.

Figure Intro. 2 and Figure Intro. 3 illustrate prototypical demultiplexing and decoding systems which take as input a Transport Stream. Figure Intro. 2 illustrates the first case, where a Transport Stream is directly demultiplexed and decoded. Transport Streams are constructed in two layers:

- a system layer; and
- a compression layer.

The input stream to the Transport Stream decoder has a system layer wrapped about a compression layer. Input streams to the Video and Audio decoders have only the compression layer.

Operations performed by the prototypical decoder which accepts Transport Streams either apply to the entire Transport Stream ("multiplex-wide operations"), or to individual elementary streams ("stream-specific operations"). The Transport Stream system layer is divided into two sub-layers, one for multiplex-wide operations (the Transport Stream packet layer), and one for stream-specific operations (the PES packet layer).

A prototypical decoder for Transport Streams, including audio and video, is also depicted in Figure Intro. 2 to illustrate the function of a decoder. The architecture is not unique – some system decoder functions, such as decoder timing control, might equally well be distributed among elementary stream decoders and the channel specific decoder – but this figure is useful for discussion. Likewise, indication of errors detected by the channel specific decoder to the individual audio and video decoders may be performed in various ways and such communication paths are not shown in the diagram. The prototypical decoder design does not imply any normative requirement for the design of a Transport Stream decoder. Indeed non-audio/video data is also allowed, but not shown.

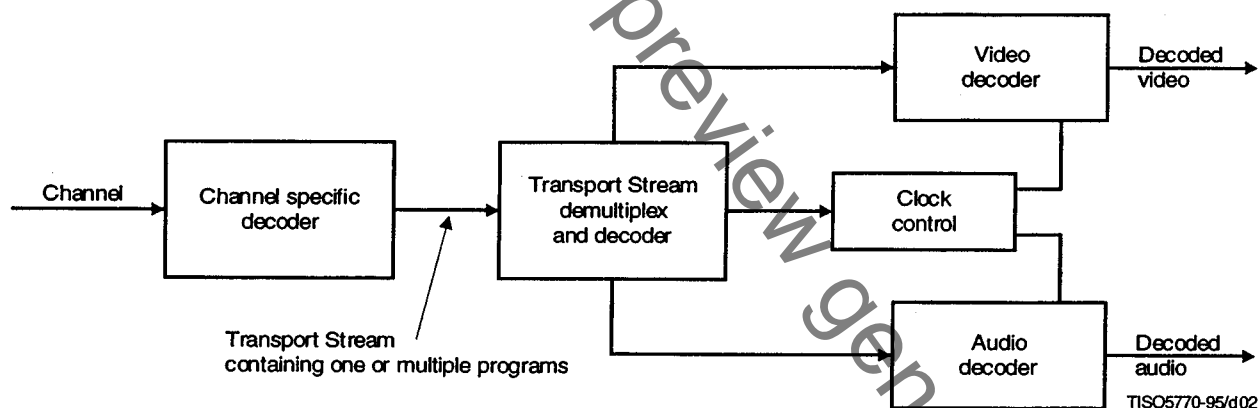


Figure Intro. 2 – Prototypical transport demultiplexing and decoding example

Figure Intro. 3 illustrates the second case, where a Transport Stream containing multiple programs is converted into a Transport Stream containing a single program. In this case the re-multiplexing operation may necessitate the correction of Program Clock Reference (PCR) values to account for changes in the PCR locations in the bit stream.

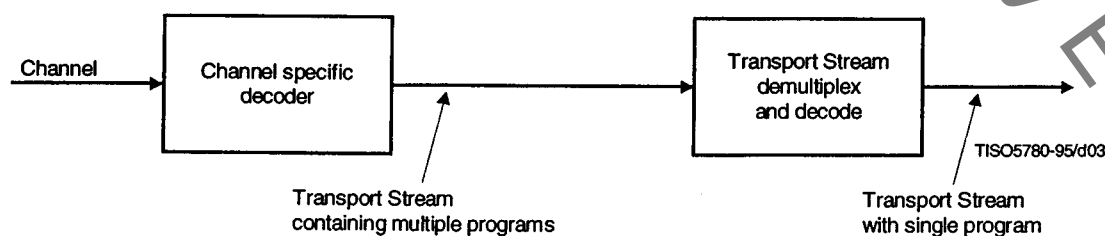


Figure Intro. 3 – Prototypical transport multiplexing example

Figure Intro. 4 illustrates a case in which an multi-program Transport Stream is first demultiplexed and then converted into a Program Stream.

Figures Intro. 3 and Intro. 4 indicate that it is possible and reasonable to convert between different types and configurations of Transport Streams. There are specific fields defined in the **Transport Stream** and **Program Stream** syntax which facilitate the conversions illustrated. There is no requirement that specific implementations of demultiplexors or decoders include all of these functions.

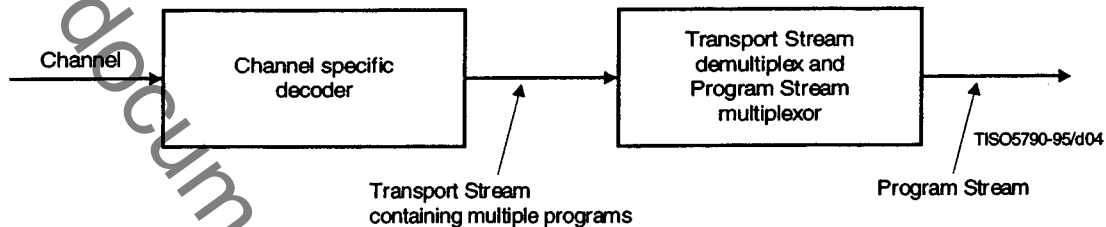


Figure Intro. 4 – Prototypical Transport Stream to Program Stream conversion

Intro. 2 Program Stream

The Program Stream is a stream definition which is tailored for communicating or storing one program of coded data and other data in environments where errors are very unlikely, and where processing of system coding, e.g. by software, is a major consideration.

Program Streams may be either fixed or variable rate. In either case, the constituent elementary streams may be either fixed or variable rate. The syntax and semantics constraints on the stream are identical in each case. The Program Stream rate is defined by the values and locations of the System Clock Reference (SCR) and mux_rate fields.

A prototypical audio/video Program Stream decoder system is depicted in Figure Intro. 5. The architecture is not unique – system decoder functions including decoder timing control might equally well be distributed among elementary stream decoders and the channel specific decoder – but this figure is useful for discussion. The prototypical decoder design does not imply any normative requirement for the design of an Program Stream decoder. Indeed non-audio/video data is also allowed, but not shown.

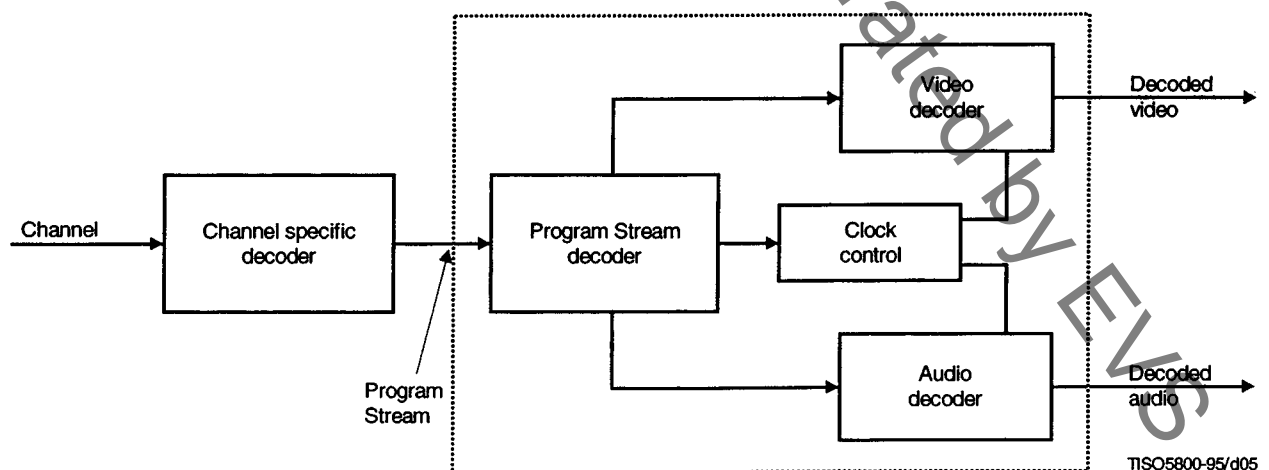


Figure Intro. 5 – Prototypical decoder for Program Streams

The prototypical decoder for Program Streams shown in Figure Intro. 5 is composed of System, Video, and Audio decoders conforming to Parts 1, 2, and 3, respectively, of ISO/IEC 13818. In this decoder, the multiplexed coded representation of one or more audio and/or video streams is assumed to be stored or communicated on some channel in some channel-specific format. The channel-specific format is not governed by this Recommendation | International Standard, nor is the channel-specific decoding part of the prototypical decoder.

The prototypical decoder accepts as input a Program Stream and relies on a Program Stream Decoder to extract timing information from the stream. The Program Stream Decoder demultiplexes the stream, and the elementary streams so produced serve as inputs to Video and Audio decoders, whose outputs are decoded video and audio signals. Included in the design, but not shown in the figure, is the flow of timing information among the Program Stream decoder, the Video and Audio decoders, and the channel-specific decoder. The Video and Audio decoders are synchronized with each other and with the channel using this timing information.

Program Streams are constructed in two layers: a system layer and a compression layer. The input stream to the Program Stream Decoder has a system layer wrapped about a compression layer. Input streams to the Video and Audio decoders have only the compression layer.

Operations performed by the prototypical decoder either apply to the entire Program Stream ("multiplex-wide operations"), or to individual elementary streams ("stream-specific operations"). The Program Stream system layer is divided into two sub-layers, one for multiplex-wide operations (the pack layer), and one for stream-specific operations (the PES packet layer).

Intro. 3 Conversion between Transport Stream and Program Stream

It may be possible and reasonable to convert between **Transport Streams** and **Program Streams** by means of PES packets. This results from the specification of **Transport Stream** and **Program Stream** as embodied in 2.4.1 and 2.5.1 of the normative requirements of this Recommendation | International Standard. PES packets may, with some constraints, be mapped directly from the payload of one multiplexed bit stream into the payload of another multiplexed bit stream. It is possible to identify the correct order of PES packets in a program to assist with this if the `program_packet_sequence_counter` is present in all PES packets.

Certain other information necessary for conversion, e.g. the relationship between elementary streams, is available in tables and headers in both streams. Such data, if available, shall be correct in any stream before and after conversion.

Intro. 4 Packetized Elementary Stream

Transport Streams and **Program Streams** are each logically constructed from PES packets, as indicated in the syntax definitions in 2.4.3.6. PES packets shall be used to convert between **Transport Streams** and **Program Streams**; in some cases the PES packets need not be modified when performing such conversions. PES packets may be much larger than the size of a **Transport Stream** packet.

A continuous sequence of PES packets of one elementary stream with one stream ID may be used to construct a PES Stream. When PES packets are used to form a PES stream, they shall include Elementary Stream Clock Reference (ESCR) fields and Elementary Stream Rate (ES_Rate) fields, with constraints as defined in 2.4.3.8. The PES stream data shall be contiguous bytes from the elementary stream in their original order. PES streams do not contain some necessary system information which is contained in **Program Streams** and **Transport Streams**. Examples include the information in the Pack Header, System Header, Program Stream Map, Program Stream Directory, Program Map Table, and elements of the **Transport Stream** packet syntax.

The PES Stream is a logical construct that may be useful within implementations of this Recommendation | International Standard; however, it is not defined as a stream for interchange and interoperability. Applications requiring streams containing only one elementary stream can use **Program Streams** or **Transport Streams** which each contain only one elementary stream. These streams contain all of the necessary system information. Multiple **Program Streams** or **Transport Streams**, each containing a single elementary stream, can be constructed with a common time base and therefore carry a complete program, i.e. with audio and video.

Intro. 5 Timing model

Systems, Video and Audio all have a timing model in which the end-to-end delay from the signal input to an encoder to the signal output from a decoder is a constant. This delay is the sum of encoding, encoder buffering, multiplexing, communication or storage, demultiplexing, decoder buffering, decoding, and presentation delays. As part of this timing model all video pictures and audio samples are presented exactly once, unless specifically coded to the contrary, and the inter-picture interval and audio sample rate are the same at the decoder as at the encoder. The system stream coding

contains timing information which can be used to implement systems which embody constant end-to-end delay. It is possible to implement decoders which do not follow this model exactly; however, in such cases it is the decoder's responsibility to perform in an acceptable manner. The timing is embodied in the normative specifications of this Recommendation | International Standard, which must be adhered to by all valid bit streams, regardless of the means of creating them.

All timing is defined in terms of a common system clock, referred to as a System Time Clock. In the Program Stream this clock may have an exactly specified ratio to the video or audio sample clocks, or it may have an operating frequency which differs slightly from the exact ratio while still providing precise end-to-end timing and clock recovery.

In the Transport Stream the system clock frequency is constrained to have the exactly specified ratio to the audio and video sample clocks at all times; the effect of this constraint is to simplify sample rate recovery in decoders.

Intro. 6 Conditional access

Encryption and scrambling for conditional access to programs encoded in the Program and Transport Streams is supported by the system data stream definitions. Conditional access mechanisms are not specified here. The stream definitions are designed so that implementation of practical conditional access systems is reasonable, and there are some syntactical elements specified which provide specific support for such systems.

Intro. 7 Multiplex-wide operations

Multiplex-wide operations include the coordination of data retrieval of the channel, the adjustment of clocks, and the management of buffers. The tasks are intimately related. If the rate of data delivery of the channel is controllable, then data delivery may be adjusted so that decoder buffers neither overflow nor underflow; but if the data rate is not controllable, then elementary stream decoders must slave their timing to the data received from the channel to avoid overflow or underflow.

Program Streams are composed of packs whose headers facilitate the above tasks. Pack headers specify intended times at which each byte is to enter the Program Stream Decoder from the channel, and this target arrival schedule serves as a reference for clock correction and buffer management. The schedule need not be followed exactly by decoders, but they must compensate for deviations about it.

Similarly, Transport Streams are composed of Transport Stream packets with headers containing information which specifies the times at which each byte is intended to enter a Transport Stream Decoder from the channel. This schedule provides exactly the same function as that which is specified in the Program Stream.

An additional multiplex-wide operation is a decoder's ability to establish what resources are required to decode a Transport Stream or Program Stream. The first pack of each Program Stream conveys parameters to assist decoders in this task. Included, for example, are the stream's maximum data rate and the highest number of simultaneous video channels. The Transport Stream likewise contains globally useful information.

The Transport Stream and Program Stream each contain information which identifies the pertinent characteristics of, and relationships between, the elementary streams which constitute each program. Such information may include the language spoken in audio channels, as well as the relationship between video streams when multi-layer video coding is implemented.

Intro. 8 Individual stream operations (PES Packet Layer)

The principal stream-specific operations are:

- 1) demultiplexing; and
- 2) synchronizing playback of multiple elementary streams.

Intro. 8.1 Demultiplexing

On encoding, Program Streams are formed by multiplexing elementary streams, and Transport Streams are formed by multiplexing elementary streams, Program Streams, or the contents of other Transport Streams. Elementary streams may include private, reserved, and padding streams in addition to audio and video streams. The streams are temporally subdivided into packets, and the packets are serialized. A PES packet contains coded bytes from one and only one elementary stream.

In the Program Stream both fixed and variable packet lengths are allowed subject to constraints as specified in 2.5.1 and 2.5.2. For Transport Streams the packet length is 188 bytes. Both fixed and variable PES packet lengths are allowed, and will be relatively long in most applications.

On decoding, demultiplexing is required to reconstitute elementary streams from the multiplexed Program Stream or Transport Stream. Stream_id codes in Program Stream packet headers, and Packet ID codes in the Transport Stream make this possible.

Intro. 8.2 Synchronization

Synchronization among multiple elementary streams is accomplished with Presentation Time Stamps (PTS) in the Program Stream and Transport streams. Time stamps are generally in units of 90 kHz, but the System Clock Reference (SCR), the Program Clock Reference (PCR) and the optional Elementary Stream Clock Reference (ESCR) have extensions with a resolution of 27 MHz. Decoding of N-elementary streams is synchronized by adjusting the decoding of streams to a common master time base rather than by adjusting the decoding of one stream to match that of another. The master time base may be one of the N-decoders' clocks, the data source's clock, or it may be some external clock.

Each program in a Transport Stream, which may contain multiple programs, may have its own time base. The time bases of different programs within a Transport Stream may be different.

Because PTSs apply to the decoding of individual elementary streams, they reside in the PES packet layer of both the Transport Streams and Program Streams. End-to-end synchronization occurs when encoders save time stamps at capture time, when the time stamps propagate with associated coded data to decoders, and when decoders use those time stamps to schedule presentations.

Synchronization of a decoding system with a channel is achieved through the use of the SCR in the Program Stream and by its analogue, the PCR, in the Transport Stream. The SCR and PCR are time stamps encoding the timing of the bit stream itself, and are derived from the same time base used for the audio and video PTS values from the same program. Since each program may have its own time base, there are separate PCR fields for each program in a Transport Stream containing multiple programs. In some cases it may be possible for programs to share PCR fields. Refer to 2.4.4, Program Specific Information (PSI), for the method of identifying which PCR is associated with a program. A program shall have one and only one PCR time base associated with it.

Intro. 8.3 Relation to compression layer

The PES packet layer is independent of the compression layer in some senses, but not in all. It is independent in the sense that PES packet payloads need not start at compression layer start codes, as defined in Parts 2 and 3 of ISO/IEC 13818. For example, video start codes may occur anywhere within the payload of a PES packet, and start codes may be split by a PES packet header. However, time stamps encoded in PES packet headers apply to presentation times of compression layer constructs (namely, presentation units). In addition, when the elementary stream data conforms to ITU-T Rec. H.262 | ISO/IEC 13818-2 or ISO/IEC 13818-3, the PES_packet_data_bytes shall be byte aligned to the bytes of this Recommendation | International Standard.

Intro. 9 System reference decoder

Part 1 of ISO/IEC 13818 employs a "System Target Decoder" (STD), one for Transport Streams (refer to 2.4.2) referred to as "Transport System Target Decoder" (T-STD) and one for Program Streams (refer to 2.5.2) referred to as "Program System Target Decoder" (P-STD), to provide a formalism for timing and buffering relationships. Because the STD is parameterized in terms of ITU-T Rec. H.222.0 | ISO/IEC 13818-1 fields (for example, buffer sizes) each elementary stream leads to its own parameterization of the STD. Encoders shall produce bit streams that meet the appropriate STD's constraints. Physical decoders may assume that a stream plays properly on its STD. The physical decoder must compensate for ways in which its design differs from that of the STD.

Intro. 10 Applications

The streams defined in this Recommendation | International Standard are intended to be as useful as possible to a wide variety of applications. Application developers should select the most appropriate stream.

Modern data communications networks may be capable of supporting ITU-T Rec. H.222.0 | ISO/IEC 13818-1 video and ISO/IEC 13818 audio. A real time transport protocol is required. The Program Stream may be suitable for transmission on such networks.

The Program Stream is also suitable for multimedia applications on CD-ROM. Software processing of the Program Stream may be appropriate.

The Transport Stream may be more suitable for error-prone environments, such as those used for distributing compressed bit-streams over long distance networks and in broadcast systems.

Many applications require storage and retrieval of ITU-T Rec. H.222.0 | ISO/IEC 13818-1 bitstreams on various Digital Storage Media (DSM). A Digital Storage Media Command and Control (DSM CC) protocol is specified in Annex B and Part 6 of ISO/IEC 13818 in order to facilitate the control of such media.

This document is a preview generated by EVS

INTERNATIONAL STANDARD

ITU-T RECOMMENDATION

INFORMATION TECHNOLOGY – GENERIC CODING OF MOVING
PICTURES AND ASSOCIATED AUDIO INFORMATION: SYSTEMS

SECTION 1 – GENERAL

1.1 Scope

This Recommendation | International Standard specifies the system layer of the coding. It was developed principally to support the combination of the video and audio coding methods defined in Parts 2 and 3 of ISO/IEC 13818. The system layer supports five basic functions:

- 1) the synchronization of multiple compressed streams on decoding;
- 2) the interleaving of multiple compressed streams into a single stream;
- 3) the initialization of buffering for decoding start up;
- 4) continuous buffer management; and
- 5) time identification.

An ITU-T Rec. H.222.0 | ISO/IEC 13818-1 multiplexed bit stream is either a **Transport Stream** or a **Program Stream**. Both streams are constructed from **PES packets** and packets containing other necessary information. Both stream types support multiplexing of video and audio compressed streams from one program with a common time base. The **Transport Stream** additionally supports the multiplexing of video and audio compressed streams from multiple programs with independent time bases. For almost error-free environments the **Program Stream** is generally more appropriate, supporting software processing of program information. The **Transport Stream** is more suitable for use in environments where errors are likely.

An ITU-T Rec. H.222.0 | ISO/IEC 13818-1 multiplexed bit stream, whether a Transport Stream or a Program Stream, is constructed in two layers: the outermost layer is the system layer, and the innermost is the compression layer. The system layer provides the functions necessary for using one or more compressed data streams in a system. The video and audio parts of this Specification define the compression coding layer for audio and video data. Coding of other types of data is not defined by this Specification, but is supported by the system layer provided that the other types of data adhere to the constraints defined in 2.7.

1.2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

1.3 Identical Recommendations | International Standards

- ITU-T Recommendation H.262 (1995) | ISO/IEC 13818-2: ...¹⁾, *Information technology – Generic coding of moving pictures and associated audio information: Video*.

¹⁾ To be published.