INTERNATIONAL STANDARD

ISO 6396

Second edition 2008-03-15

Earth-moving machinery — Determination of emission sound pressure level at operator's position — Dynamic test conditions

Engins de terrassement — Détermination du niveau de pression acoustique d'émission au poste de conduite — Conditions d'essai dynamique




PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below

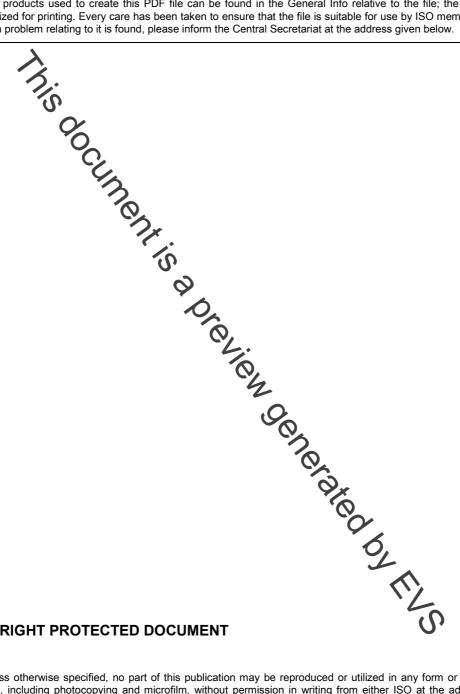



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Contents	Pa	ıge
Contents	Pa	ıge

Forewo	ordi	٧
Introdu	uction	٧
1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4	Instrumentation	2
5	Test environment	2
6 6.1 6.2 6.3	Measurement of time everaged A-weighted sound pressure levels Operator stature Operator presence Microphone	2
7 7.1 7.2	Set-up and operation of machine, and operator's position set-up	3
8 8.1 8.2	Acoustic measurements	4
9	Information to be recorded	4
10 10.1 10.2	Information to be recorded	5
Annex	A (normative) Declaration of sound emission data and uncertainty	7
Bibliog	Declaration of sound emission data and uncertainty	8

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in Maison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6396 was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 2, *Safety requirements and human factors*, in collaboration with Technical Committee ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*.

This second edition cancels and replaces the first edition (ISO 6396:1992), which has been technically revised.

Introduction

This International Standard is a specific test code for earth-moving machinery as defined in ISO 6165.

A simulated dynamic test condition, rather than an actual work cycle, is used. Simulated dynamic test conditions provide noise emission data which are repeatable and representative. Actual work cycle tests are

d dynamic provide noise e. and repealability can.

procedures are described in a sound pressure level in dynamic nents (bucket, dozer, etc.) for the manu. configuration most likely to exist when the ma.

International Standard embles compliance with noise .

I for evaluation purposes impose reduction investigations.

complementary test code is given in ISO 6395. This other specific itermine the noise emitted by early-maying machinery in terms of the A-le machine under dynamic test conditions.

Corresponding measurements of noise entitled to the environment and noise at the opestationary test conditions are described in ISO 6393 and ISO 6394, respectively. Specific procedures are described in this International Standard to enable the time-averaged A-weighted emission sound pressure level in dynamic test conditions to be determined in a manner which is repeatable. Attachments (bucket, dezer, etc.) for the manufacturer's production version are intended to be fitted since this is the configuration most likely to exist when the machine is in actual use.

This International Standard enables compliance with noise limits to be determined, if applicable. It can also be

A complementary test code is given in ISO 6395. This other specific test code is intended to be used to determine the noise emitted by earth-moving machinery in terms of the A-weighted sound power level, with

Corresponding measurements of noise entired to the environment and noise at the operator's position under

© ISO 2008 - All rights reserved

Inis document is a preview denetated by EUS

Earth-moving machinery — Determination of emission sound pressure level at operator's position — Dynamic test conditions

1 Scope

This International Standard specifies a method for determining the emission sound pressure level of earth-moving machinery at the operator's position, measured in terms of the time-averaged A-weighted emission sound pressure level while the machine is operating under dynamic test conditions.

It is applicable to earth-moving machinery as defined in ISO 6165 and as specified in ISO 6395:2008, Annex A.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3411, Earth-moving machinery — Physical dimensions of operators and minimum operator space envelope

ISO 6165, Earth-moving machinery — Basic types — Legatification and terms and definitions

ISO 6395:2008, Earth-moving machinery — Determination from sound power level — Dynamic test conditions

ISO 9249, Earth-moving machinery — Engine test code — Netpower

ISO 11201, Acoustics — Noise emitted by machinery and equipment — Measurement of emission sound pressure levels at a work station and at other specified positions—Figineering method in an essentially free field over a reflecting plane

IEC 61672-1, Electroacoustics — Sound level meters — Part 1: Specifications

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11201, 160 6165 and the following apply.

3.1

time-averaged A-weighted sound pressure level

 $L_{p\mathsf{A}.T}$

A-weighted sound pressure level averaged on an energy basis over the whole measurement period, T

© ISO 2008 – All rights reserved