

Sanitary Tapware - Electronic opening and closing sanitary tapware

Sanitary Tapware - Electronic opening and closing
sanitary tapware

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

<p>Käesolev Eesti standard EVS-EN 15091:2007 sisaldab Euroopa standardi EN 15091:2006 ingliskeelset teksti.</p> <p>Käesolev dokument on jõustatud 29.01.2007 ja selle kohta on avaldatud teade Eesti standardiorganisatsiooni ametlikus väljaandes.</p> <p>Standard on kättesaadav Eesti standardiorganisatsioonist.</p>	<p>This Estonian standard EVS-EN 15091:2007 consists of the English text of the European standard EN 15091:2006.</p> <p>This document is endorsed on 29.01.2007 with the notification being published in the official publication of the Estonian national standardisation organisation.</p> <p>The standard is available from Estonian standardisation organisation.</p>
--	---

<p>Käsitlusala:</p> <p>The purpose of the document is to define requirements for marking, identification, leaktightness, electrical and operational safety and mechanical resistance for sanitary tapware with opening and closing controlled electronically.</p>	<p>Scope:</p> <p>The purpose of the document is to define requirements for marking, identification, leaktightness, electrical and operational safety and mechanical resistance for sanitary tapware with opening and closing controlled electronically.</p>
--	--

ICS 91.140.70

Võtmesõnad:

ICS 91.140.70

English Version

**Sanitary tapware - Electronic opening and closing sanitary
tapware**

Robinetterie sanitaire - Robinet sanitaire à ouverture et
fermeture électronique

Sanitärarmaturen - Sanitärarmaturen mit elektronischer
Öffnungs- und Schließfunktion

This European Standard was approved by CEN on 4 November 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	5
Introduction	6
1 Scope	7
2 Normative references	9
3 Terms and definitions	11
4 General requirements and testing	11
4.1 Marking	11
4.2 Materials	12
4.3 Functions.....	12
4.4 Protection against pollution	12
4.5 Electric characteristics and requirements	12
4.6 Leaktightness characteristics	14
4.7 Pressure resistance characteristics	15
5 Requirements and testing for tapware	17
5.1 Scope	17
5.2 Dimensional characteristics	17
5.3 Hydraulic characteristics	25
5.4 Water hammer	32
5.5 Endurance	33
5.6 Acoustic characteristics	34
6 Requirements and testing for flushing valves for urinals	36
6.1 Scope	36
6.2 Definitions	36
6.3 Classification of flushing urinal valves	36
6.4 Designation	36
6.5 Dimensional characteristics	37
6.6 Hydraulic characteristics	38
6.7 Measurement of water hammer for urinal flushing valves	38
6.8 Mechanical endurance	39
7 Requirements and testing for flushing valves for WCs	40
7.1 Scope	40
7.2 Definitions	40
7.3 Classification.....	41
7.4 Dimensional characteristics	41
7.5 Hydraulic characteristics	43
7.6 Principle and verification of atmospheric pipe interrupters of WC flushing valves.....	43
7.7 Mechanical endurance	43
7.8 Acoustic characteristics	44
Annex A (normative) Recommendation for the design of pressure take-off tees.....	45
Bibliography	47

Figures contents

Figure 1 — Type 1 - Supply system with a pressure range of (0,05 to 1,0) MPa [(0,5 to 10) bar].....	8
Figure 2 — Type 2 - Supply system with a pressure range of (0,01 to 1,0) MPa [(0,1 to 10) bar].....	9
Figure 3 — Tap with visible body for horizontal surface	18
Figure 4 — Threaded inlets of taps with visible body for mounting on vertical surfaces	19
Figure 5 — Tapware with inlets and outlets aligned.....	19
Figure 6 — Tapware with inlets and outlets at right angles.....	20
Figure 7 — Mixing valves for horizontal mounting threaded inlet	21
Figure 8 — Mixing valves for horizontal mounting, stud connection	21
Figure 9 — Mixing valves with straight fittings	22
Figure 10 — Mixing valve with excentric unions.....	23
Figure 11 — Mixing valve with captive nuts	24
Figure 12 — Mixer with opposed inlets.....	25
Figure 13 — Supply circuits	26
Figure 14 — Test circuits for tapware intended for Type 1 water supply systems	28
Figure 15 — Mounting of mixing valves.....	29
Figure 16 — Flow rate test apparatus for taps intended for type 2 supply systems.....	30
Figure 17 — Test rig for water hammer test	32
Figure 18 — Top-entry urinal flushing valve	37
Figure 19 — Side-entry urinal flushing valve	37
Figure 20 — Side-entry WC flushing valves	43
Figure 21 — Top-entry WC flushing valves	43
Figure A.1 — Examples of pressure take-off tees.....	45

Tables Contents

Table 1 — Identification of the clauses of this standard	6
Table 2 — Conditions of use	7
Table 3 — Performance characteristics to be noted if used outside the recommended operating range	7
Table 4 — Summary of leaktightness tests	15
Table 5 — Dimensions.....	18
Table 6 — Dimensions of threaded inlets	19
Table 7 — Dimensions of threads	20
Table 8 — Dimensions of mixers	21
Table 9 — Dimensions.....	24
Table 10 — Dimensions of pipework	28
Table 11 — Flow rates and test pressures according to application	31
Table 12 — Acoustic groups	35
Table 13 — Classes of flow rate	35
Table 14 — Classification	36
Table 15 — Threads	37
Table 16 — Flow rate	38
Table 17 — Dimension of the supply pipe.....	39
Table 18 — Threads and outlet pipe	41
Table 19 — Permitted thread lengths	41

Foreword

This document (EN 15091:2006) has been prepared by Technical Committee CEN/TC 164 "Water supply", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2007, and conflicting national standards shall be withdrawn at the latest by June 2007.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Introduction

This standard is relevant for electrically operated (opening and closing) sanitary tapware used with sanitary appliances.

Such tapware can be operated by any electrical source e.g., mains, battery, etc.

Flow and temperature regulation devices installed either upstream or downstream of the tapware are not covered by this specification.

The purpose of this standard is to define requirements for the:

Marking, identification, leak-tightness, electrical and operational safety, mechanical performance and limitation of water hammer for electrical opening and closing tapware.

Dimensional, hydraulic, endurance, limitation of water hammer and acoustic characteristics are covered by the relevant product standards, when they exist.

Procedure of tests in order to verify these characteristics.

As for possible unfavourable effects of the product to which this standard applies, on the quality of water intended for human consumption:

- 1) no information is provided by this standard on possible use restrictions of the product in any of the member states of the EU or EFTA;
- 2) it should be noted that, while awaiting the adoption of verifiable European criteria, existing national regulations concerning the use and/or characteristics of this product remain in force.

Requirements for different products are defined in different clauses of this standard as illustrated in Table 1.

Table 1 — Identification of the clauses of this standard

	MARKING- IDENTIFICATION	ELECTRICAL SAFETY	OPERATIONAL SAFETY	LEAKTIGHTNESS	MECHANICAL RESISTANCE	HYDRAULIC CHARACTERISTICS	WATER HAMMER	WATER HAMMER FOLLOWING PRODUCT STANDARD
Clause 4. General requirements and testing	X	x	x	x	x			
Clause 5. Requirements and testing for tapware						x	x	
Clause 6. Requirements and testing for flushing valves for urinals						x	x	
Clause 7. Requirements and testing for flushing valves for WCs						x		x

1 Scope

The purpose of the document is to define requirements for marking, identification, leaktightness, electrical and operational safety and mechanical resistance for sanitary tapware with opening and closing controlled electronically.


The conditions of use for the supply system type are specified in Table 2:

Table 2 — Conditions of use

Water supply system		Limits of use		Recommended limits of operation
		Tapware with monostable solenoid valves	Tapware with bistable solenoid valves	
Type 1 (see Figure 1)	Minimum dynamic pressure	0,05 MPa (0,5 bar)	0,05 MPa (0,5 bar)	(0,1 to 0,5) MPa [(1 to 5) bar]
	Maximum static pressure	1 MPa (10 bar)	0,8 MPa (8 bar)	
Type 2 ^a (see Figure 2)	Minimum dynamic pressure	0,01 MPa (0,1 bar)	0,01 MPa (0,1 bar)	(0,01 to 0,2) MPa [(0,1 to 2) bar]
	Maximum static pressure	0,8 MPa (8 bar)	0,6 MPa (6 bar)	
Temperature of the water		≤ 75 °C	≤ 75 °C	≤ 65 °C
^a For Type 2, The manufacturer is to declare the minimum operating pressure at which opening, closing and the specified flow rate can be obtained. There is usually no acoustic classification for tapware used in supply systems of Type 2 and no specifications governing the level of noise emissions from these water installations. If supply pressures are such that excessive noise is generated it is recommended that pressure or flow regulators are fitted in the system. Or where practicable, tapware conforming to the appropriate acoustic classification are used.				

Table 3 — Performance characteristics to be noted if used outside the recommended operating range


Issue	Supply system type 1	Supply system type 2
Flow performance	Taps for Type 2 systems may result in excessive flow velocity	Taps for Type 1 system may not provide an acceptable flow rate
Noise	National regulations shall be observed, the criteria for classification in acoustic groups according to these national (special) regulations being different and more detailed than those given in this standard Taps for type 1 and type 2 systems may result in excessive noise when used above the recommended pressure.	

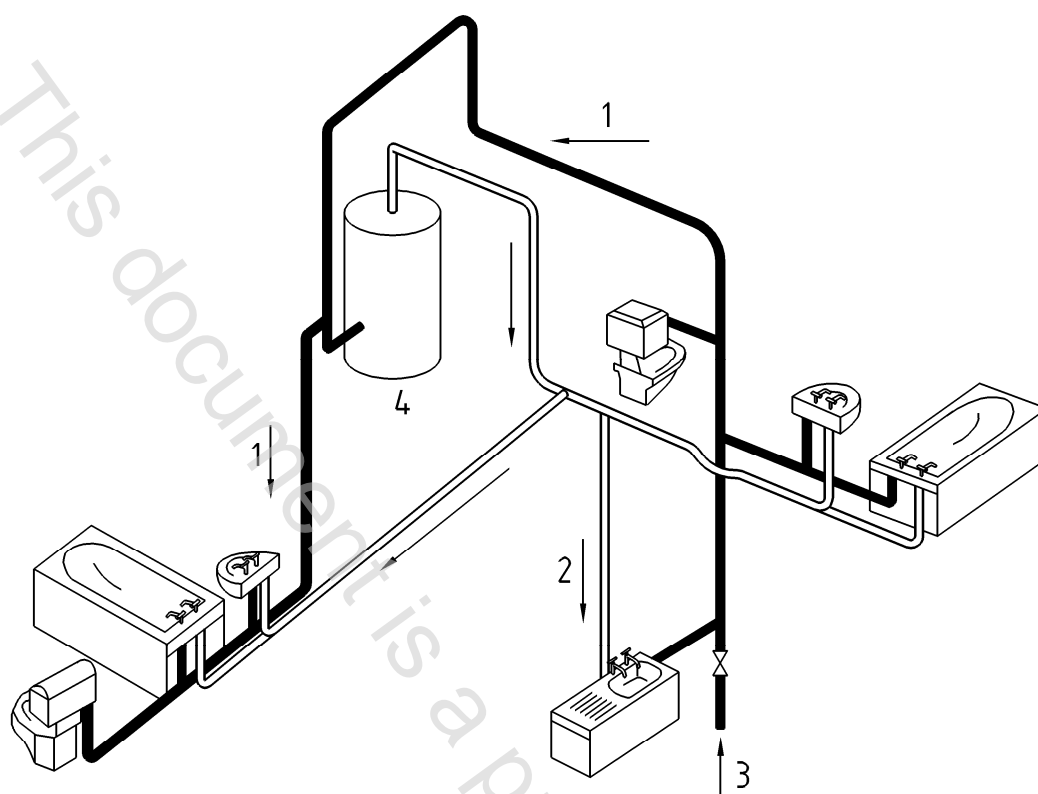

Key

- | | |
|--------------|--|
| 1 Cold water | 3 Mains supply pipe (Supply pressures from (0,05 to 1,0) MPa [(0,5 - 10) bar]) |
| 2 Hot water | 4 Water heater |

Figure 1 — Type 1 - Supply system with a pressure range of (0,05 to 1,0) MPa [(0,5 to 10) bar]

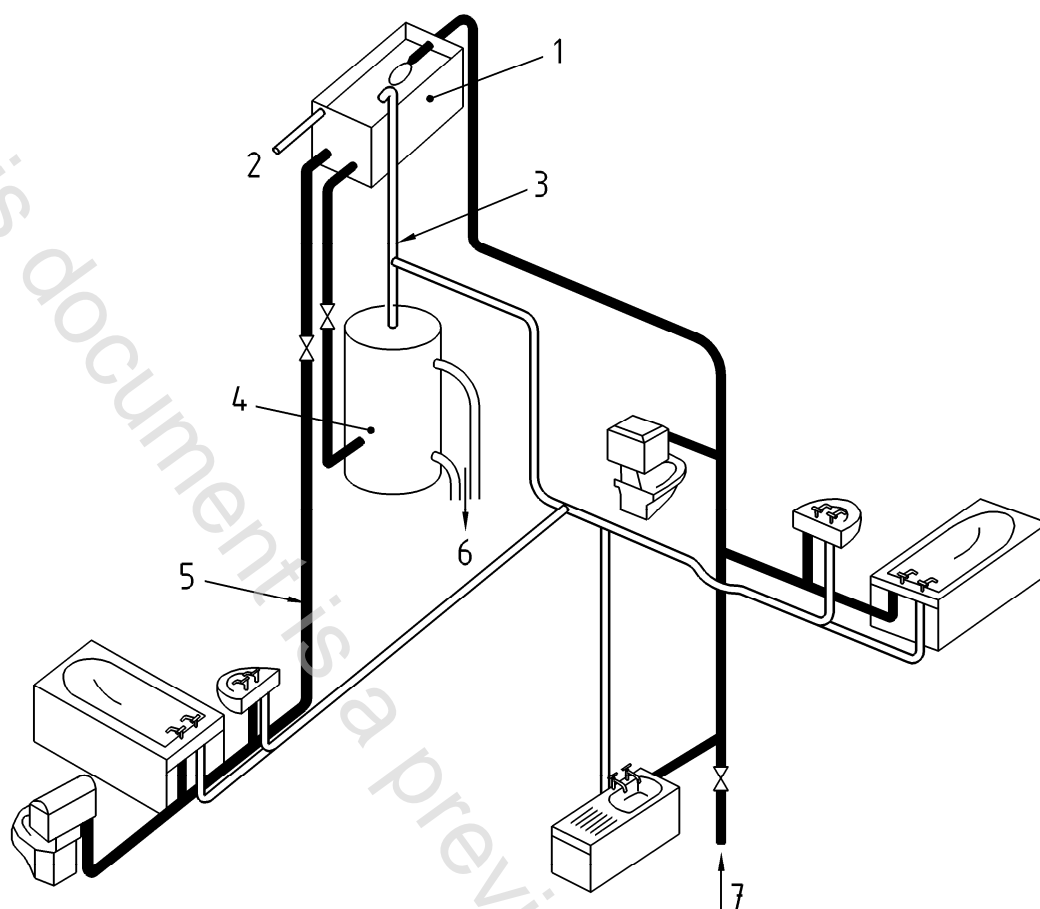

Key

- 1 Cold water storage cistern (cover omitted for clarity)
- 2 Warning pipe
- 3 Vent pipe
- 4 Hot water cylinder
- 5 Alternative cistern fed cold supply to sanitary appliances
- 6 To boiler
- 7 Mains supply pipe (Supply pressures up to 10 bar)

Figure 2 — Type 2 - Supply system with a pressure range of (0,01 to 1,0) MPa [(0,1 to 10) bar].

A vented domestic hot water and cold water supply system incorporating gravity hot water, mains cold water and alternative gravity cold water supply to sanitary appliances.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 31, *Pedestal wash basins - Connecting dimensions*

EN 32, *Wall-hung wash basins - Connecting dimensions*

EN 35, *Pedestal bidets with over-rim supply — Connecting dimensions*

EN 36, *Wall-hung bidets with overrim supply — Connecting dimensions*

EN 111, *Wall-hung hand rinse basins — Connecting dimensions*

EN 246, *Sanitary tapware — General specifications for flow rate regulators*

EN 248, *Sanitary tapware — General specification for electrodeposited coatings of Ni-Cr*

EN 695, *Kitchen sinks — Connecting dimensions*

EN 1717, *Protection against pollution of potable water in water installations and general requirements of devices to prevent pollution by backflow*

EN 12541:2002, *Sanitary tapware — Pressure flushing valves and automatic closing urinal valves PN 10*

EN 13407:2006, *Wall-hung urinals — Functional requirements and test methods*

prEN 13618, *Hose assembly - Flexible hose assembly*

EN 13959, *Anti-pollution check valves — DN 6 to DN 250 inclusive family E, type A, B, C and D*

EN 60335-1, *Household and similar electrical appliances — Safety — Part 1: General requirements (IEC 60335-1:2001, modified)*

EN 60529, *Degrees of protection provided by enclosures (IP code) (IEC 60529:1989)*

EN 60730-2-8, *Automatic electrical controls for household and similar use — Part 2-8: Particular requirements for electrically operated water valves, including mechanical requirements (IEC 60730-2- 8:2000, modified)*

EN 61000-6-1, *Electromagnetic compatibility (EMC) — Part 6-1: Generic standards — Immunity for residential, commercial and light-industrial environments (IEC 61000-6-1:2005)*

EN 61000-6-3, *Electromagnetic compatibility (EMC) — Part 6-3: Generic standards — Emission standard for residential, commercial and light-industrial environments (IEC 61000-6-3:1996, modified).*

EN ISO 228-1, *Pipe threads where pressure-tight joints are not made on the threads - Part 1: Dimensions, tolerances and designation (ISO 228-1:2000)*

EN ISO 5167-1, *Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full - Part 1: General principles and requirements (ISO 5167-1:2003)*

EN ISO 3822-1, *Acoustics - Laboratory tests on noise emission from appliances and equipment used in water supply installations - Part 1: Method of measurement (ISO 3822-1:1999)*

EN ISO 3822-2, *Acoustics - Laboratory tests on noise emission from appliances and equipment used in water supply installations - Part 2: Mounting and operating conditions for draw-off taps and mixing valves (ISO 3822-2:1995)*

EN ISO 3822-3, *Acoustics - Laboratory tests on noise emission from appliances and equipment used in water supply installations - Part 3: Mounting and operating conditions for in-line valves and appliances (ISO 3822-3:1997)*

EN ISO 3822-4:1997, *Acoustics - Laboratory tests on noise emission from appliances and equipment used in water supply installations - Part 4: Mounting and operating conditions for special appliances (ISO 3822-4:1985)*