
**Glass packaging — 26 H 126 crown
finish — Dimensions**

Emballages en verre — Bague couronne 26 H 126 — Dimensions



This document is a preview generated by EMS



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Dimensions.....	1
Bibliography.....	5

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 63, *Glass containers*.

Introduction

This International Standard is based on CE.T.I.E. (International Technical Centre for Bottling and Related Packaging) data sheet GME 13.02 Revision 1 (2007).

Efficient packaging is of great importance for the distribution and the protection of goods. Insufficient or inappropriate packaging can lead to damage or wastage of the contents of the pack.

This International Standard is identical to EN 14635:2010.

Glass packaging — 26 H 126 crown finish — Dimensions

1 Scope

This International standard specifies the dimensions of the 26 mm shallow crown finish for glass bottles containing beverages. The shallow crown finish is designed to use a metal crown closure (see CE.T.I.E. data sheet EC1-02 revision 1).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9058, *Glass containers — Standard tolerances for bottles*


3 Dimensions

The design and dimensions of the finish shall be as shown in [Figure 1](#) to [Figure 5](#).

Details which are not specified shall be selected in accordance with the application.

For general tolerances, ISO 9058 shall apply.

Dimensions in millimetres

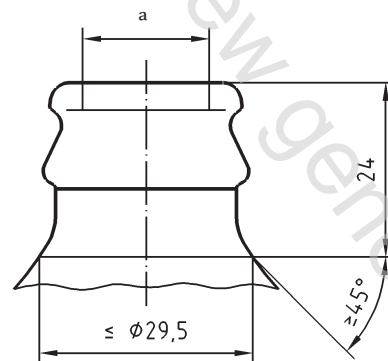

Key

^a \varnothing between 18,5 max and 17 min measured at 3 mm max down from the top.

Figure 1 — Shoulder and bore dimensions

Construction limit: Certain capping equipment may place further dimensional limits on the neck contour.