

**Test methods for wood preservatives;
Laboratory method for determining the
protective effectiveness of a
preservative treatment against blue
stain in service; Part 2 : Application by
methods other than brushing**

Test methods for wood preservatives; Laboratory method for determining the protective effectiveness of a preservative treatment against blue stain in service; Part 2 : Application by methods other than brushing

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

<p>Käesolev Eesti standard EVS-EN 152-2:2003 sisaldab Euroopa standardi EN 152-2:1988 + AC:1989 ingliskeelset teksti.</p> <p>Käesolev dokument on jõustatud 06.06.2003 ja selle kohta on avaldatud teade Eesti standardiorganisatsiooni ametlikus väljaandes.</p> <p>Standard on kättesaadav Eesti standardiorganisatsioonist.</p>	<p>This Estonian standard EVS-EN 152-2:2003 consists of the English text of the European standard EN 152-2:1988 + AC:1989.</p> <p>This document is endorsed on 06.06.2003 with the notification being published in the official publication of the Estonian national standardisation organisation.</p> <p>The standard is available from Estonian standardisation organisation.</p>
--	---

<p>Käsitlusala:</p> <p>This European Standard lays down a method for determining the effectiveness of water-borne and oil-solvent type wood preventive applied by methods other than brushing in preventing blue stain fungi in wood in service. This method is applicable to preservatives applied by immersion processes, soaking, double vacuum or vacuum pressure techniques. It is also applicable where a primer paint is used in conjunction with the preservative system (2)</p>	<p>Scope:</p> <p>This European Standard lays down a method for determining the effectiveness of water-borne and oil-solvent type wood preventive applied by methods other than brushing in preventing blue stain fungi in wood in service. This method is applicable to preservatives applied by immersion processes, soaking, double vacuum or vacuum pressure techniques. It is also applicable where a primer paint is used in conjunction with the preservative system (2)</p>
---	---

ICS 71.100.50

Võtmesõnad: effective- ness, fungi, laboratory tests, pest control, preventive, procedure, test results, wood preservatives

UDC 674.04 : 620.197 : 620.193.82

Descriptors: Wood, wood preservative, pest control, fungi, laboratory tests, effectiveness, procedure, test results.

English version

Test methods for wood preservatives

**Laboratory method for determining the protective
effectiveness of a preservative treatment against blue
stain in service⁺)**

Part 2: Application by methods other than brushing

Méthodes d'essai pour les produits de
préservation du bois; méthode de labora-
toire pour déterminer l'efficacité préventive
d'un traitement de protection du bois
ouvré contre le bleuissement fongique.
Partie 2: Application par méthodes autres
que le brossage

Prüfverfahren für Holzschutzmittel;
Laboratoriumsverfahren zur Bestimmung
der vorbeugenden Wirksamkeit einer
Schutzbehandlung von verarbeitetem Holz
gegen Bläuepilze. Teil 2: Anwendung
durch andere Verfahren als Streichen

This European Standard was approved by CEN on 1987-03-26.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Brief history

This European Standard was drawn up by the Technical Committee CEN/TC 38 'Methods of test for wood preservatives', the Secretariat of which is held by AFNOR.

In accordance with the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard:

Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

Contents

	Page
0 Introduction	3
1 Scope	3
2 Field of application	3
Figure 1: Designation of different types of preservatives for preventing blue stain in service	3
3 Principle	4
4 Materials	4
5 Sample of wood preservative	5
6 Wood specimens	5
7 Test method	6
8 Reporting the results	8
9 Test report	8
Annex A Glossary	9
Annex B Preparation of a spore suspension of the test fungi	9
Annex C Detailed information on chemicals	10
Annex D Information regarding sterilization procedures	11
Annex E Figure 2: Culture vessel	12
Figure 3: Diagram of the mounting of weathering blocks in the weathering racks	13
Figure 4: Rack for drying treatment sticks	13
Figure 5: Preparation of twin panel assemblies	14
Figure 6: Preparation of weathering block	14
Figure 7: Treated test panel prepared from weathering block	14
Figure 8: Schematic presentation of twin panel assembly	15
Annex F Instructions on the test procedure	16
Annex G Example of a test report	17

0 Introduction

The test method described in this European Standard is a laboratory method combined with natural weathering, which provides a basis for assessment of the effectiveness of a wood preservative in preventing the development of blue stain fungi in wood in service where disfigurement¹⁾ may be considered important, such as external decorative timber and joinery. The method permits the determination of the effectiveness of undiluted preservatives applied to the wood by specified methods other than superficial treatments²⁾ such as brushing¹⁾.

The method may also be used to test preparations in which the proportions of the individual components have been varied so as to establish, for the active ingredients, the limit of their effectiveness.

The method is only suitable for testing preparations which are intended to prevent the occurrence of blue staining fungi in wood in service. It is not suitable for assessing the temporary preventive effectiveness of anti-stain preservatives on roundwood or on freshly cut wood. The method does not permit determination of the fungicidal properties of the surface coating applied to the wood after the priming coat.

It should be used to assess the degree of protection, taking into account the method of application in question and, in particular, the manufacturer's specifications²⁾. It is recommended that the result of these tests should be supplemented by further suitable tests and especially by practical experience.

1 Scope

This European Standard lays down a method for determining the effectiveness of water-borne and oil-borne wood preservatives applied by methods other than brushing in preventing the development of blue stain fungi on wood in service. This method is applicable to preserva-

tives applied by immersion, soaking, double vacuum or vacuum/pressure techniques. It is also applicable where a primer paint is used in conjunction with the preservative system²⁾.

2 Field of application

This method is applicable to the following types of preparations applied by methods other than brushing or similar superficial treatment, resulting in an equivalent retention of preservative (see figure 1):

- A - fungicidal preparations, with or without pigment, used in conjunction with unspecified varnishes or paint coatings,
- B - fungicidal preparations, with or without pigment, used in conjunction with specified varnishes or paint coatings,
- C - fungicidal preparations, with or without pigment, used without subsequent varnish or paint coatings.

It is also possible to test the effectiveness of a combined protective system which involves the application of one preparation by one of the non-brushing techniques prescribed here, followed by a subsequent application of a different preparation by the brushing procedures prescribed in Part 1.

¹⁾ Part 1 of this standard lays down a method for determining the effectiveness of a wood preservative applied against blue stain by brushing.

²⁾ The method may also be used in conjunction with primer paints required to give protection during storage of components on site. These are to be applied as specified coatings as defined for preparations of type B.

Type of preparation

Pigment

Application of subsequent coating

Type of subsequent coating

Type of product (clause 2)

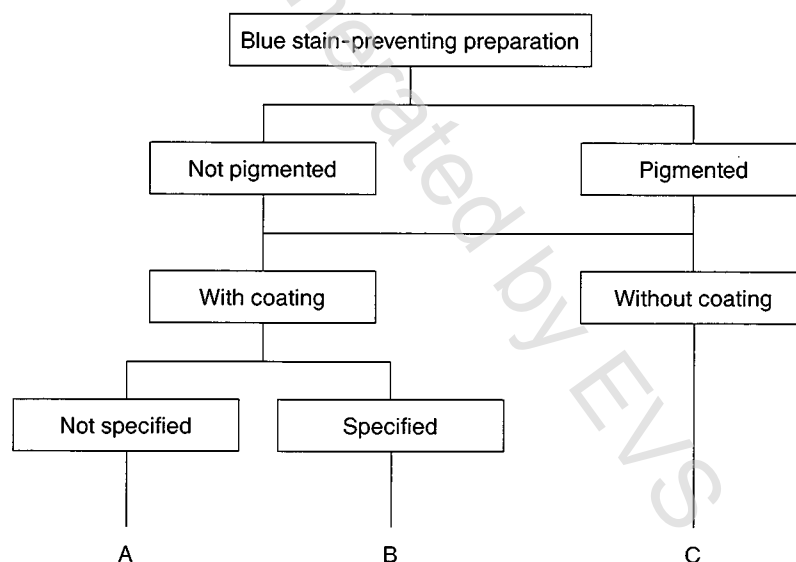


Figure 1: Designation of different types of preparation for preventing blue stain in service