

TECHNICAL SPECIFICATION

Hybrid insulators for a.c. and d.c. high-voltage applications – Definitions, test methods and acceptance criteria



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2015 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

PDF GENERATED BY EVS

TECHNICAL SPECIFICATION

Hybrid insulators for a.c. and d.c. high-voltage applications – Definitions, test methods and acceptance criteria

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.080.10

ISBN 978-2-8322-3017-6

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references.....	6
3 Definitions.....	7
4 Identification.....	9
5 Environmental conditions.....	9
6 Tolerances.....	9
7 Classification of tests.....	10
7.1 Design tests.....	10
7.2 Type tests.....	10
7.3 Sample tests.....	11
7.4 Routine tests.....	11
8 Design tests.....	12
8.1 General.....	12
8.2 Tests on interfaces and connections of end fittings.....	13
8.2.1 General.....	13
8.2.2 Pre-stressing.....	13
8.2.3 Verification tests.....	14
8.3 Tests on Shed and Housing Material.....	14
8.3.1 Hardness test.....	14
8.3.2 Accelerated weathering test.....	14
8.3.3 Tracking and erosion test.....	15
8.3.4 Flammability test.....	15
9 Type tests.....	15
9.1 General.....	15
9.2 Electrical tests.....	15
9.3 Mechanical tests.....	15
10 Sample tests.....	15
11 Routine tests.....	15
Annex A (informative) Comparison between hybrid insulators and glass fibre cored polymeric housing and porcelain insulators.....	16
A.1 History.....	16
A.2 Comparison between porcelain and pultruded GFRP rod.....	16
A.3 Advantages of hybrid insulators over conventional porcelain insulators.....	16
A.4 Advantages of hybrid insulators over glass fibre cored insulators.....	17
A.5 Problems shared with polymeric insulators.....	17
A.6 Transport, storage and installation.....	17
Bibliography.....	18
Figure 1 – Thermal cycle test.....	14
Table 1 – Required tests.....	12
Table 2 – Design tests.....	13

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**HYBRID INSULATORS FOR A.C. AND D.C. HIGH-VOLTAGE
APPLICATIONS – DEFINITIONS, TEST METHODS
AND ACCEPTANCE CRITERIA**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. In exceptional circumstances, a technical committee may propose the publication of a technical specification when

- the required support cannot be obtained for the publication of an International Standard, despite repeated efforts, or
- the subject is still under technical development or where, for any other reason, there is the future but no immediate possibility of an agreement on an International Standard.

Technical specifications are subject to review within three years of publication to decide whether they can be transformed into International Standards.

IEC TS 62896, which is a technical specification, has been prepared by IEC technical committee 36: Insulators.

The text of this technical specification is based on the following documents:

Enquiry draft	Report on voting
36/362/DTS	36/368/RVC

Full information on the voting for the approval of this technical specification can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- transformed into an International standard,
- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

INTRODUCTION

Hybrid insulators consist of an insulating core, bearing the mechanical load protected by a polymeric housing, the load being transmitted to the core by end fittings. Despite these common features, the materials used and the construction details employed by different manufacturers may be quite different. The core is made of ceramic or glass material.

Hybrid insulators are applied as overhead line, post or hollow core equipment insulators. In order to perform the design tests, IEC 62217 shall be applied for the polymeric housing and the interfaces between core and the housing. For the core, the test standards for the respective ceramic product (IEC 60168, IEC 60383 and IEC 62155) shall be applied.

Some tests have been grouped together as "design tests", to be performed only once on insulators which satisfy the same design conditions. For all design tests of hybrid insulators, the common clauses defined in IEC 62217 are applied. As far as practical, the influence of time on the electrical and mechanical properties of the components (core material, housing, interfaces etc.) and of the complete hybrid insulators has been considered in specifying the design tests to ensure a satisfactory life-time under normally known stress conditions in service.

Polymeric housing materials that show the hydrophobicity transfer mechanism (HTM) are preferred for hybrid insulators. They are applied as a countermeasure against severe polluted service conditions. For the time being, no ageing or pollution tests have been developed for the verification of this property, but CIGRE Technical Brochure No. 442 is available for the evaluation of the retention of the hydrophobicity and the HTM of polymeric housing materials.

Artificial pollution tests for insulators with polymeric housings under AC and DC voltage stress are presently under development by CIGRE.

HYBRID INSULATORS FOR A.C. AND D.C. HIGH-VOLTAGE APPLICATIONS – DEFINITIONS, TEST METHODS AND ACCEPTANCE CRITERIA

1 Scope

This technical specification applies to hybrid insulators for a.c. and d.c. applications consisting of a load-bearing insulating solid or hollow core consisting of ceramic or glass, a housing (defined geometry, outside the insulating core) made of polymeric material and end fittings permanently attached to the insulating core.

Hybrid insulators covered by this technical specification are intended for use as suspension/tension line insulators, line post insulators, station post insulators and hollow core insulators for apparatus.

The object of this technical specification is to:

- define the terms used;
- prescribe test methods;
- prescribe acceptance criteria.

Silicone or other functional coatings (CIGRE Technical Brochure No. 478, Appendix B), booster sheds, shed extenders and rain deflectors are not within the scope of this technical specification.

This technical specification does not include requirements dealing with the choice of insulators for specific operating conditions.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-471:2007, *International Electrotechnical Vocabulary – Part 471: Insulators*

IEC 60168, *Tests on indoor and outdoor post insulators of ceramic material or glass for systems with nominal voltages greater than 1000 V*

IEC 60383-1, *Insulators for overhead lines with a nominal voltage above 1000 V – Part 1: Ceramic or glass insulator units for a.c. systems – Definitions, test methods and acceptance criteria*

IEC 60383-2, *Insulators for overhead lines with a nominal voltage above 1000 V – Part 2: Insulator strings and insulator sets for a.c. systems – Definitions, test methods and acceptance criteria*

IEC 62155, *Hollow pressurized and unpressurized ceramic and glass insulators for use in electrical equipment with rated voltages greater than 1 000 V*

IEC 62217, *Polymeric HV insulators for indoor and outdoor use – General definitions, test methods and acceptance criteria*

3 Definitions

For the purpose of this document the terms and definitions given in IEC 60050-471 and the following apply (some definitions from IEC 62217 are reproduced here for ease of reference).

3.1

high voltage HV

voltage over 1 000 V a.c. or over 1 500 V d.c. or over 1 500 V peak value

3.2

polymeric insulator

insulator whose insulating body consists of only polymer containing materials, to the ends of which coupling devices may be attached

Note 1 to entry: Polymeric insulators are also known as non-ceramic insulators.

3.2.1

resin insulator

polymeric insulator whose insulating body consists of a solid shank and sheds protruding from the shank made from only one organic based housing material (e.g. cycloaliphatic epoxy)

3.2.2

composite insulator


polymeric insulator made of at least two polymeric insulating parts, namely a core and a housing, equipped with metal fittings

Note 1 to entry: Composite insulators, for example, can consist either of individual sheds mounted on the core, with or without an intermediate sheath, or alternatively, of a housing directly moulded or cast in one or several pieces on to the core.

3.3

hybrid insulator

insulator that consists of a ceramic or glass core and a polymeric housing, equipped with one or more metal fittings

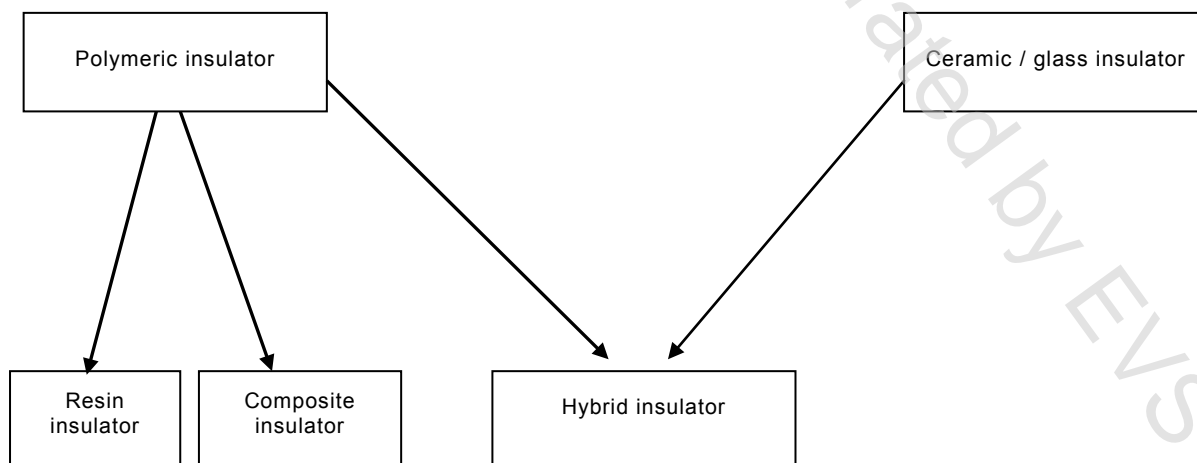

IEC

Note 1 to entry: The mechanical functions are mainly characterised by the core, the electrical functions are mainly characterised by the polymeric housing. The housing may cover the core completely or partly. In the latter case the exposed portions of the ceramic core are usually covered by glaze.