

ISO

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

ISO RECOMMENDATION R 686

35 mm FILMSTRIPS

DIMENSIONS AND FORMATS

1st EDITION
March 1968

COPYRIGHT RESERVED

The copyright of ISO Recommendations and ISO Standards belongs to ISO Member Bodies. Reproduction of these documents, in any country, may be authorized therefore only by the national standards organization of that country, being a member of ISO.

For each individual country the only valid standard is the national standard of that country.

Printed in Switzerland

Also issued in French and Russian. Copies to be obtained through the national standards organizations.

This document is a preview generated by EVS

BRIEF HISTORY

The ISO Recommendation R 686, *35 mm Filmstrips – Dimensions and formats*, was drawn up by Technical Committee ISO/TC 42, *Photography*, the Secretariat of which is held by the United States of America Standards Institute (USASI).

Work on this question by the Technical Committee began in 1961 and led, in 1965, to the adoption of a Draft ISO Recommendation.

In September 1965, this Draft ISO Recommendation (No. 878) was circulated to all the ISO Member Bodies for enquiry. It was approved, subject to a few modifications of an editorial nature, by the following Member Bodies :

Argentina	Israel	Switzerland
Australia	Italy	United Kingdom
Belgium	Japan	U.S.A.
Canada	Poland	
Czechoslovakia	South Africa,	
France	Rep. of	
Germany	Sweden	

One Member Body opposed the approval of the Draft :

U.S.S.R.

The Draft ISO Recommendation was then submitted by correspondence to the ISO Council which decided, in March 1968, to accept it as an ISO RECOMMENDATION

35 mm FILMSTRIPS

DIMENSIONS AND FORMATS

1. SCOPE

This ISO Recommendation defines dimensions, general layout and material for 35 mm perforated filmstrips carrying transparent pictures for filmstrip projection. It does not cover details regarding mask opening of the filmstrip projector.

2. DESIGN OF FILMSTRIP

2.1 Width and perforation

The width and perforation of the filmstrip should meet the dimensional requirements specified for perforation Types 1, 2 and 3 of ISO Recommendation R 491, *Cutting and perforating dimensions for 35 mm motion-picture raw stock film*.

2.2 Leader and trailer

Preceding the text of the title and following the end of the text, the filmstrip should be provided with a leader and a trailer with a minimum length of 200 mm (8 in) (see Fig. 1).

2.3 Length

It is recommended that the length of the filmstrip be not more than 3.2 m (126 in), approximately 73 pictures with frame size 24 mm X 36 mm (see Fig. 1).

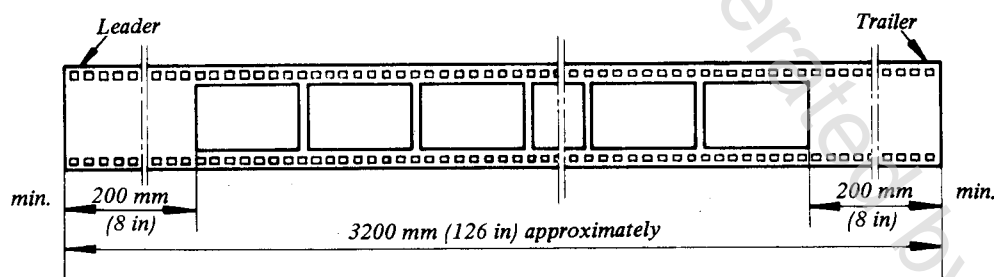


FIG. 1 – 35 mm perforated film

2.4 Material

Safety films should be used, and should be in accordance with ISO Recommendation R 543, *Definition and marking of safety film for motion-picture uses*.