
**Road vehicles — Local Interconnect
Network (LIN) —**

**Part 2:
Transport protocol and network layer
services**

Véhicules routiers — Réseau Internet local (LIN) —

Partie 2: Protocole de transport et couches de services réseau

This document is a preview generated by EBS



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	2
3 Terms, definitions, symbols and abbreviated terms	2
3.1 Terms and definitions	2
3.2 Symbols	4
3.3 Abbreviated terms	4
4 Conventions	5
5 Network management	5
5.1 Network management general information	5
5.2 LIN node communication state diagram	5
5.3 Wake up	6
5.3.1 Wake up general information	6
5.3.2 Master generated wake up	6
5.3.3 Slave generated wake up	6
5.4 Go-to-sleep	8
6 Network layer overview	8
6.1 General	8
6.2 Format description of network layer services	9
6.3 Internal operation of network layer	9
6.4 Service data unit specification	10
6.4.1 N_AI, address information	10
6.4.2 <Length>	11
6.4.3 <MessageData>	11
6.4.4 <N_Result>	11
6.5 Services provided by network layer to higher layers	12
6.5.1 Specification of network layer service primitives	12
6.5.2 N_USData.request	13
6.5.3 N_USData.confirm	13
6.5.4 N_USData_FF.indication	13
6.5.5 N_USData.indication	13
7 Transport layer protocol	14
7.1 Protocol functions	14
7.2 Single frame transmission	14
7.3 Multiple frame transmission	14
7.4 Transport layer protocol data units	16
7.4.1 Protocol data unit types	16
7.4.2 SF N_PDU	16
7.4.3 FF N_PDU	16
7.4.4 CF N_PDU	16
7.4.5 Protocol data unit field description	16
7.5 Protocol control information specification	17
7.5.1 N_PCI	17
7.5.2 SingleFrame N_PCI parameter definition	18
7.5.3 FirstFrame N_PCI parameter definition	19
7.5.4 ConsecutiveFrame N_PCI parameter definition	19
7.6 Network layer timing	20
7.6.1 Timing constraints	20
7.6.2 Network layer timeouts	25
7.6.3 Network layer error handling	25
7.6.4 Unexpected arrival of N_PDU	26

8	Data link layer usage	27
8.1	Data link layer service parameters	28
8.2	Data link layer interface services	28
8.2.1	L_Data.request	28
8.2.2	L_Data.confirm	28
8.2.3	L_Data.indication	28
8.3	Mapping of the N_PDU fields	28
8.4	Transport layer PDU structure and communication	29
8.4.1	PDU structure	29
8.4.2	Communication	31
9	Diagnostic communication requirements	31
9.1	Definition of diagnostic classes	31
9.1.1	General	31
9.1.2	Diagnostic class I	31
9.1.3	Diagnostic class II	31
9.1.4	Diagnostic class III	31
9.1.5	Summary of slave node diagnostic classes	32
9.2	Diagnostic messages	32
9.3	Using the transport layer	32
9.4	Slave node diagnostic timing requirements	34
9.5	Response pending	36
9.6	Transport protocol handling in LIN master	36
9.6.1	General	36
9.6.2	Diagnostic master request schedule	36
9.6.3	Diagnostic slave response schedule	37
9.6.4	Diagnostic schedule execution	37
9.7	Transmission handler requirements	42
9.7.1	General	42
9.7.2	Master node transmission handler	42
9.7.3	Slave node transmission handler	46
9.8	Diagnostic service prioritization	48
10	LIN node capability language (NCL)	48
10.1	General	48
10.2	Plug and play workflow concept	49
10.2.1	General	49
10.2.2	LIN node generation	50
10.2.3	LIN cluster design	50
10.2.4	Debugging	51
11	Node capability file (NCF)	51
11.1	Overview of NCF syntax	51
11.2	Global structure definition	51
11.2.1	Node capability file marker	51
11.2.2	Language version number definition	52
11.2.3	NCF revision	52
11.2.4	Big-endian signal encoding variant	52
11.3	Node definition	52
11.3.1	General node definition	52
11.3.2	Diagnostic definition	53
11.3.3	Frame definition	54
11.3.4	Signal encoding type definition	55
11.3.5	Status management	56
11.3.6	Free text definition	56
11.4	NCF example	56
12	LIN description file (LDF)	57
12.1	General	57
12.2	Overview of LDF syntax	57

12.3	LDF definition.....	58
12.3.1	Global structure definition.....	58
12.3.2	Signal definition.....	59
12.3.3	Frame definition.....	60
12.3.4	Node definition.....	62
12.3.5	Schedule table definition.....	65
12.3.6	Signal encoding type definition.....	67
12.3.7	Signal representation definition.....	69
12.4	LDF example.....	69
Bibliography.....		72

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 22, *Road vehicles*, SC 31, *Data communication*.

A list of all parts in the ISO 17987 series can be found on the ISO website.

Introduction

This ISO 17987 (all parts) specifies the use cases, the communication protocol and physical layer requirements of an in-vehicle communication network called Local Interconnect Network (LIN).

The LIN protocol as proposed is an automotive focused low speed universal asynchronous receiver transmitter (UART) based network. Some of the key characteristics of the LIN protocol are signal based communication, schedule table based frame transfer, master/slave communication with error detection, node configuration and diagnostic service transportation.

The LIN protocol is for low cost automotive control applications, for example, door module and air condition systems. It serves as a communication infrastructure for low-speed control applications in vehicles by providing:

- signal based communication to exchange information between applications in different nodes;
- bitrate support from 1 kbit/s to 20 kbit/s;
- deterministic schedule table based frame communication;
- network management that wakes up and puts the LIN cluster into sleep mode in a controlled manner;
- status management that provides error handling and error signalling;
- transport layer that allows large amount of data to be transported (such as diagnostic services);
- specification of how to handle diagnostic services;
- electrical physical layer specifications;
- node description language describing properties of slave nodes;
- network description file describing behaviour of communication;
- application programmer's interface.

ISO 17987 (all parts) is based on the open systems interconnection (OSI) basic reference model as specified in ISO/IEC 7498-1 which structures communication systems into seven layers.

The OSI model structures data communication into seven layers called (top down) *application layer* (layer 7), *presentation layer*, *session layer*, *transport layer*, *network layer*, *data link layer* and *physical layer* (layer 1). A subset of these layers is used in ISO 17987 (all parts).

ISO 17987 (all parts) distinguishes between the services provided by a layer to the layer above it and the protocol used by the layer to send a message between the peer entities of that layer. The reason for this distinction is to make the services, especially the application layer services and the transport layer services, reusable also for other types of networks than LIN. In this way, the protocol is hidden from the service user and it is possible to change the protocol if special system requirements demand it.

ISO 17987 (all parts) provides all documents and references required to support the implementation of the requirements related to the following.

- ISO 17987-1: This part provides an overview of the ISO 17987 (all parts) and structure along with the use case definitions and a common set of resources (definitions, references) for use by all subsequent parts.
- ISO 17987-2: This part specifies the requirements related to the transport protocol and the network layer requirements to transport the PDU of a message between LIN nodes.
- ISO 17987-3: This part specifies the requirements for implementations of the LIN protocol on the logical level of abstraction. Hardware related properties are hidden in the defined constraints.

- ISO 17987-4: This part specifies the requirements for implementations of active hardware components which are necessary to interconnect the protocol implementation.
- ISO/TR 17987-5: This part specifies the LIN application programmers interface (API) and the node configuration and identification services. The node configuration and identification services are specified in the API and define how a slave node is configured and how a slave node uses the identification service.
- ISO 17987-6: This part specifies tests to check the conformance of the LIN protocol implementation according to ISO 17987-2 and ISO 17987-3. This comprises tests for the data link layer, the network layer and the transport layer.
- ISO 17987-7: This part specifies tests to check the conformance of the LIN electrical physical layer implementation (logical level of abstraction) according to ISO 17987-4.

Road vehicles — Local Interconnect Network (LIN) —

Part 2:

Transport protocol and network layer services

1 Scope

This document specifies a transport protocol and network layer services tailored to meet the requirements of LIN-based vehicle network systems on local interconnect networks. The protocol specifies an unconfirmed communication.

The LIN protocol supports the standardized service primitive interface as specified in ISO 14229-2.

This document provides the transport protocol and network layer services to support different application layer implementations like

- normal communication messages, and
- diagnostic communication messages.

The transport layer defines transportation of data that is contained in one or more frames. The transport layer messages are transported by diagnostic frames. A standardized API is specified for the transport layer.

Use of the transport layer is targeting systems where diagnostics are performed on the backbone bus (e.g. CAN) and where the system builder wants to use the same diagnostic capabilities on the LIN sub-bus clusters. The messages are in fact identical to the ISO 15765-2 and the PDUs carrying the messages are very similar.

The goals of the transport layer are

- low load on LIN master node,
- to provide full (or a subset thereof) diagnostics directly on the LIN slave nodes, and
- targeting clusters built with powerful LIN nodes (not the mainstream low cost).

A typical system configuration is shown in [Figure 1](#).

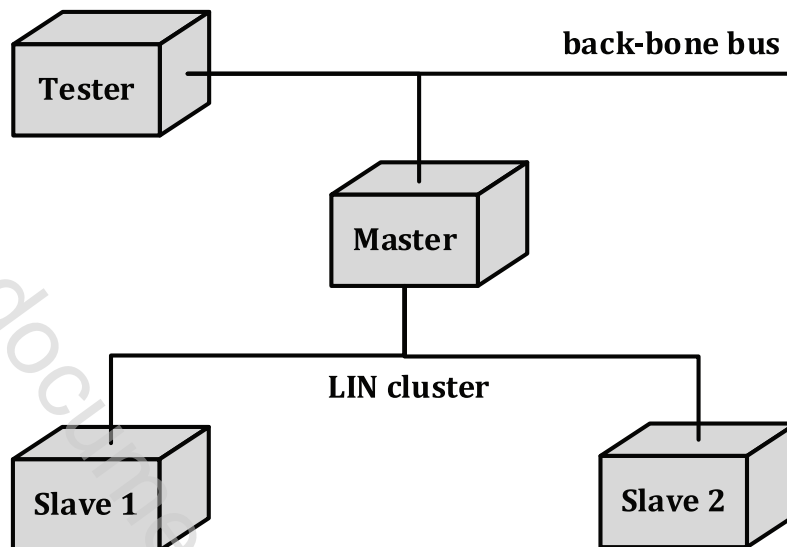


Figure 1 — Typical system setup for a LIN cluster using the transport layer

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14229-1, *Road vehicles — Unified diagnostic services (UDS) — Part 1: Specification and requirements*

ISO 14229-2, *Road vehicles — Unified diagnostic services (UDS) — Part 2: Session layer services*

ISO 14229-7:2015, *Road vehicles — Unified diagnostic services (UDS) — Part 7: UDS on local interconnect network (UDSonLIN)*

ISO 17987-3:2016, *Road vehicles — Local Interconnect Network (LIN) — Part 3: Protocol specification*

3 Terms, definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 7498-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

broadcast NAD

slave node receiving a message with a NAD equal to the broadcast NAD 7F₁₆ the message is received and processed