INTERNATIONAL STANDARD

ISO 10579

Second edition 2010-03-01

Geometrical product specifications (GPS) — Dimensioning and tolerancing — Non-rigid parts

Spécification géométrique des produits (GPS) — Cotation et tolérancement — Pièces non rigides




PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

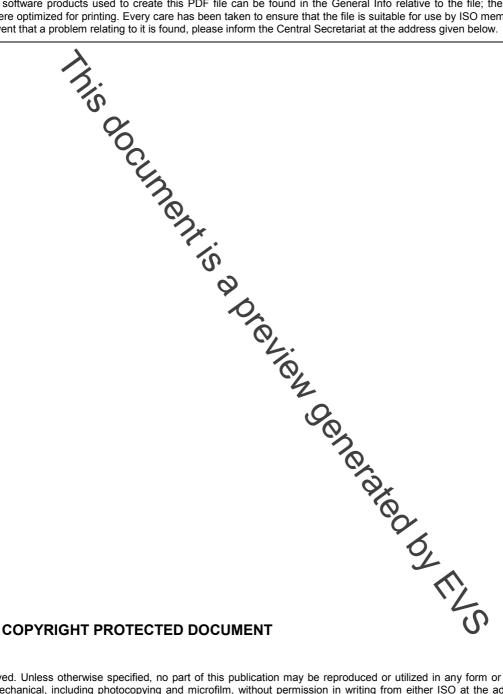

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10579 was prepared by Technical Committee ISO/TC 213, Dimensional and geometrical product specifications and verification.

This second edition cancels and replaces the first edition (ISO 10579:1993), which has been technically revised.

iii

Introduction

This International Standard is a geometrical product specification (GPS) standard and is to be regarded as a global GPS standard (see ISO/TR 14638)[4]. It influences chain links 1, 2 and 3 of the chain of standards on form of line independent of datum, form of line dependent on datum, form of surface independent of datum, form of surface dependent on datum, orientation, location, circular run-out and total run-out in the general GPS matrix.

For more detailed information on the relation of this standard to other standards and the GPS matrix model, see Annex B.

in peed limits
ufacturing processes parts are defined as "ricularly within the indicated tolerance epending on the design function and the ddition to, assessing the part conventionally to part when subject to restraint that is no greater than the parts in this category include both those of inherently rigid macinherently flexible material (such as rubber, plastics, etc.)

We have a subject to restraint that is no greater than the parts in this category include both those of inherently rigid macinherently flexible material (such as rubber, plastics, etc.) Certain parts, when removed wan their manufacturing environment, may deform significantly from their eight, flexibility or the release of internal stresses resulting from the defined limits owing to their w

These parts are defined as "non-rigid parts" and the deformation is acceptable provided that the parts may be brought within the indicated tolerance by applying reasonable force to facilitate inspection and assembly.

Depending on the design function and the part's interface with its mating components, instead of, or in addition to, assessing the part conventionally in its free state condition), it may be necessary to assess the

Parts in this category include both those of inherently rigid material (such as thin metal parts) and those of

Geometrical product specifications (GPS) — Dimensioning and tolerancing — Non-rigid parts

1 Scope

This International Standard gives rules for dimensioning and tolerancing non-rigid parts where restraining of features is required during verification of dimensions and tolerances specified on a drawing.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1101:2004, Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out

3 Terms and definitions

For the purposes of this document, the following terrisand definitions apply.

3.1

non-rigid part

part which deforms to an extent that in the free state is beyond the dimensional and/or geometrical tolerances on the drawing

3.2

free state

condition of a part subjected only to the force of gravity

4 Basic principles

The distortion of a non-rigid part must not exceed that which allows the part to be brought within specified tolerances for verification and positioning at assembly, or assembled, by applying pressure or forces not exceeding those which can be expected under normal assembly conditions. It is impossible to avoid the effect of natural forces such as gravity, but the extent of distortion may depend upon the orientation of the part and condition of the part in the free state. If it is necessary to indicate the tolerance in the free state, the conditions under which the tolerance is to be achieved (i.e. the direction of gravity, conditions in which it is to be supported, etc.) may have to be indicated in a note, as shown in Annex A. For non-rigid parts, identified on the drawing by the added statement "ISO 10579-NR", the restrained condition applies unless the dimensions and tolerances are qualified by the symbol \bigcirc , see Clause 5.

© ISO 2010 – All rights reserved