

**Fibre organisers and closures to be used in optical fibre communication systems - Product specifications - Part 3-6: Multimode mechanical fibre splice for use in an outdoor protected environment (Cat U)**

## EESTI STANDARDI EESSÕNA

## NATIONAL FOREWORD

See Eesti standard EVS-EN 50411-3-6:2013 sisaldab Euroopa standardi EN 50411-3-6:2013 ingliskeelset teksti.	This Estonian standard EVS-EN 50411-3-6:2013 consists of the English text of the European standard EN 50411-3-6:2013.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas.	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation.
Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 01.03.2013.	Date of Availability of the European standard is 01.03.2013.
Standard on kättesaadav Eesti Standardikeskusest.	The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile [standardiosakond@evs.ee](mailto:standardiosakond@evs.ee).

ICS 33.180.20

### Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:  
Aru 10, 10317 Tallinn, Eesti; [www.evs.ee](http://www.evs.ee); telefon 605 5050; e-post [info@evs.ee](mailto:info@evs.ee)

### The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:  
Aru 10, 10317 Tallinn, Estonia; [www.evs.ee](http://www.evs.ee); phone 605 5050; e-mail [info@evs.ee](mailto:info@evs.ee)

**Fibre organisers and closures to be used in optical fibre communication systems -  
Product specifications -  
Part 3-6: Multimode mechanical fibre splice for use in an outdoor protected environment (Cat U)**

Organiseurs et boîtiers de fibres destinés à être utilisés dans les systèmes de communication par fibres optiques -  
Spécifications de produits -  
Partie 3-6: Epissure mécanique de fibres multimodales installée en environnement extérieur protégé (Cat U)

LWL-Spleißkassetten und -Muffen für die Anwendung in LWL Kommunikationssystemen -  
Produktnorm -  
Teil 3-6: Mechanische Spleiße von Mehrmoden-Faser für geschützte Freiluftanwendungen (Kategorie U)

This European Standard was approved by CENELEC on 2012-12-24. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Management Centre: Avenue Marnix 17, B - 1000 Brussels**

## Contents

<b>Foreword</b>	<b>3</b>
<b>1 Scope</b>	<b>5</b>
1.1 Product definition	5
1.2 Interoperability	5
1.3 Expected performance	5
1.4 Operating environment	5
1.5 Reliability	5
1.6 Quality assurance	5
<b>2 Normative references</b>	<b>5</b>
<b>3 Description</b>	<b>6</b>
3.1 General	6
3.2 Mechanical splice	7
3.3 Materials	7
3.4 Dimensions	7
3.5 Colour and marking	7
<b>4 Variants</b>	<b>8</b>
<b>5 Dimensional requirements</b>	<b>8</b>
<b>6 Tests</b>	<b>9</b>
6.1 Introduction	9
6.2 Test sample preparation	9
6.3 Test and measurement methods	9
6.4 Pass/fail criteria	9
<b>7 Test report</b>	<b>9</b>
<b>8 Performance requirements</b>	<b>9</b>
8.1 Dimensional and marking requirements	9
8.2 Assembly yield requirement	9
8.3 Optical performance requirements	10
<b>Annex A (normative) Fibre type</b>	<b>16</b>
<b>Annex B (normative) Sample size and product sourcing requirements</b>	<b>17</b>

## Figures

Figure 1 – Outline and maximum dimensions	8
---	---

## Tables

Table 1 – Optical fibre mechanical splice, for category U – variants	8
Table 2 – Test details and requirements	10
Table A.1 – Fibre type characteristics	16
Table B.1 – Sample size per test	17

## Foreword

This document (EN 50411-3-6:2013) has been prepared by CLC/TC 86BXA "Fibre optic interconnect, passive and connectorised components".

The following dates are fixed:

- latest date by which this document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2013-12-24
- latest date by which the national standards conflicting with this document have to be withdrawn (dow) 2015-12-24

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC [and/or CEN] shall not be held responsible for identifying any or all such patent rights.

**Fibre organisers and closures to be used in optical fibre communication systems –  
Product specifications**


**Part 3-6: Multimode mechanical fibre splice for use in an outdoor protected environment (Cat U)**

Description		Performance	
Type:	Fibre splice	Application:	EN 61753-1, Category U with extension of lower temperature to -40 °C
Style:	Mechanical		
Operating wavelength:	850 nm and 1 300 nm	Attenuation grades	≤ 0,25 dB maximum (97 %)
Fibre category	EN 60793-2-10 type A1a.1, A1a.2, A1a.3 and A1b	Return loss grades	≥ 20 dB

**Related documents:**

EN 60793-2-10	Optical fibres – Part 2-10: Product specifications – Sectional specification for category A1 multimode fibres (IEC 60793-2-10)
EN 60794-2-50	Optical fibre cables – Part 2-50: Indoor cables – Family specification for simplex and duplex cables for use in terminated cable assemblies (IEC 60794-2-50)
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)
EN 61753-1	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1)

**Outline and maximum dimensions:**

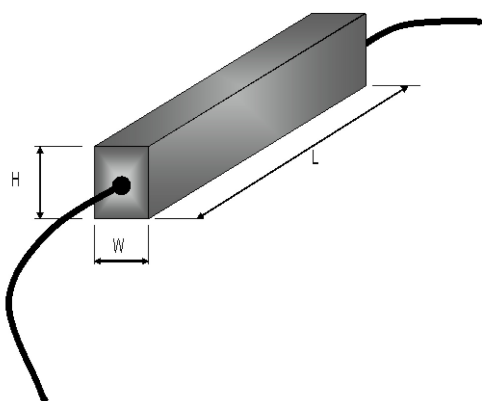

Variant	Dimension W mm	Dimension H mm	Dimension L mm
<b>Type M1</b>	3,8	6,4	38
<b>Type M2</b>	4,0	4,0	36
<b>Type M3</b>	3,2	3,2	45
<b>Type M4</b>	4,2	4,2	44
<b>Type M5</b>	4,0	4,0	40
<b>Type M6</b>	Ø 5,0		65

## 1 Scope

### 1.1 Product definition

This European Standard contains the initial, start of life dimensional, optical, mechanical and environmental performance requirements which a multimode mechanical splice will meet in order for it to be categorised as an EN standard product.

Since different variants and grades of performance are permitted, product marking and identification details are given in 3.5.

Although in this document the product is qualified for EN 60793-2-10 type A1a.1, A1a.2, A1a.3 and A1b multimode fibres, it may also be suitable for other fibre types.

### 1.2 Interoperability

The installed mechanical splice fits into a fibre management system with optical fibre splice cassettes or splice trays. This European Standard specifies the following two physical interface dimensions:

- cross sectional profile with width, height or diameter (in millimetres);
- length (in millimetres).

### 1.3 Expected performance

In this document, the performance of a mechanical splice is given with identical fibres only. Losses associated with fibre cladding diameter and mode field mismatch are not taken into account. The measured attenuation is a function of the core concentricity, cladding non-circularity and alignment capability. The optical return loss performance is a function of the index matching gel and the fibre end face preparation.

### 1.4 Operating environment

The tests selected combined with the severities and durations are representative of an outdoor enclosed environment defined as category U in EN 61753-1. To ensure that the product can be used in closures, boxes or street cabinet for categories A, G and S (as defined EN 61753-1) the specified lower temperature is extended to -40 °C and requirements for temporary flooding have been added.

### 1.5 Reliability

Whilst the anticipated service life expectancy of the product in this environment is 20 years, compliance with this specification does not guarantee the reliability of the product. This should be predicted using a recognised reliability assessment programme.

### 1.6 Quality assurance

Compliance with this specification does not guarantee the manufacturing consistency of the product. This should be maintained using a recognised quality assurance programme.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 60793-2-10, *Optical fibres — Part 2-10: Product specifications — Sectional specification for category A1 multimode fibres* (IEC 60793-2-10)

EN 61753-1, *Fibre optic interconnecting devices and passive components performance standard — Part 1: General and guidance for performance standards* (IEC 61753-1)

EN 61300-2-1, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-1: Tests — Vibration (sinusoidal)* (IEC 61300-2-1)

EN 61300-2-4, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-4: Tests — Fibre/cable retention (IEC 61300-2-4)*

EN 61300-2-5, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-5: Tests — Torsion/twist (IEC 61300-2-5)*

EN 61300-2-7, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-7: Tests — Bending moment (IEC 61300-2-7)*

EN 61300-2-9, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-9: Tests — Shock (IEC 61300-2-9)*

EN 61300-2-17, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-18: Tests — Cold (IEC 61300-2-17)*

EN 61300-2-18, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-18: Tests — Dry heat — High temperature endurance (IEC 61300-2-18)*

EN 61300-2-22, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-22: Tests — Change of temperature (IEC 61300-2-22)*

EN 61300-2-26, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-26: Tests — Salt mist (IEC 61300-2-26)*

EN 61300-2-27, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-27: Tests — Dust — Laminar flow (IEC 61300-2-27)*

EN 61300-2-33, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-33: Tests — Assembly and disassembly of closures (IEC 61300-2-33)*

EN 61300-2-45, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-45: Tests — Durability test by water immersion (IEC 61300-2-45)*

EN 61300-2-46, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 2-46: Tests — Damp heat cyclic (IEC 61300-2-46)*

EN 61300-3-3, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 3-3: Examinations and measurements — Active monitoring of changes in attenuation and return loss (IEC 61300-3-3)*

EN 61300-3-4, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 3-4: Examinations and measurements — Attenuation (IEC 61300-3-4)*

EN 61300-3-6, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 3-6: Examinations and measurements — Return loss (IEC 61300-3-6)*

EN 61300-3-28, *Fibre optic interconnecting devices and passive components — Basic test and measurement procedures — Part 3-28: Examinations and measurements — Transient loss (IEC 61300-3-28)*

### **3 Description**

#### **3.1 General**

A multimode mechanical fibre splice is a passive optical interconnection component which provides optical and mechanical continuity between two optical fibres. The products described in this specification are based on mechanical alignment of two cleaved fibres. The fibres are protected against ingress of dust or water by a sealing material, generally an index matching gel, to both minimise reflections and to improve attenuation at the glass/gel/glass interface.