
**Acoustics and vibration — Laboratory
measurement of vibro-acoustic transfer
properties of resilient elements —**

Part 5:

**Driving point method for determination of
the low-frequency transfer stiffness of
resilient supports for translatory motion**

*Acoustique et vibrations — Mesurage en laboratoire des propriétés de
transfert vibro-acoustique des éléments élastiques —*

*Partie 5: Méthode du point d'application pour la détermination de la
raideur dynamique de transfert basse fréquence en translation des
supports élastiques*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

This document is a preview generated by EVS



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	2
3 Terms and definitions.....	3
4 Principle.....	5
5 Test arrangements.....	6
5.1 Normal translations.....	6
5.2 Transverse translations.....	7
5.3 Suppression of unwanted vibrations.....	8
6 Criteria for adequacy of the test arrangement.....	11
6.1 General requirements.....	11
6.2 Determination of upper limiting frequency.....	12
6.3 Force transducers.....	12
6.4 Accelerometers.....	12
6.5 Summation of signals.....	13
6.6 Analysers.....	13
7 Test procedures.....	13
7.1 Selection of force measurement system and force distribution plates.....	13
7.2 Installation of the test element.....	13
7.3 Mounting and connection of accelerometers.....	14
7.4 Mounting and connections of the vibration exciter.....	14
7.5 Source signal.....	14
7.6 Measurements.....	14
7.7 Test for linearity.....	15
8 Evaluation of test results.....	16
8.1 Calculation of dynamic driving-point stiffness.....	16
8.2 One-third-octave-band values of the frequency-averaged dynamic driving-point stiffness.....	17
8.3 One-third-octave-band values of the frequency-averaged transfer stiffness.....	17
8.4 Presentation of one-third-octave-band results.....	17
8.5 Presentation of narrow-band data.....	18
9 Information to be recorded.....	19
10 Test report.....	20
Annex A (informative) Static load-deflection curve.....	21
Annex B (informative) Measurement uncertainty.....	22
Bibliography.....	26

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10846-5 was prepared by Technical Committee ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*, and ISO/TC 108, *Mechanical vibration, shock and condition monitoring*.

ISO 10846 consists of the following parts, under the general title *Acoustics and vibration — Laboratory measurement of vibro-acoustic transfer properties of resilient elements*:

- *Part 1: Principles and guidelines*
- *Part 2: Direct method for determination of the dynamic stiffness of resilient supports for translatory motion*
- *Part 3: Indirect method for determination of the dynamic stiffness of resilient supports for translatory motion*
- *Part 4: Dynamic stiffness of elements other than resilient supports for translatory motion*
- *Part 5: Driving point method for determination of the low-frequency transfer stiffness of resilient supports for translatory motion*

Introduction

Passive vibration isolators of various kinds are used to reduce the transmission of vibration. Examples are automobile engine mounts, resilient supports for buildings, resilient mounts and flexible shaft couplings for shipboard machinery and small isolators in household appliances.

This part of ISO 10846 specifies a driving point method for measuring the low-frequency dynamic transfer stiffness function of linear resilient supports. This includes resilient supports with non-linear static load-deflection characteristics provided that the elements show an approximate linearity for vibration behaviour for a given static preload. This part of ISO 10846 belongs to a series of International Standards on methods for the laboratory measurement of vibro-acoustic properties of resilient elements, which also includes documents on measurement principles, on a direct method and on an indirect method. ISO 10846-1 provides global guidance for the selection of the appropriate International Standard.

The laboratory conditions described in this part of ISO 10846 include the application of static preload, where appropriate.

The results of the method described in this part of ISO 10846 are useful for resilient supports that are used to prevent low-frequency vibration problems and to attenuate structure-borne sound in the lower part of the audible frequency range. However, for complete characterization of resilient elements that are used to attenuate low-frequency vibration or shock excursions, additional information is needed, which is not provided by this method.

This document is a preview generated by EVS

Acoustics and vibration — Laboratory measurement of vibro-acoustic transfer properties of resilient elements —

Part 5:

Driving point method for determination of the low-frequency transfer stiffness of resilient supports for translatory motion

1 Scope

This part of ISO 10846 specifies a driving point method for determining the low-frequency transfer stiffness for translations of resilient supports under a specified preload. The method concerns the laboratory measurement of vibrations and forces on the input side with the output side blocked, and is called the “driving point method”.

The stiffness resulting from measuring the input displacement (velocity, acceleration) and input force is the dynamic driving point stiffness. Only at low frequencies, where the driving point stiffness and the transfer stiffness are equal, can this method be used for determination of the dynamic transfer stiffness.

NOTE 1 In ISO 10846-2, the direct method for measuring the dynamic transfer stiffness is covered. The direct method covers the determination of the low-frequency dynamic transfer stiffness and it covers, in principle, a wider frequency range than the driving point method. Nevertheless, the driving point method is covered in the ISO 10846 series of international standards as well. It is considered as a valuable option for owners of (often expensive) test rigs for driving point stiffness measurements, to extend the use of these rigs with the determination of low-frequency dynamic transfer stiffness.

The method is applicable to test elements with parallel flanges (see Figure 1).

Resilient elements, which are the subject of this part of ISO 10846, are those which are used to reduce

- a) the transmission of vibration in the lower part of the audible frequency range (typically 20 Hz to 200 Hz) to a structure which may, for example, radiate unwanted fluid-borne sound (airborne, waterborne or others), and
- b) the transmission of low-frequency vibrations (typically 1 Hz to 80 Hz) which may, for example, act upon human subjects or cause damage to structures of any size when vibration is too severe.

NOTE 2 In practice, the size of available test rig(s) determines restrictions for very small and for very large resilient supports.


NOTE 3 Samples of continuous supports of strips and mats are included in the method. Whether or not the sample describes the behaviour of the complex system sufficiently is the responsibility of the user of this part of ISO 10846.

Measurements for translations normal and transverse to the flanges are covered in this part of ISO 10846. The method covers the frequency range from $f_1 = 1$ Hz to the upper limiting frequency f_{UL} . Typically $50 \text{ Hz} \leq f_{UL} \leq 200 \text{ Hz}$.

The data obtained according to the method specified in this part of ISO 10846 can be used for the following:

- product information provided by manufacturers and suppliers;

- information during product development;
- quality control, and
- calculation of the transfer of vibration through isolators.

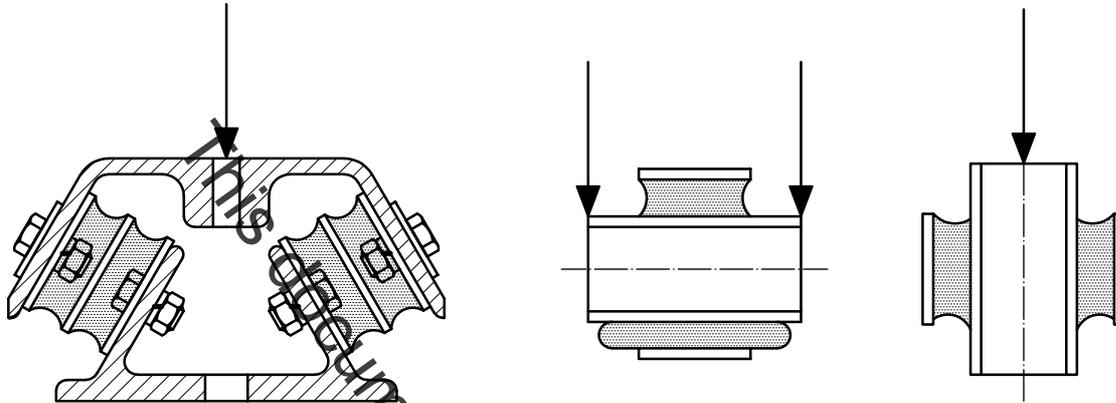

NOTE 1 When a resilient support has no parallel flanges, an auxiliary fixture should be included as part of the test element to arrange for parallel flanges.

NOTE 2 Arrows indicate load direction.

Figure 1 — Example of resilient supports with parallel flanges

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 266, *Acoustics — Preferred frequencies*

ISO 2041:—¹⁾, *Mechanical vibration, shock and condition monitoring — Vocabulary*

ISO 5348, *Mechanical vibration and shock — Mechanical mounting of accelerometers*

ISO 7626-1, *Vibration and shock — Experimental determination of mechanical mobility — Part 1: Basic definitions and transducers*

ISO 10846-1, *Acoustics and vibration — Laboratory measurement of vibro-acoustic transfer properties of resilient elements — Part 1: Principles and guidelines*

ISO 16063-21, *Methods for the calibration of vibration and shock transducers — Part 21: Vibration calibration by comparison to a reference transducer*

ISO/IEC Guide 98-3²⁾, *Uncertainty of Measurement — Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

1) To be published. (Revision of ISO 2041:1990)

2) ISO/IEC Guide 98-3 will be published as a re-issue of the *Guide to the expression of uncertainty in measurement (GUM)*, 1995.