

---

---

**Fibre-reinforced plastic composites —  
Determination of interlaminar  
strength and modulus by double beam  
shear test**

*Composites plastiques renforcés de fibres — Détermination de  
la résistance interlaminaire et du module par un double essai de  
cisaillement de faisceau*



This document is a preview generated by EMS



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Principle</b> .....	<b>3</b>
<b>5 Apparatus</b> .....	<b>4</b>
<b>6 Test specimens</b> .....	<b>6</b>
6.1 Shape and dimensions.....	6
6.1.1 Preferred specimen size.....	6
6.1.2 Alternative specimen size.....	7
6.2 Preparation of specimens.....	7
6.2.1 General.....	7
6.2.2 Machining the test specimens.....	7
6.3 Checking the test specimens.....	7
<b>7 Number of test specimens</b> .....	<b>7</b>
<b>8 Conditioning</b> .....	<b>7</b>
<b>9 Procedure</b> .....	<b>7</b>
9.1 Test conditions.....	7
9.2 Specimen dimensions.....	8
9.3 Testing speed.....	8
9.4 Data collection.....	8
9.5 Failure mode acceptance.....	8
9.6 Critical load.....	8
9.7 Slope of load-displacement curve.....	8
<b>10 Calculation and expression of results</b> .....	<b>9</b>
10.1 Interlaminar shear strength.....	9
10.2 Interlaminar shear modulus.....	10
<b>11 Precision</b> .....	<b>11</b>
<b>12 Test report</b> .....	<b>13</b>
<b>Annex A (informative) Additional details relating to calculation of shear modulus, <math>G_{13}</math></b> .....	<b>14</b>
<b>Annex B (informative) Interlaboratory study</b> .....	<b>17</b>
<b>Bibliography</b> .....	<b>21</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 13, *Composites and reinforcement fibres*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

Interlaminar shear (ILS) properties of load-bearing composite laminates are important for structural design, stress analysis and numerical modelling, material development and selection, component manufacture as well as for repair of delaminated structural components. A number of test methods have been developed for the determination of shear properties of composite laminates and several have been standardized, including short beam strength (SBS) [ASTM D2344, ISO 14130, EN 2377<sup>1)</sup> and EN 2563<sup>1)</sup>], V-notched beam (known also as Iosipescu shear), ASTM D5379, V-notched rail (ASTM D7078) and notched tension (ASTM D3846, BS 4994) or notched compression (BS 6464).

SBS methods are very popular due to their simplicity in specimen preparation, test operation and cost-effectiveness, though they are used to determine only an apparent ILS strength for QA purposes rather than for use in design. However, a loaded SBS specimen does not have a pure ILS region within its gauge section so it often fails in a number of modes, dependent on, amongst others, type of composite materials, lay-up and specimen thickness. Unacceptable SBS failure modes include flexural failure, local crushing (under central loading roller) and plastic deformation and roller-induced through-thickness shear band.

The DBS method is based on loading a composite beam on double support spans (i.e. between 5 loading points), which generates a stress state that minimises axial bending stresses while promoting interlaminar shear stresses. In DBS tests delamination occurred consistently within one of the pure ILS regions in the specimens, for a range of laminated composite materials or lay-ups.

Comparisons with the SBS ILS strength results indicated that the DBS ILS strengths were 20 % to >30 % higher. In addition, a value of the interlaminar shear modulus can be obtained, providing values of  $E_{11}$ ,  $E_{22}$ ,  $G_{12}$  and  $\nu_{12}$  are known or measured separately for the material under test.

---

1) CEN Aerospace series.



# Fibre-reinforced plastic composites — Determination of interlaminar strength and modulus by double beam shear test

## 1 Scope

This document specifies a procedure for determining the interlaminar strength, and modulus, by double beam shear (DBS) tests of fibre-reinforced plastic composites.

The method is suitable for use with glass or carbon fibre-reinforced plastic composites with thermoset matrices, providing an acceptable interlaminar failure is obtained.

This document only applies to laminate with a symmetrical and balanced lay-up as it avoids bending/twisting or bending/extension coupling deformations (see 6.2). The preferred lay-up is unidirectional, with fibres aligned along the specimen (axial) length.

The suitability of the test for specific lay-ups, matrices and fibres (e.g. natural) are assessed by trial tests to ensure the correct delamination failures are obtained.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 291, *Plastics — Standard atmospheres for conditioning and testing*

ISO 472, *Plastics — Vocabulary*

ISO 1268 (all parts), *Fibre-reinforced plastics — Methods of producing test plates*

ISO 2602, *Statistical interpretation of test results — Estimation of the mean — Confidence interval*

ISO 5893, *Rubber and plastics test equipment — Tensile, flexural and compression types (constant rate of traverse) — Specification*

ISO 16012, *Plastics — Determination of linear dimensions of test specimens*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 472 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1

#### critical load

$F_{crit}$

load at delamination, as defined in 9.5 for acceptable failure modes

Note 1 to entry: See Cases 1-3.

Note 2 to entry: It is expressed in newtons (N).

**3.2  
interlaminar shear strength**

$\tau_{13 \max}$   
shear strength calculated from the critical load

Note 1 to entry: See [10.1](#).

Note 2 to entry: It is expressed in megapascals (MPa).

**3.3  
interlaminar shear modulus**

$G_{13}$   
shear modulus calculated from the slope of the load-displacement curve

Note 1 to entry: See [10.2](#).

Note 2 to entry: It is expressed in gigapascals (GPa).

**3.4  
span**

$L$   
distance between the outermost support rollers

Note 1 to entry: It is expressed in millimetres (mm).

**3.5 Specimen coordinate axes**

NOTE 1 The direction parallel with the plate longitudinal axis is the "1" direction and the direction perpendicular, is the "2" direction (see ISO 1268-4). The direction "3" is perpendicular to the plate (i.e. the through-thickness direction).

NOTE 2 See [Figure 1](#).

**3.5.1  
longitudinal tensile modulus**

$E_{11}$   
tensile modulus in the specimen longitudinal or 1 direction

Note 1 to entry: It is expressed in gigapascals (GPa).

**3.5.2  
transverse tensile modulus**

$E_{22}$   
tensile modulus in the perpendicular or 2 direction

Note 1 to entry: It is expressed in gigapascals (GPa).

**3.5.3  
in-plane shear modulus**

$G_{12}$   
shear modulus in the 1-2 plane


Note 1 to entry: It is expressed in gigapascals (GPa).

**3.5.4  
in-plane poisson ratio**

$\nu_{12}$   
Poisson's ratio in the 1-2 plane

Note 1 to entry: It is dimensionless.

Note 2 to entry: Properties defined in 3.5.1 to 3.5.4 are required for calculation of the interlaminar shear modulus using either manufacturer's or measured data (see 10.2).

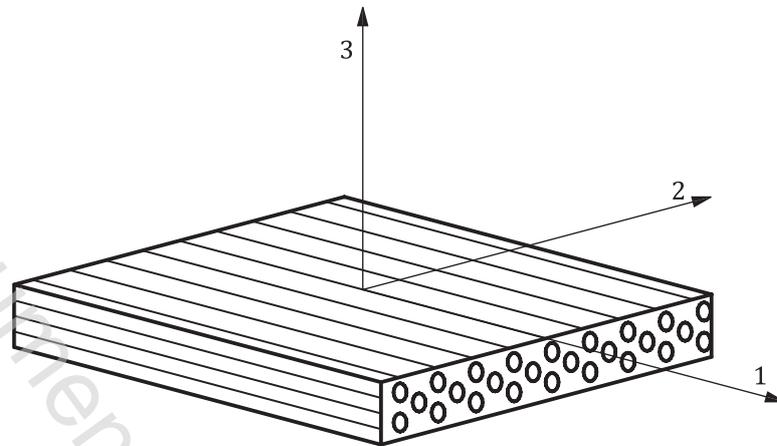

#### Key

- 1 direction parallel with the plate longitudinal axis
- 2 direction perpendicular with the plate longitudinal axis
- 3 direction perpendicular to the plate (i.e. the through-thickness direction, with plies layered perpendicular to this direction)

**Figure 1 — Unidirectional reinforced composites plate element showing symmetry axes**

## 4 Principle

A test specimen consisting of a beam of rectangular cross-section is loaded in 5-point flexure, as shown in Figure 2. The applied load generates regions of pure interlaminar shear stress, as indicated in Figure 2. The critical load sustained by the specimen when delamination failure occurs is used to determine the interlaminar shear strength. In addition, the deflection of the specimen under load is used to determine the interlaminar shear modulus. In order to calculate the interlaminar shear modulus, it is necessary to know or measure the following properties:  $E_{11}$ ,  $E_{22}$ ,  $G_{12}$  and  $\nu_{12}$ .