

INTERNATIONAL
STANDARDIZED
PROFILE

ISO/IEC
ISP
11185-14

First edition
1995-07-15

**Information technology — International
Standardized Profiles FVT2nn — Virtual
Terminal Basic Class — Register of control
object type definitions —**

Part 14:
FVT2112 — Printer Control Object

*Technologies de l'information — Profils normalisés internationaux
FVT2nn — Classe de base de terminal virtuel — Registre de définitions
de type d'objet de commande —*

Partie 14: FVT2112 — Objet de commande d'impression



Reference number
ISO/IEC ISP 11185-14:1995(E)

Contents	Page
Foreword	iii
Introduction	iv
1 Scope	1
2 Normative references	3
3 Definitions	4
4 Abbreviations	4
5 Principles of conformance to VT Profiles	4
6 Printer control object	4
Annexes	
A ISPICS Requirements List	7
B Committed Printing	8

© ISO/IEC 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland
Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) together form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in this work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. In addition to developing International Standards, ISO/IEC JTC 1 has created a Special Group on Functional Standardization for the elaboration of International Standardized Profiles.

An International Standardized Profile is an internationally agreed, harmonized document which identifies a standard or group of standards, together with options and parameters, necessary to accomplish a function or set of functions.

Draft International Standardized Profiles are circulated to national bodies for voting. Publication as an International Standardized Profile requires approval by at least 75% of the national bodies casting a vote.

International Standardized Profile ISO/IEC ISP 11185-3 was prepared with the collaboration of

- *OSI Asia-Oceania Workshop (AOW)*;
- *European Workshop for Open Systems (EWOS)*;
- *OSI Environment Implementors' Workshop (OIW)*.

This International Standardized Profile ISO/IEC ISP 11185 forms an International Register of information objects in accordance with the procedures for the operation of OSI Registration Authorities laid down in ISO/IEC 9834. It is issued in parts, with additional parts being issued as further entries are added to the register. Each part is prepared in accordance with an approval and maintenance process laid down by the Special Group on Functional Standardization of ISO/IEC JTC1, *Information technology*.

ISO/IEC ISP 11185 is issued under the general title *Information technology — International Standardized Profiles FVT2nn — Virtual Terminal Basic Class — Register of control object type definitions*. At present the following parts are published or are in the course of preparation:

- *Part 1: FVT211, FVT212 — Sequenced and Unsequenced Application Control Objects*
- *Part 2: FVT213, FVT214 — Sequenced and Unsequenced Terminal Control Objects*
- *Part 3: FVT215, FVT216 — Application RIO Record Loading Control Object, Terminal RIO Record Notification Control Object*
- *Part 4: FVT217 — Horizontal Tabulation Control Object*
- *Part 5: FVT218 — Logical Image Control Object*
- *Part 6: FVT219 — Status Message Control Object*
- *Part 7: FVT2110 — Entry-Control Control Object*
- *Part 8: FVT221 — Forms FEICO (Field Entry Instruction Control Object) No.1*
- *Part 9: FVT222 — Paged FEICO (Field Entry Instruction Control Object) No.1*
- *Part 10: FVT231 — Forms FEPCO (Field Entry Pilot Control Object) No.1*
- *Part 11: FVT232 — Paged FEPCO (Field Entry Pilot Control Object) No.1*
- *Part 12: FVT2116, FVT2117, FVT2118, FVT2119 — Generalized Telnet Synch, Signal, Negotiation and Subnegotiation Control Objects*
- *Part 13: FVT2111 — Waiting Time Control Object*
- *Part 14: FVT2112 — Printer Control Object*
- *Part 15: FVT2113 — Field Definition Management Control Object*
- *Part 16: FVT2114 — Terminal Signal Titles Control Object*
- *Part 17: FVT2115 — Help Text Control Object*

Annex A forms an integral part of this part of ISO/IEC ISP 11185. Annex B is for information only.

Introduction

This International Standardized Profile ISO/IEC ISP 11185 is defined within the context of Functional Standardization, in accordance with the principles specified in ISO/IEC TR 10000, "Framework and Taxonomy of International Standardized Profiles". The context of Functional Standardization is one part of the overall field of Information Technology (IT) standardization activities, covering base standards, profiles and registration mechanisms.

The Open Systems Interconnection (OSI) Standard ISO 9040 for the Virtual Terminal Basic Class Service identified a requirement for an International Register of VT Control Object type definitions. Procedures for the operation of this International Register are laid down in ISO/IEC 9834-5. This International Standardized Profile provides this register. The individual entries in this register constitute Interchange Format and Representation Profiles (F-Profiles) within the framework of ISO/IEC TR 10000.

This part of ISO/IEC ISP 11185 was developed in close cooperation between the three Regional OSI Workshops, namely the OSI Implementors' Workshop (OIW) of the United States, the European Workshop for Open Systems (EWOS) and the OSI Asia-Oceania Workshop (AOW). It was developed under the editorship of EWOS. The text is harmonized between these three Workshops and it has been ratified by the plenary assemblies of each Workshop.

Information technology — International Standardized Profiles FVT2nn — Virtual Terminal Basic Class — Register of control object type definitions

Part 14: FVT2112 — Printer Control Object

1 Scope

1.1 General

The concept of Profiles for OSI, and the structure of the International Standardized Profiles that document them, are defined in ISO/IEC TR 10000-1. Such Profiles are divided into a number of different classes and sub-classes. Two of these classes contain sub-classes comprising functions of the Virtual Terminal Basic Class Service and Protocol specified in the base standards ISO 9040 and ISO 9041. These are the Application Profiles (A-Profiles) and the Interchange Format and Representation Profiles (F-Profiles).

The relationship between A-Profiles and F-Profiles is described in ISO/IEC TR 10000-1, subclause 7.3.2 and is as follows. Application Layer base standards require, implicitly or explicitly, the structure of information carried or referenced by them to be specified for each instance of communication. It is the purpose of F-Profiles to specify such information structures. Particular functional requirements may then be met by the combination of an A-Profile with one or more F-Profiles.

Establishment of a VT-association involves the selection by negotiation of a particular Virtual Terminal Environment profile (VTE-profile), and of particular values for any arguments of that VTE-profile. The VTE-profile specification, and possibly also the values of certain VTE-profile arguments, may in turn reference the definitions of VT control object types and assignment types. These VTE-profiles, control object types and

assignment types are thus information structures that require explicit reference within the VT protocol. Particular instances of these structures are fully defined within the base standards, but the base standards also provide for further instances to be defined by registration. Each registered instance constitutes an F-Profile within the framework of ISO/IEC TR 10000.

The Virtual Terminal Basic Class Service and Protocol may be used to realise a wide range of distinct functions. Particular functions may be realised through the selection of appropriate VT functional units, F-Profiles and other VTE-profile argument values. The specification of the selection required to realise a particular function and to promote interoperability constitutes a Virtual Terminal A-Profile within the framework of ISO/IEC TR 10000.

The three International Registers of VT information structures and the specifications of VT Application Profiles are each published as a separate multi-part ISP as follows:

- ISO/IEC ISP 11184 is the Register of VTE-profiles;
- ISO/IEC ISP 11185 is the Register of control object type definitions;
- ISO/IEC ISP 11186 is the Register of assignment-type definitions;
- ISO/IEC ISP 11187 contains the specifications of VT Application Profiles.

This part of ISO/IEC ISP 11185 contains the type definitions of a control object that may be used to map regions of the display object exclusively on to a display surface such as a

screen and a printing device and to control the operations of the printer

1.2 Position within the taxonomy

The taxonomy of International Standardized Profiles for OSI is laid down in ISO/IEC TR 10000-2. Within the classification scheme of this taxonomy, the OSI Profiles specified in this International Standardized Profile are in the Virtual Terminal Registered Object sub-class of the class of Interchange Format and Representation Profiles.

A Profile within this subclass has a Profile identifier of the form FVT abc , where abc is a structured numerical identifier that identifies the position of the Profile within each of the three levels of subdivision of the subclass. The values of a and b are single digits but c is an integer that is not necessarily a single digit.

In principle the ISO Virtual Terminal model allows for multiple classes of operation, although at the time of publication of this International Standardized Profile only the Basic Class has been defined. The value of the identifier component a distinguishes between distinct types of information object as follows:

- $a = 1$ for Basic Class VTE-profiles;
- $a = 2$ for Basic Class Control Objects;
- $a = 3$ for Basic Class Assignment Types.

Values of a greater than 3 are reserved for future developments.

This International Standardized Profile ISO/IEC ISP 11185 contains the specifications of the Profiles with identifiers of the form FVT2 bc . For this form of identifier, the component b distinguishes between the five major classifications of Basic Class Control Objects as follows:

- $b = 1$ for Miscellaneous Control Objects;
- $b = 2$ for Field Entry Instruction Control Objects;
- $b = 3$ for Field Entry Pilot Control Objects;
- $b = 4$ for Reference Information Objects;
- $b = 5$ for Termination Conditions Control Objects.

Each of these classifications corresponds to a sub-register under the procedures of ISO/IEC 9834-5. The identifier component c is the serial number of the control object type in the appropriate sub-register. Values of b greater than 5 are reserved for new classifications of Basic Class Control Objects that may be defined in future amendments to ISO 9040.

This part of ISO/IEC ISP 11185 contains the type definitions of the Basic Class Control Object with the Profile identifier FVT2112 — Printer CO.

1.3 Scenario

The specification of the Virtual Terminal Service is given in ISO 9040. It is based on a model in which two VT-users communicate by means of a shared Conceptual Communication Area (CCA) that is a conceptual part of the VT service-provider. Information exchange is modelled by one VT-user

updating the content of the CCA and the changed state of the CCA then being made accessible to the peer VT-user.

Control objects (COs) form one of the types of information object that may be present in the CCA. This is illustrated in figure 1, in which CO-1, CO-2, ... CO- n represent a number of different control objects present in the CCA. The negotiation during establishment of a VT-association will determine whether or not these will include the control object whose specifications are given in this part of ISO/IEC ISP 11185.

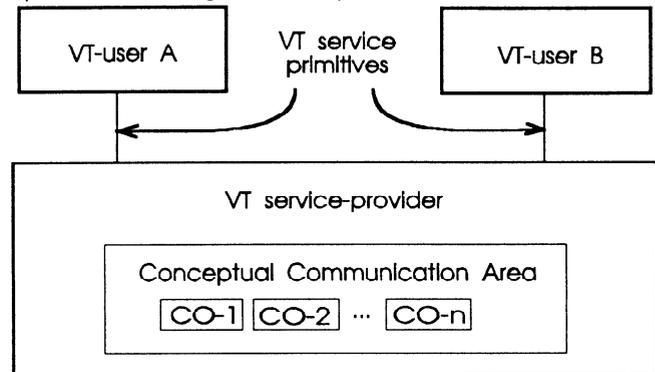


Figure 1 - Control Objects in the VT Service Model

The CCA is structured by the Virtual Terminal Service into a number of components. For a control object the Data Structure Definition (DSD) component of the CCA contains the syntax of its information content, including the range of possible values and the permitted update operations. The current value of its information content is contained in the Control, Signal and Status store (CSS) component. Updates to the current value take place through the issue of VT service primitives by one VT-user to the service-provider. Changes of state of the CCA are made accessible through the issue of VT service primitives by the service-provider to the peer VT-user.

By ISO 9040, clause 14, COs enable VT-users to handle control information related to virtual terminal functions and to real devices. This control is exercised by the VT-users through semantics associated with the information content and with the update operations of the CO. Definition of the semantics, or specification of the source of the semantics if the semantic details are not fully prescribed, forms part of the registered definition of the CO. These semantics are not however of concern to the VT service-provider itself. The DSD will contain an ASN.1 object identifier that identifies the registered definition, but the VT service-provider merely acts as a repository of this value. It is only the VT-user that requires knowledge of the registered definition.

NOTE 1 — The VTE-parameter values that determine the syntax of the information content may not be negotiated explicitly during association establishment. Moreover, in the case of non-parametric COs these values do not determine the details of the syntax. Such values and details form part of the registered definition of the CO. Since the VT service-provider is not required to have knowledge of this registered definition, in principle the VT-users provide the VT service-provider with such information through local management procedures. Whether or not this is necessary in practice depends on the configuration of the implementations concerned.

The control object defined in this part of ISO/IEC ISP 11185 assumes an asymmetry between the two communicating end systems. One end system is assumed to have a terminal rôle and to contain devices for the input and display of data and for signalling. These devices form part of the VT-user component of that end system. The other end system is assumed to have an application rôle and to contain an application package that the terminal end system desires to access. This asymmetry may, but need not, be recognised by the VT Service; provision for such recognition exists only in an S-mode VT-association. The control object defined in this part of ISO/IEC ISP 11185 is used to enable the application package to issue control signals to the devices of the terminal end system.

Control objects of the types defined in this part of ISO/IEC ISP 11185 are used to enable the terminal end system to issue signals to the application package without the need for the VT service-provider to be aware of the semantic significance placed on these signals by the application package. These signals are issued in response to the operation of an object updating device by the human user of the terminal end system.

The Virtual Terminal Protocol specification given in ISO 9041-1 models the VT service-provider in terms of protocol exchange between two Virtual Terminal Protocol Machines (VTPMs), each with its own CCA. The CCA of each VTPM is updated both by service primitives received from its own VT-user and by protocol elements received from the peer VTPM. Corresponding service primitives and protocol elements are issued by the VTPM to provide notification of changes to the content of its CCA. This is illustrated in figure 2 in the context of the asymmetric end systems described above. The control object type definitions given in this part of ISO/IEC ISP 11185 are expressed in terms of this model.

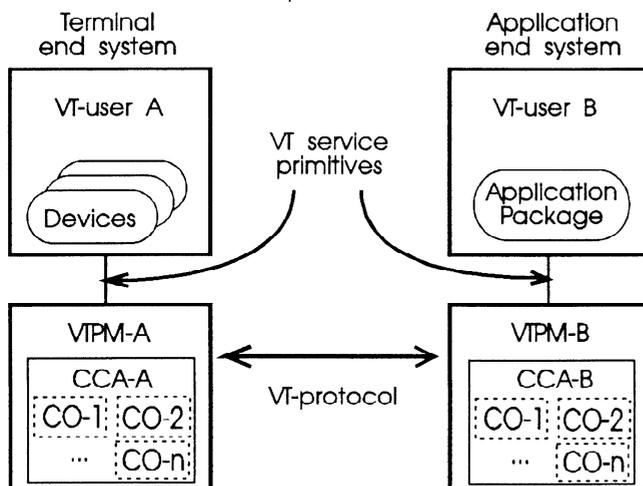


Figure 2 - Control objects in the VT Protocol model

For certain types of control object the abstract syntax of ISO 9041-1 does not provide a complete specification for the representation of CO update operations. This arises where the abstract syntax of ISO 9041-1 makes use of an ASN.1 any type, or where symbolic values have to be encoded in terms of an ASN.1 integer type. Control object type definitions are required by ISO/IEC 9834-5 to provide the necessary refinement of the abstract syntax.

NOTE 2 — Since an abstract syntax is made available for use through its inclusion in a presentation context, and since the Presentation service-provider has no knowledge of control object type definitions, in principle the VT-users provide the Presentation service-provider with these refinements to the abstract syntax through local management procedures. Whether or not this is necessary in practice depends on the configuration of the implementations concerned

2 Normative references

The following documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC ISP 11185. At the time of publication, the editions indicated were valid. All documents are subject to revision, and parties to agreements based on this International Standardized Profile are warned against automatically applying any more recent editions of the documents listed below, since the nature of references made by ISPs to such documents is that they may be specific to a particular edition. Members of IEC and ISO maintain registers of currently valid International Standards and ISPs and ITU-T maintains published editions of its current Recommendations.

ISO/IEC 7498-1:1994, *Information technology - Open Systems Interconnection - Basic Reference Model - Part 1: The Basic Model*. (See also ITU-T Recommendation X.200).

ISO 8822:1994, *Information technology - Open Systems Interconnection - Presentation service definition*. (See also ITU-T Recommendation X.216).

ISO/IEC 8824:1990, *Information technology - Open Systems Interconnection - Specification of Abstract Syntax Notation One (ASN.1)*. (See also CCITT Recommendation X.208).

ISO 9040:1990, *Information technology - Open Systems Interconnection - Virtual Terminal Basic Class Service*.

ISO 9041-1:1990, *Information technology - Open Systems Interconnection - Virtual Terminal Basic Class Protocol - Part 1: Specification*.

ISO/IEC 9041-2:1993, *Information technology - Open Systems Interconnection - Virtual Terminal Basic Class Protocol - Part 2: Protocol Implementation Conformance Statement (PICS) Proforma*.

ISO 9834-1:1993, *Information technology - Open Systems Interconnection - Procedures for the Operation of OSI Registration Authorities - Part 1: General Procedures*. (See also CCITT Recommendation X.660).

ISO 9834-5:1991, *Information technology - Open Systems Interconnection - Procedures for the Operation of OSI Registration Authorities - Part 5: Register of VT Control Object Definitions*.

ISO/IEC TR 10000-1:1994, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 1: General principles and documentation framework*.

ISO/IEC TR 10000-2:1994, *Information technology - Framework and taxonomy of International Standardized Profiles - Part 2: Principles and Taxonomy for OSI Profiles*.

ISO/IEC 10731:1994, *Information technology - Open Systems Interconnection - Basic Reference Model - Conventions for the definition of OSI services*. (See also ITU-T Recommendation X.210).

3 Definitions

For the purposes of this part of ISO/IEC 11185, the following definitions apply.

3.1 General OSI terminology

3.1.1 This part of ISO/IEC ISP 11185 makes use of the following terms defined in ISO/IEC 10731:

- a) service primitive;
- b) service-provider.

3.1.2 This part of ISO/IEC ISP 11185 makes use of the following terms defined in ISO 8822:

- a) abstract syntax;
- b) presentation context.

3.1.3 This part of ISO/IEC ISP 11185 makes use of the following terms defined in ISO/IEC 8824:

- a) any type;
- b) object descriptor type;
- c) object identifier.

3.1.4 This part of ISO/IEC ISP 11185 makes use of the following terms defined in ISO/IEC 9834-1:

- a) registration;
- b) registration-structured-name.

3.2 Terminology of VT base standards

3.2.1 This part of ISO/IEC ISP 11185 makes use of the following terms defined in ISO 9040:

- a) control object;
- b) device object;
- c) VT-association;
- d) VT-environment (VTE);
- e) VT-user;
- f) VTE-parameter;
- g) VTE-profile;
- h) VTE-profile argument.

3.2.2 This part of ISO/IEC ISP 11185 makes use of the following terms defined in ISO 9041-1:

- a) protocol element.

4 Abbreviations

For the purposes of this International Standardized Profile the following abbreviations apply.

AOW	OSI Asia-Oceania Workshop;
EWOS	European Workshop for Open Systems;
OIW	OSI Implementors' Workshop.

All other abbreviations used are defined in ISO/IEC TR 10000-1 or ISO 9040.

5 Principles of conformance to VT Profiles

An implementation of the Virtual Terminal Protocol conforms to an FVT2nn Profile that defines a control object type if the protocol implementation is capable of sending and receiving PDUs corresponding to all update operations permitted for that CO type. Conformance of a protocol implementation to an FVT2nn Profile does not place requirements on the ability of the implementation to negotiate the presence in the CCA of an instance of this CO type. Such requirements fall within the scope of conformance to an FVT1nn Profile that specifies a VTE-profile.

A system that includes an implementation of the VT Protocol may be claimed to conform also to an AVTnn Profile. Conformance to an AVTnn Profile may require that CO update operations received by the VT-user component of the system are interpreted in accordance with the semantics defined within the appropriate CO type definition. Conformance to CO semantics is not within the scope of conformance to any FVTnnn Profile.

The conformance requirements of the Virtual Terminal Protocol are specified in ISO 9041-1, clause 13. The supplier of a protocol implementation which is claimed to conform to ISO 9041-1 is required to complete a copy of the PICS proforma provided in ISO/IEC 9041-2. Annex A of this part of ISO/IEC ISP 11185 provides an ISPICS Requirements List (IPRL) for the Profile FVT2112 specified herein. This IPRL specifies constraints on the answers that may be given in the completed PICS for a protocol implementation that claims conformance to this Profile.

6 Printer control object

6.1 Entry number

This is the twelfth in the sub-register for Miscellaneous Control Objects. This register assigns it the entry number:

MISCO-12

6.2 Name of sponsoring authority

This entry is sponsored by the European Workshop for Open Systems (EWOS).

6.3 Date

The date of submission of this proposal is 1992-01-09.