
**Gaseous hydrogen land vehicle refuelling
connection devices**

*Dispositifs de raccordement pour le ravitaillement des véhicules
terrestres en hydrogène gazeux*

This document is a preview generated by EVS



This document is a preview generated by EVS



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 General construction requirements	3
5 Nozzles	3
6 Receptacles	4
7 Design verification test procedures	5
8 Instructions	13
9 Marking	14
Annex A (normative) Receptacle/nozzle interface envelope	15
Annex B (normative) Hydrogen Receptacles	16
Annex C (normative) Loose fit test fixtures	22
Annex D (normative) Tight fit test fixtures	27
Annex E (normative) Wear pattern test fixtures	32

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17268 was prepared by Technical Committee ISO/TC 197, *Hydrogen technologies*.

This second edition cancels and replaces the first edition (ISO 17268:2006), which has been technically revised.

Gaseous hydrogen land vehicle refuelling connection devices

1 Scope

This International Standard defines the design, safety and operation characteristics of gaseous hydrogen land vehicle (GHLV) refuelling connectors.

GHLV refuelling connectors consist of the following components, as applicable:

- receptacle and protective cap (mounted on vehicle);
- nozzle.

This International Standard applies to refuelling connectors which have working pressures of 11 MPa, 25 MPa, 35 MPa and 70 MPa, hereinafter referred to in this International Standard as the following:

- H11 – 11 MPa at 15 °C;
- H25 – 25 MPa at 15 °C;
- H35 – 35 MPa at 15 °C;
- H35HF – 35 MPa at 15 °C (high flow for commercial vehicle applications);
- H70 – 70 MPa at 15 °C.

Nozzles and receptacles that meet the requirements of this International Standard will only allow GHLVs to be filled by fuelling stations dispensing hydrogen with nominal working pressures equal to or lower than the vehicle fuel system working pressure. They will not allow GHLV to be filled by fuelling stations dispensing blends of hydrogen with natural gas.

Refuelling connectors dispensing blends of hydrogen with natural gas are excluded from the scope of this International Standard.

NOTE This International Standard can be used for certification purposes.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 188, *Rubber, vulcanized or thermoplastic — Accelerated ageing and heat resistance tests*

ISO 1431-1, *Rubber, vulcanized or thermoplastic — Resistance to ozone cracking — Part 1: Static and dynamic strain testing*

ISO 9227, *Corrosion tests in artificial atmospheres — Salt spray tests*

ISO 12103-1, *Road vehicles — Test dust for filter evaluation — Part 1: Arizona test dust*

ISO 14687-2, *Hydrogen fuel — Product specification — Part 2: Proton exchange membrane (PEM) fuel cell applications for road vehicles*

ISO 15501-1, *Road vehicles — Compressed natural gas (CNG) fuel systems — Part 1: Safety requirements*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

- 3.1 connector**
joined assembly of nozzle and receptacle which permits the transfer of hydrogen
- 3.2 cycle**
the process of making a positive connection between the nozzle and the receptacle, pressurizing to the maximum working pressure, depressurising and disconnecting
- 3.3 dry helium**
helium with a dew point adequate to prevent condensation during testing and at least 99 % pure
- 3.4 dry hydrogen**
hydrogen which meets or exceeds the quality level in ISO 14687-2
- 3.5 leak test gas**
gas for testing leaks that consists of dry hydrogen, or dry helium, or blends of a minimum 10 % of hydrogen or helium with nitrogen.
- 3.6 maximum working pressure**
maximum pressure that a connector will experience in service independent of temperature
- NOTE The maximum working pressure is 125 % of the nominal working pressure at 15 °C for the purpose of testing of nozzles and receptacles in this International Standard.
- 3.7 nominal working pressure**
pressure for which the connector is intended to be operated for a given gas temperature of 15 °C
- NOTE This defines a full tank gas density.
- 3.8 nozzle**
device connected to a fuel dispensing system, which permits the quick connect and disconnect of fuel supply to the vehicle or storage system
- 3.9 positive locking means**
feature, which requires actuation of an interlocking mechanism to achieve proper connection of the nozzle to the receptacle before pressure is applied
- 3.10 protective cap**
means to prevent dirt and other contaminants from getting into the inlet of the vehicle receptacle
- 3.11 receptacle**
device connected to a vehicle or storage system which receives the nozzle
- NOTE This can also be referred to as a fuelling inlet of gas filling port in other documents.

4 General construction requirements

4.1 Nozzles and receptacles shall be designed in accordance with reasonable concepts of safety, durability and maintainability.

4.2 Nozzles and receptacles designed and tested in accordance with this International Standard shall

- a) prevent hydrogen fuelled vehicles from being filled by fuelling stations with working pressures or flow rates higher than the vehicle,
- b) prevent hydrogen fuelled vehicles from being filled by other compressed gas fuelling stations, and
- c) prevent other gaseous fuelled vehicles from being filled by hydrogen fuelling stations.

4.3 Nozzles and receptacles shall be well fitted and manufactured in accordance with good engineering practice.

4.4 Nozzles and receptacles shall be

- a) designed to minimise the possibility of incorrect assembly,
- b) designed to be secure against displacement, distortion, warping or other damage,
- c) constructed to maintain operational integrity under normal and reasonable conditions of handling and usage, and
- d) designed with no self-evident means of defeating the safety features.

4.5 Nozzles and receptacles shall be manufactured of materials suitable and compatible for use with compressed hydrogen at the pressure and the temperature ranges to which they will be subjected as specified in 5.8 and 6.9. Materials used in the construction of nozzles, receptacles and protective caps shall be non-sparking or spark-reducing. All pressure bearing and wetted components shall also be made from material that is compatible with deionised water. Non-metallic material compatibility shall be documented by the component manufacturer or an independent third party.

4.6 The nozzle shall be connected to or disconnected from the receptacle without the use of tools.

4.7 The H11 and H25 receptacles shall be mounted on the vehicle in compliance with ISO 15501-1. All other receptacles shall be mounted on the vehicle in compliance with the envelope requirements specified in Annex A.

4.8 Protective caps are intended to protect the receptacle from foreign debris and shall not hold pressure. Resistance shall be appropriate to prevent inadvertent dislodging. All protective caps shall have a retainer to attach them to the receptacle or vehicle.

5 Nozzles

5.1 Nozzles shall comply with the dimensional requirements of 6.1 to ensure proper interchangeability. Nozzles shall couple with receptacles of equal or higher nominal working pressures and they shall be designed so that they will not couple with receptacles of lower nominal working pressures. The nozzle shall extend to within 1 mm of the stop ring for all nominal working pressures. Nozzles shall be designed so that they will not couple with gaseous fuelled vehicles other than GHV.

5.2 Nozzles shall be one of the following three types.

- a) TYPE A - A nozzle for use with dispensing hoses that may remain fully pressurized at dispenser shutdown. The nozzle shall not allow gas to flow until a positive connection has been achieved. The nozzle shall be equipped with an integral valve or valves, incorporating an operating mechanism which first stops

the supply of gas and safely vents the trapped gas before allowing the disconnection of the nozzle from the receptacle. The operating mechanism shall ensure the vent connection is open before the release mechanism can be operated and the gas located between the nozzle shut-off valve and the receptacle check valve is safely vented prior to nozzle disconnection.

- b) TYPE B - A nozzle for use with dispensing hoses that may remain fully pressurized at dispenser shutdown. A separate three-way valve connected directly, or indirectly, to the inlet of the nozzle shall be used to safely vent trapped gas prior to nozzle disconnection. The nozzle shall not allow gas to flow until a positive connection has been achieved. Venting shall be achieved prior to disconnection of the nozzle. External three-way valves shall be constructed and marked so as to indicate clearly the open, shut and vent positions.
- c) TYPE C - A nozzle for use with dispensing hoses which are depressurized (0,5 MPa and below) at dispenser shutdown. The nozzle shall not allow gas to flow until a positive connection has been achieved. The function of preventing flow may be controlled by the dispenser as long as it is receiving a positive connection signal from the nozzle.

5.3 Nozzles shall be designed for a life of 100 000 cycles with manufacturer specified maintenance. The three-way valve used for actuating Type B nozzles shall meet the same number of cycles as the nozzle (i.e. 100 000 cycles).

5.4 The act of venting, or de-pressurising, of the connection space between all nozzle types and receptacles shall be performed prior to disconnection. A provision shall be made for the venting or de-pressurising of all nozzle types to be directed to a safe location.

5.5 The means for attaching the nozzle to the fuel dispensing system hose shall not rely on the joint between the male and female threads for sealing, such as tapered pipe threads.

5.6 The H11 and H25 nozzles shall fit within the envelope described in ISO 15501-1. All other nozzles shall fit within the envelope specified in Annex A.

5.7 Nozzles shall have a means to prevent the ingress of solid matter from upstream sources. For example, the requirement shall be deemed met if the nozzle has a filter upstream of adequate size to protect its functionality.

5.8 The nozzle shall be designed to operate properly at ambient temperatures ranging from $-40\text{ }^{\circ}\text{C}$ to $50\text{ }^{\circ}\text{C}$ and at hydrogen gas temperatures ranging from $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$.

5.9 The nozzle shall not have any mechanical means of opening the receptacle check valve.

6 Receptacles

6.1 Standard receptacle dimensions: A receptacle shall comply with the design specifications detailed in Annex B.

NOTE The main O-ring seal for all pressure ratings less than 70 MPa is situated at the leading edge of the receptacle. For the 70 MPa receptacle, the main O-ring seal is situated in the bore of the receptacle. The 70 MPa receptacle also includes an O-ring at the leading edge of the receptacle to seal with nozzles having pressure ratings less than 70 MPa.

6.2 Receptacles shall comply with all sections of this International Standard. The failure of any test conducted with the receptacle and nozzle test samples shall constitute a failure of the receptacle design.

6.3 Receptacles shall be designed for a life of 15 000 cycles and 15 years with manufacturer specified maintenance.

6.4 Receptacle designs, which employ means on the back diameter to accommodate mounting, or for mounting accessories or marking purposes, shall not have such means extend beyond the back diameter dimensions of the profile specified in Annex B, as applicable. Acceptable means shall include wrench flats,

protective cap anchoring grooves, use of hex stock, undercutting for marking, and threads for protective caps. Such receptacle designs shall not compromise proper nozzle interchangeability.

6.5 The receptacle shall be equipped with an internal check valve to prevent the escape of gas. The check valve shall be of the non-contact type, opening by differential pressure only.

6.6 The means for attaching the receptacle to the vehicle fuel system shall not rely on the joint between the male and female threads for sealing, such as tapered pipe threads.

6.7 Receptacles shall be designed so that they are either tolerant of solid contamination, or have a means to protect themselves from said contamination to maintain safe functionality. For example, the requirement shall be deemed met if the receptacle has a filter upstream of adequate size to protect the functionality of the check valve. A receptacle shall have a means to prevent the ingress of fluids and foreign matter when disconnected.

6.8 The receptacle shall have provisions to be firmly attached to the vehicle and shall comply with applicable abnormal load tests specified in 7.10.

6.9 The receptacle shall be designed to operate properly from $-40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$.

7 Design verification test procedures

7.1 General requirements

Nozzles and receptacles shall meet the requirements of all sections of this International Standard.

7.2 Test conditions

Unless otherwise stated

- a) tests shall be conducted at $20\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$,
- b) all pressure tests shall be conducted with leak test gas unless otherwise noted,
- c) all leak tests shall be conducted with leak test gas, and
- d) test fluids and devices shall be at equilibrium conditions with the test environment at the beginning of all tests.

7.3 Nozzle tests

Nozzle tests shall be performed with the test fixtures identified under Annex C, Annex D or Annex E, as applicable. A new receptacle test sample shall be used for each nozzle test. The failure of any test conducted with the nozzle and receptacle test sample shall constitute a failure of the nozzle design.

7.4 Receptacle tests

Receptacles shall be evaluated with nozzle(s) which have been deemed compliant to this International Standard. The failure of any test conducted with the receptacle and nozzle test samples shall constitute a failure of the receptacle design.

7.5 User – Machine interface

This test shall be performed to verify the connection and disconnection forces and torques of an unpressurized and pressurized device.

The disconnection forces and torques shall be applied in a direction that tends to disconnect and release the nozzle. The torque shall be applied to the disconnection/release actuator or three-way valve. For example, if there is a handle, the torque shall be applied through axis rotation of the nozzle handle equal to the exterior handling surface of the nozzle mechanism and in such a direction that tends to unhook and release the nozzle.

The test shall be deemed to be successfully passed if the following conditions are met:


- The appearance of the nozzle and receptacle shall be such as to clearly suggest the proper method of use.
- It shall not be possible to deliver gas using any nozzles unless the nozzle and receptacle are connected properly and positively locked.

- It shall not be possible to remove a nozzle when the contained pressure is greater than 1,0 MPa.
- Upon disconnection, all types of nozzles shall stop the flow of gas. No hazardous condition shall result from disconnection. Type C nozzles shall be at 0,5 MPa during this test.
- When the contained pressure is less than or equal to 0,5 MPa, Type A and B nozzles shall be capable of being disconnected with forces less than 225 N and torques less than 7 N•m.
- On unpressurised devices the axial force to connect and lock or unlock and disconnect the device shall be less than or equal to 90 N.
- On a secondary positive locking device which incorporates a rotary locking mechanism, the torque to lock or unlock the locking means shall not exceed 1 N•m.
- On a secondary positive locking device which incorporates an axial locking mechanism, the force to lock or unlock the locking means shall not exceed 90 N.

7.6 Dropping

This test shall be performed to verify that a nozzle can safely withstand a drop of 2 m under -40 °C conditions.

A nozzle conditioned at -40 °C for 24 hours shall be connected to a 5 m length of the appropriately rated fuelling hose, and then dropped 2 m onto a concrete floor as shown in Figure 1. The nozzle shall be dropped ten times within five minutes of removal from the conditioning chamber, then pressurised to maximum working pressure and subjected to ten additional drops within five further minutes.

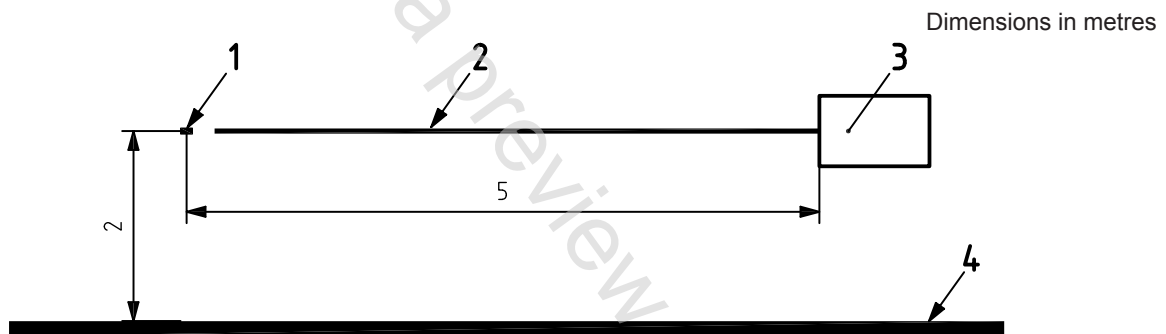

Key

- 1 Support
- 2 11 mm diameter fuelling hose
- 3 Nozzle
- 4 Concrete floor

Figure 1 — Test arrangement for dropping test

Following all drops described previously, the nozzle shall be capable of normal connection to the receptacle. In addition, the nozzle shall comply with the leakage tests specified in 7.7 and 7.11 as well as the hydrostatic strength test specified in 7.16.

7.7 Leakage at room temperature

These tests shall be performed to verify leakage rate of nozzle, receptacle, connector and receptacle check valve at room temperature.

Tests shall be conducted at 0,5 MPa and 150 % of the nominal working pressure. All devices shall be checked for leakage from the time of connection, through pressurization, to the time of disconnection.

To verify the leakage rate of the nozzle, the receptacle and the connector, pressurized leak test gas shall be applied to the inlet of the connector, the disconnected nozzle and the outlet of the disconnected receptacle.