
**Information technology —
Telecommunications and information
exchange between systems — High rate
60 GHz PHY, MAC and HDMI PAL**

*Technologies de l'information — Téléinformatique — PHY, MAC et
HDMI PAL 60 GHz à haut débit*

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

This document is a preview generated by EVS



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	xii
Introduction	xiii
1 Scope	1
2 Conformance	1
3 Normative references	1
4 Terms and definitions	1
5 Notational conventions	4
6 Abbreviations and acronyms	4
7 General description (informative)	7
7.1 PHY general description	7
7.2 MAC general description	8
7.2.1 General description of the architecture	8
7.2.2 Device address	8
7.2.3 Features assumed from the PHY	8
7.2.4 Overview of MAC service functionality	9
7.2.5 MAC policies	12
7.2.6 Support for higher-layer timer synchronization	12
7.3 MUX general description	13
7.4 HDMI PAL description	13
8 PHY layer (informative)	13
9 Description of signal	13
9.1 Mathematical framework for SCBT, OFDM, DBPSK, QPSK, UEP-QPSK, OOK and 4ASK	13
9.2 Mathematical framework for the narrow band section of the discovery mode preamble	14
9.3 Mathematical framework for DAMI	14
10 PLCP sublayer	15
10.1 General PPDU frame format	15
10.1.1 PLCP preamble	17
10.1.2 PLCP header	17
10.1.3 PPDU payload	20
10.1.4 Antenna training sequence	21
10.2 Type A PPDU	21
10.2.1 Mode dependent parameters	21
10.2.2 SCBT	22
10.2.3 OFDM	43

10.2.4 Constellation mapping	61
10.2.5 Discovery mode	70
10.3 Type B PPDU	72
10.3.1 Mode dependent parameters	72
10.3.2 Single carrier (DBPSK, DQPSK, UEP-QPSK)	72
10.3.3 Dual alternate mark inversion (DAMI)	80
10.3.4 Channel bonding	83
10.3.5 Discovery mode	83
10.4 Type C PPDU	83
10.4.1 Mode dependent parameters	84
10.4.2 Timing related parameters	84
10.4.3 Frame related parameters	84
10.4.4 PLCP preamble	85
10.4.5 PLCP header	86
10.4.6 PPDU payload	87
11 General requirements	91
11.1 Operating band frequencies	91
11.1.1 Operating frequency range	91
11.1.2 Channel numbering	92
11.2 PHY layer timing	93
11.2.1 Receive-to-transmit turnaround time	94
11.2.2 Transmit-to-receive turnaround time	94
11.2.3 Time between successive transmissions	94
12 Transmitter specifications	94
12.1 Transmit PSD mask	94
12.1.1 Transmit PSD: Type A and Type B	94
12.1.2 Transmit PSD: Type C	95
12.2 Transmit centre frequency tolerance	96
12.3 Symbol clock frequency tolerance	96
12.4 Clock synchronization	97
12.5 Transmit power control	97
12.6 Transmitter EVM	97
12.6.1 Type A	97
12.6.2 Type B	100
12.6.3 Type C	100
13 Receiver specification	101
13.1 Type A device	101
13.1.1 SCBT receiver sensitivity	101
13.1.2 OFDM receiver sensitivity	102
13.2 Type B device receiver sensitivity	103
13.3 Type C device receiver sensitivity	103
13.4 Receiver CCA performance	103

14 MAC frame formats	103
14.1 Frame format conventions	103
14.1.1 Figures	103
14.1.2 Octet order	104
14.1.3 Encoding	104
14.2 General MAC frame format	104
14.2.1 Unaggregated MAC frame	104
14.2.2 Aggregated MAC frame	105
14.2.3 Frame control	106
14.2.4 DestAddr	107
14.2.5 SrcAddr	107
14.2.6 Sequence control	107
14.2.7 Access information	108
14.2.8 Frame payload	108
14.2.9 FCS	109
14.3 Beacon frames	110
14.4 Control frames	112
14.4.1 Immediate acknowledgement (Imm-ACK)	113
14.4.2 Block acknowledgement (BACK)	113
14.4.3 Application-specific	114
14.4.4 B-Poll	114
14.4.5 B-Poll response frame	115
14.4.6 ATTP control frames	115
14.5 Command frames	116
14.5.1 DRP reservation request	117
14.5.2 DRP reservation response	117
14.5.3 Channel selection	117
14.5.4 Link feedback	119
14.5.5 Probe	122
14.5.6 Pairwise temporal key (PTK)	122
14.5.7 Group temporal key (GTK)	123
14.5.8 Application-specific	124
14.5.9 Relay	124
14.5.10 Transmit switched diversity (TSD) request	124
14.5.11 Transmit switched diversity (TSD) set response	125
14.5.12 Transmit switched diversity (TSD) switch	126
14.5.13 Fast uplink channel allocation (FUCA)	126
14.6 Data frames	126
14.7 Information elements	126
14.7.1 Application-specific IE (ASIE)	128
14.7.2 Application-specific probe IE	129
14.7.3 ATTP IE	129
14.7.4 Beacon period occupancy IE (BPOIE)	131
14.7.5 Channel bonding IE (CBOIE)	133
14.7.6 Channel change IE	134

14.7.7 CTR description IE	134
14.7.8 Distributed reservation protocol (DRP) IE	135
14.7.9 DRP availability IE	137
14.7.10 Hibernation anchor IE	137
14.7.11 Hibernation mode IE	138
14.7.12 Identification IE	138
14.7.13 Link feedback IE	139
14.7.14 MAC capabilities IE	141
14.7.15 Master key identifier (MKID) IE	142
14.7.16 MSP interval change IE	142
14.7.17 MSP timing IE	142
14.7.18 Multicast address binding (MAB) IE	142
14.7.19 PHY capabilities IE	143
14.7.20 Probe IE	146
14.7.21 Relinquish request IE	146
14.7.22 Relay IE	147
14.7.23 Scan Countdown IE	149
14.7.24 Scan Timing IE	150
14.7.25 UEP information IE	150
14.8 Master-slave operation command	151
14.8.1 Type C poll	152
14.8.2 Type C poll response	153
14.8.3 Association request command	153
14.8.4 Association response command	154
14.8.5 MSPr services command	154
14.8.6 Disassociation request command	155
14.8.7 Channel time request command	155
14.8.8 Channel time response command	155
14.8.9 Channel time termination command	156
14.8.10 Channel time modify request	156
14.8.11 Channel time modification response command	157
14.8.12 Remote scan request command	157
14.8.13 Remote scan response command	158
14.8.14 Channel release request command	158
14.8.15 Application specific command	159
15 MAC sublayer functional description	159
15.1 Frame processing	159
15.1.1 Frame addresses	160
15.1.2 Frame reception	160
15.1.3 Antenna training frame transaction	160
15.1.4 Frame transfer	161
15.1.5 Frame retry	161
15.1.6 Inter-frame space (IFS)	162
15.1.7 Duplicate detection	162

This document is a preview generated by EVS

15.1.8 RTT/CTT use	162
15.1.9 MAC header fields	162
15.1.10 Information elements	164
15.2 Distributed contention access (DCA)	166
15.2.1 DCA medium availability	167
15.2.2 NAV	167
15.2.3 Medium status	167
15.2.4 Obtaining a TXOP	167
15.2.5 Using a TXOP	168
15.2.6 Invoking a backoff procedure	169
15.2.7 Decrementing a backoff counter	169
15.3 Device discovery	170
15.3.1 Type A	170
15.3.2 Type B	170
15.3.3 Type C	171
15.4 Channel selection	171
15.4.1 Explicit channel selection	172
15.4.2 Implicit channel selection	172
15.5 Transmission and reception of beacons and poll frames	173
15.5.1 Transmission of beacons in the discovery channel	173
15.5.2 Transmission and reception of mode-A0 beacon frames	176
15.5.3 Transmission and reception of mode-B0 beacon frames	177
15.5.4 Transmission and reception of Type C poll frames	177
15.5.5 Superframe	178
15.6 Distributed reservation protocol (DRP)	182
15.6.1 Reservation type	183
15.6.2 Reservation waveform	184
15.6.3 DRP availability IE	184
15.6.4 DRP reservation negotiation	184
15.6.5 DRP reservation announcements	186
15.6.6 Resolution of DRP reservation conflicts	186
15.6.7 BPST realignment and existing DRP reservations	187
15.6.8 Modification and termination of existing DRP reservations	187
15.6.9 Retransmit procedures in DRP reservations	188
15.7 Coexistence and interoperability	188
15.7.1 Coexistence	188
15.7.2 Interoperability	189
15.8 Synchronization of devices	190
15.8.1 Clock accuracy	190
15.8.2 Synchronization for devices in hibernation mode	191
15.8.3 Guard times	191
15.9 Fragmentation and reassembly	192
15.10 Aggregation	192
15.11 Channel bonding	194
15.12 Acknowledgement policies	195

15.12.1 No-ACK	195
15.12.2 Immediate ACK	195
15.12.3 Block ACK	195
15.13 Probe	197
15.14 Multi-rate support	198
15.15 Transmit power control (TPC)	198
15.16 Power management mechanisms	198
15.16.1 Power management modes	198
15.16.2 Power state transitions at active mode	199
15.16.3 Hibernation mode operation for Type A/B devices	201
15.16.4 Hibernation mode operation for Type C device	202
15.16.5 Hibernation anchor operation in Type A/B devices	202
15.17 ASIE operation	203
15.18 The antenna training and tracking protocol (ATTP)	203
15.18.1 ATTP functional description	204
15.18.2 Antenna training sequence, transmission and frame type	206
15.18.3 Antenna training feedback information	206
15.18.4 Training matrix in closed loop mode	207
15.18.5 Feedback method in closed loop mode	208
15.18.6 No feedback in open loop mode	212
15.18.7 Iterative antenna training	212
15.18.8 Antenna tracking	214
15.19 Master-slave operation	214
15.19.1 Master-slave timing structure	215
15.19.2 Master-slave operation between Type A, Type B and Type C devices	216
15.19.3 Channel scanning	217
15.19.4 Starting a MSPr	218
15.19.5 Terminating a MSPr	218
15.19.6 Association and disassociation	218
15.19.7 Channel access	221
15.19.8 Synchronization	225
15.19.9 Fragmentation and de-fragmentation	227
15.19.10 Acknowledgment and retransmissions	227
15.19.11 Link check	227
15.19.12 Changing MSP parameters	229
15.19.13 Channel release	230
15.20 Transmit switched diversity (TSD) operation	232
15.20.1 TSD initiating procedure	232
15.20.2 Antenna switching	232
15.21 MAC sublayer parameters	233
16 Security	235
16.1 Security mechanisms	235
16.1.1 Security operation	235
16.1.2 4-way handshake	235

16.1.3 Key transport	236
16.1.4 Freshness protection	236
16.1.5 Data encryption	236
16.1.6 Frame integrity protection	236
16.2 Security modes	236
16.2.1 Security mode 0	238
16.2.2 Security mode 1	238
16.2.3 Security mode 2	238
16.3 Temporal keys	238
16.3.1 Mutual authentication and PTK derivation	239
16.3.2 GTK exchange	240
16.3.3 Pseudo-random function (PRF) definition	240
16.3.4 PTK and KCK derivation	241
16.3.5 PTK MIC generation	242
16.3.6 Random number generation	242
16.4 Frame reception steps and replay prevention measures	243
16.4.1 Frame reception	243
16.4.2 Replay prevention	243
16.4.3 Implications on GTKs	244
16.5 AES-128 CCM inputs	244
16.5.1 Overview	244
16.5.2 Nonce	244
16.5.3 CCM blocks	245
16.6 Token authentication	246
16.6.1 Token issuance	246
16.6.2 Token revoke	247
17 HDMI PAL	247
17.1 Introduction	247
17.2 HDMI transmission	248
17.2.1 Identification of video vs. data	248
17.2.2 TMDS removal	248
17.2.3 Data type multiplexing	248
17.3 HDMI reception	251
17.3.1 TMDS encoding	251
17.3.2 Packet demultiplexing	251
17.4 PAL header format	255
17.4.1 Sub-packet header	256
17.5 PAL payload format	257
17.6 Block retransmission request	257
17.7 Type specific header fields	258
17.7.1 S-UEP	258
17.7.2 P-UEP	261
17.8 Video/audio format adaptation	262
17.8.1 Fast video format adaptation	262

17.8.2 Fast audio format adaptation	265
17.8.3 Control messages to support fast format adaptation	266
17.9 Fast uplink channel allocation (FUCA)	267
17.9.1 FUCA operation	268
17.9.2 The procedure of data exchange using FUCA	271
18 Out-of-band control channel	272
18.1 OOB operation	273
18.1.1 Ad hoc mode	273
18.1.2 Infrastructure mode	275
18.1.3 Other OOB functions	277
18.2 OOB frame format	278
18.2.1 General frame format	278
18.2.2 OOB-beacon	278
18.2.3 OOB-60GHz capability request	279
18.2.4 OOB-60GHz capability response	279
18.2.5 OOB-interference detection request	280
18.2.6 OOB-interference detection response	280
18.2.7 OOB-channel loss notification	280
18.2.8 OOB-block ACK	281
18.2.9 OOB-probe request	281
18.2.10 OOB-probe response	281
18.3 Convergence MAC sublayer parameters	282
19 Relay operation	282
19.1 Relay path setup	282
19.1.1 Identification of relay capabilities	282
19.1.2 Association with a relay device	282
19.1.3 Antenna training between the source and the destination	282
19.1.4 Antenna training between the source and the relay	282
19.1.5 Antenna training between the relay and the destination	283
19.1.6 Transition to data channel	283
19.2 Data transmission in relay operation	285
19.2.1 DRP reservation for relay operation in data channel	285
19.2.2 Usage of relay device	285
19.2.3 Frame transfer in relay operation	285
19.2.4 Frame reception in relay operation	286
19.2.5 Data exchange using relay device	286
19.2.6 Decision on path change	287
19.2.7 Path Change	287
19.2.8 Relay link feedback via relay device	288
19.2.9 Scan of idle path	289
19.2.10 Operation of relay device	289
Annex A (normative) MUX sublayer	291
Annex B (normative) MAC Policies	293

Annex C (informative) Bibliography	296
Annex D (informative) Higher Layer Synchronization Support.....	297

This document is a preview generated by EVS

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 13156 was prepared by Ecma International (as ECMA-387) and was adopted, under a special "fast-track procedure", by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

This document is a preview generated by EVS

Introduction

This is a standard for a 60 GHz PHY, MAC and HDMI¹ PAL for short range unlicensed communications providing high rate wireless personal area network (including point-to-point) transport for both bulk data transfer and multimedia streaming; addressing usages and applications such as high definition (uncompressed / lightly compressed) AV streaming, access point, wireless docking station, and short range sync-and-go.

The standard defines three device types. All device types coexist and interoperate with each other. None of the types requires presence of another type for its operation.

- Device Type A offers video streaming and WPAN applications in 10 meter range LOS/NLOS multipath environments. It uses high gain trainable antennas. This device type is considered as the 'high end - high performance' device.
- Device Type B offers video and data applications over shorter range (1-3 meters) point to point LOS links with non-trainable antennas. It is considered as the "economy" device and trades off range and NLOS performance in favour of low cost implementation and low power consumption.
- Device Type C is positioned to support data only applications over point to point LOS links at less than 1 meter range with non-trainable antennas and no QoS guarantees. This type is considered a 'bottom end' device providing simplest implementation, lowest cost and lowest power consumption.

Four frequency channels are defined and used by all the three device types. The frequency separation for these channels is 2.160 GHz and the symbol rate on each channel is 1.728 Gsps. All device types follow the same frequency plan defined in the major regulatory domains. The standard supports bonding of two or three adjacent channels. The channel bonding allows achieving higher data rates, or the same data rates while using smaller, more efficient constellations.

A single MAC layer protocol is defined within which Type B and Type C devices support limited functionality supported by their respective PHY layers as illustrated in Figure 1. A multiplexing sublayer (MUX) is defined to enable the coexistence of concurrently active higher layer protocols within a single device.

There is an HDMI PAL defined in the standard which places the 60 GHz wireless solution between the HDMI source and HDMI sink. In the wireless HDMI transmitter, the HDMI TMDS coding is removed prior to wireless transmission. The three HDMI data types (video, control and data) are multiplexed together with the video flagged for unequal error protection (UEP) and data/control flagged for equal error protection (EEP). In the wireless HDMI receiver, the three HDMI data types are demultiplexed prior to reapplying the TMDS coding and sending on to the HDMI data sink.

1. HDMI is the registered trademark of the HDMI LLC.

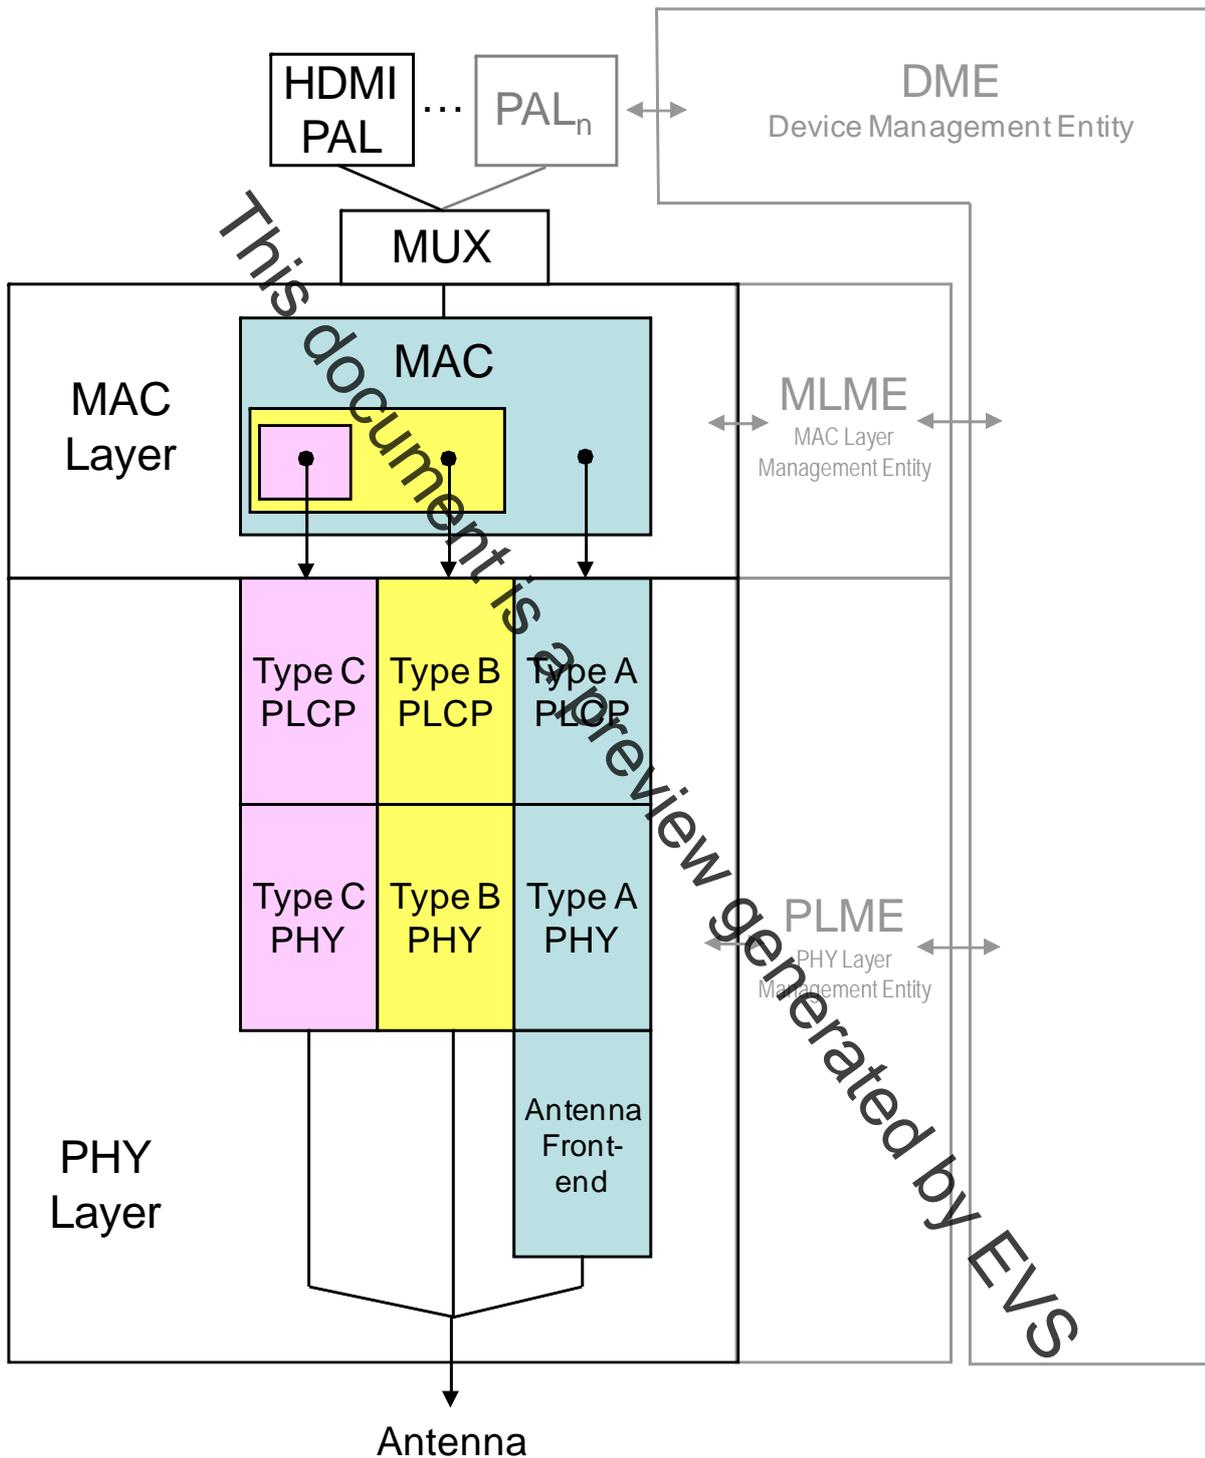


Figure 1 - Protocol structure

NOTE The DME, MLME, PLME, and PALs (except the HDMI PAL) are outside the scope of this standard and all references to these are informative.

Information technology — Telecommunications and information exchange between systems — High rate 60 GHz PHY, MAC and HDMI PAL

1 Scope

This Standard specifies a physical layer (PHY), distributed medium access control (MAC) sublayer, and an HDMI protocol adaptation layer (PAL) for 60 GHz wireless networks.

2 Conformance

Conforming devices of Type A, B or C shall implement the MAC sublayer and the PHY layer and may implement the HDMI PAL as specified herein.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8802-11:2005/Amd. 6, *Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) specifications - Amendment 6: Medium Access Control (MAC) Security Enhancements*

ISO/IEC 10646:2003, *Information technology – Universal Multiple-Octet Coded Character Set (UCS)*

ISO/IEC 18033-3:2005, *Information technology – Security techniques – Encryption algorithms – Part 3: Block ciphers*

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply. For terms and definitions not defined in this Clause, the term and definitions given in IEEE 100, *The Authoritative Dictionary of IEEE Standards Terms*, Seventh Edition apply.

4.1

Beacon Group

BG

set of devices from which a device receives beacons that identify the same beacon period start time (BPST) as the device

4.2

Beacon Period

BP

period of time declared by a device during which it sends or listens for beacons