

Fibre organisers and closures to be used in optical fibre communication systems - Product specifications - Part 2-8: Microduct connectors, for air blown optical fibres, Type 1

This document is a preview generated by EVS

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

Käesolev Eesti standard EVS-EN 50411-2-8:2009 sisaldab Euroopa standardi EN 50411-2-8:2009 ingliskeelset teksti.

Standard on kinnitatud Eesti Standardikeskuse 31.07.2009 käskkirjaga ja jõustub sellekohase teate avaldamisel EVS Teatajas.

Euroopa standardimisorganisatsioonide poolt rahvuslikele liikmetele Euroopa standardi teksti kättesaadavaks tegemise kuupäev on 20.05.2009.

Standard on kättesaadav Eesti standardiorganisatsioonist.

This Estonian standard EVS-EN 50411-2-8:2009 consists of the English text of the European standard EN 50411-2-8:2009.

This standard is ratified with the order of Estonian Centre for Standardisation dated 31.07.2009 and is endorsed with the notification published in the official bulletin of the Estonian national standardisation organisation.

Date of Availability of the European standard text 20.05.2009.

The standard is available from Estonian standardisation organisation.

ICS 33.180.20

Standardite reprodutseerimis- ja levitamiseõigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonilisse süsteemi või edastamine ükskõik millises vormis või millisel teel on keelatud ilma Eesti Standardikeskuse poolt antud kirjaliku loata.

Kui Teil on küsimusi standardite autorikaitse kohta, palun võtke ühendust Eesti Standardikeskusega:
Aru 10 Tallinn 10317 Eesti; www.evs.ee; Telefon: 605 5050; E-post: info@evs.ee

Right to reproduce and distribute Estonian Standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without permission in writing from Estonian Centre for Standardisation.

If you have any questions about standards copyright, please contact Estonian Centre for Standardisation:
Aru str 10 Tallinn 10317 Estonia; www.evs.ee; Phone: +372 605 5050; E-mail: info@evs.ee

**Fibre organisers and closures to be used
in optical fibre communication systems -
Product specifications -
Part 2-8: Microduct connectors, for air blown optical fibres, Type 1**

Organiseurs et boîtiers de fibres à utiliser
dans les systèmes de communication
par fibres optiques -
Spécifications de produits -
Partie 2-8: Connecteurs en microconduits
de Type 1, destinés aux fibres optiques
soufflées à l'air comprimé

LWL-Spleißkassetten und -Muffen
für die Anwendung in LWL-
Kommunikationssystemen -
Produktnormen -
Teil 2-8: ABF-Mikrorohrverbinder,
Bauart 1

This European Standard was approved by CENELEC on 2008-12-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: Avenue Marnix 17, B - 1000 Brussels

Foreword

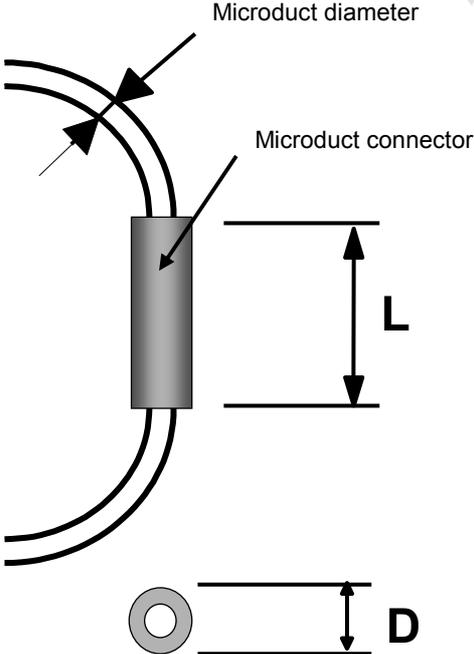
This European Standard was prepared by the Technical Committee CENELEC TC 86BXA, Fibre optic interconnect, passive and connectorised components.

The text of the draft was submitted to the formal vote and was approved by CENELEC as EN 50411-2-8 on 2008-12-01.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2009-12-01
 - latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2011-12-01
-

This document is a preview generated by EVS

Fibre organisers and closures to be used in optical fibre communication systems - Product specifications		
Microduct connectors, for air blown optical fibres, Type 1		
Construction: Tube seals: Connector types:	Sealed microduct connector Cold applied Straight, Straight bulkhead, Reducer, Close down, Liquid block, Liquid block with barb end, End stop and Stem.	Applications: Optical fibre cable networks EN 61753-1
Related documents: EN 61300 series Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series) EN 61753-1 Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1) ETSI EN 300 019 series Environmental Engineering (EE) – Environmental conditions and environmental tests for telecommunications equipment		
Construction: 	Examples 'Straight through' Connector dimensions for non-bulkhead mounting	
	Nominal microduct outside diameter	Diameter or across corners D max. mm
	Length L max. mm	
	3 mm	9
	4 mm	14
	5 mm	15
	6 mm	15
	7 mm	18
	8 mm	20
	10 mm	24
	12 mm	25
	14 mm	29
	15 mm	33
	16 mm	70

Contents

1	Scope	7
1.1	Product identification	7
1.2	Operating environment.....	7
1.3	Reliability	7
1.4	Quality assurance.....	7
1.5	Safety labelling – Warning: need for an ‘over pressure device’ in sealed closures.....	7
2	Normative references	8
3	Definitions and abbreviations	9
3.1	Definitions.....	9
3.2	Abbreviations.....	11
4	Description	11
4.1	Microduct connector housing	11
4.2	Burst pressure.....	15
4.3	Microduct seals	15
4.4	Materials.....	15
4.5	Marking.....	15
5	Variants	16
6	Dimensional requirements	17
6.1	Dimensions diagram	17
6.2	‘Straight’ connectors – Equal microduct	17
6.3	‘Straight bulkhead’ connectors – Equal microduct	18
6.4	‘ID reducer/enlarger stem’ connectors	18
6.5	‘ID reducer/enlarger’ connectors	19
6.6	‘OD reducer/enlarger stem’ connectors	19
6.7	‘OD reducer/enlarger’ connectors	20
6.8	‘ID and OD reducer/enlarger stem’ connectors.....	20
6.9	‘ID and OD reducer/enlarger’ connectors.....	21
6.10	‘Close Down’ connectors.....	21
6.11	‘Liquid Block’ connector.....	22
6.12	‘Liquid Block with barb end’ connectors	22
6.13	‘End Stop’ connectors	22
7	Tests	23
7.1	Sample size	23
7.2	Test sample preparation	23
7.3	Test and measurement methods	24
7.4	Test sequence.....	24
7.5	Pass/fail criteria	24
8	Test report	24
9	Performance requirements	24
9.1	Bend radius	24
9.2	Dimensional and marking requirements.....	24
9.3	Sealing, optical and appearance performance criteria.....	24
9.4	Mechanical sealing performance requirements	26
9.5	Environmental sealing performance requirements.....	28

Annex A (informative) **Sample size and product sourcing requirements**.....30
Annex B (informative) **Air blown fibre microduct – Mean outside diameter range**.....31
Annex C (normative) **Test method – High pressure resistance – Safety**.....32
Annex D (normative) **Test method – Installation**33
Annex E (normative) **Test method – Insertion force**.....34
Bibliography35

Figures

Figure 1 – Fibre flow impedance 11
Figure 2 – Fibre flow impedance – Both direction step..... 11
Figure 3 – Fibre flow impedance – One direction step 12
Figure 4 – Fibre flow impedance – Acute angled step..... 12
Figure 5 – ‘Typical’ connector elements – Cross sectional view..... 13
Figure 6 – ‘Straight’ – Equal microduct outside diameters 13
Figure 7 – ‘Straight bulkhead’ – Equal microduct outside diameters..... 13
Figure 8 – ‘ID reducer/enlarger stem’– Unequal microducts with a different ID ‘OD reducer/enlarger stem’ – Unequal microducts with a different OD ‘ID and OD reducer/enlarger stem’ – Unequal microducts with a different ID and OD 13
Figure 9 – ‘ID reducer/enlarger’ – Unequal microducts with a different ID ‘OD reducer/enlarger’ – Unequal microducts with a different OD ‘ID and OD reducer/enlarger’ – Unequal microducts with a different ID and OD 14
Figure 10 – Close down assembly access for blowing head equipment 14
Figure 11 – Liquid block transition point to stop liquid migration 14
Figure 12 – Liquid block with a barb end transition point to stop liquid migration..... 14
Figure 13 – End stop..... 14
Figure 14 – Microduct interconnection geometry..... 15
Figure 15 – Microduct connector overall dimensions 17
Figure 16 – Sealing performance test sample (tank to source).....23
Figure 17 – Optical test chamber – Liquid block connectors (only).....24
Figure E.1 – Test apparatus for insertion force method34

Tables

Table 1 – Micro-duct connector – Variants EN 50411-2-8 – XXX/XXX ₁ - XXX/XXX ₂ – XXX ₃ – X ₄	16
Table 2 – ‘Straight’ connector design – Maximum dimensions	17
Table 3 – ‘Straight bulkhead’ connector – Maximum dimensions	18
Table 4 – ‘ID reducer/enlarger stem’ connector – Maximum dimensions	18
Table 5 – ‘ID reducer/enlarger’ connector – Maximum dimensions	19
Table 6 – ‘OD reducer/enlarger stem’ connector – Maximum dimensions.....	19
Table 7 – ‘OD reducer/enlarger’ connector – Maximum dimensions	20
Table 8 – ‘ID and OD reducer/enlarger stem’ connector – Maximum dimensions	20
Table 9 – ‘ID and OD reducer/enlarger’ connector – Maximum dimensions	21
Table 10 – ‘Close Down’ connector – Maximum dimensions	21
Table 11 – ‘Liquid Block’ connectors – Maximum dimensions	22
Table 12 – ‘Liquid Block with barb end’ connectors - Maximum dimensions	22
Table 13 – ‘End Stop’ connector.....	22
Table 14 – Tightness, optical and appearance performance criteria.....	25
Table 15 – Mechanical requirements.....	26
Table 16 – Environmental sealing performance requirements	28
Table A.1 – Minimum sample size requirements.....	30
Table B.1 – Air blown fibre microduct – Mean outside diameter range	31

Preview generated by EVS

1 Scope

1.1 Product identification

This specification contains the initial, start of life dimensional, optical, mechanical and environmental performance requirements of a fully installed blown fibre 'microduct' connector in order for it to be categorised as an EN standard product.

This product specification covers the following 'microduct connectors' to suit a wide range of blown fibre applications, for floating or fixed:

- joining the same size microduct, or different sizes of microduct;
- joining same size protected microduct, to same or different size of microduct or protected microduct;
- disconnection of the connector to gain access, for example, to insert blowing equipment;
- a means to seal the fibre inside the connector to prevent the flow of liquids;
- close off open-ended microducts.

This product specification covers blown fibre microduct connectors for use in 'sub-ducts or protected micro-duct cable closures' as specified in EN 50411-2-5 for use in outside environments, and for both sealed and non-sealed closures. The outside environment includes both subterranean (underground) and/or aerial applications.

This document includes reducer/enlarger products. It may not be possible to blow through these devices. Manual feeding may be required because of the pressure gradient step.

This product specification does not apply to microduct connectors for use in direct sunlight.

1.2 Operating environment

The tests selected, combined with the severity and duration, are representative of an outside plant environment for both subterranean and aerial environments defined by

- ETSI EN 300 019 series: class 8.1: underground locations,
- EN 61753-1: all categories.

1.3 Reliability

Whilst the anticipated service life expectancy of the product in these environments is 20 years, compliance with this specification does not guarantee the reliability of the product. This should be predicted using a recognised reliability assessment programme.

1.4 Quality assurance

Compliance with this specification does not guarantee the manufacturing consistency of the product. This should be maintained using a recognised quality assurance programme.

1.5 Safety labelling – Warning: need for an 'over pressure device' in sealed closures

All air blown fibre connectors, supplied to this standard, must have a warning on the product or packaging to read as follows:

Where the air blown fibre connector is installed inside a sealed airtight closure or housing, the closure must be able to be fitted with an over pressure safety system that is able to exhaust air to atmospheric pressure.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50411-2-5	Fibre organisers and closures to be used in optical fibre communication systems – Product specifications – Part 2-5: Sealed closures for air blown fibre microduct, type 1, for category S & A
EN 60793-1-40:2003	Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation (IEC 60793-1-40:2001, mod.)
EN 60794-1-2:2003	Optical fibre cables – Part 1-2: Generic specification – Basic optical cable test procedures (IEC 60794-1-2:2003)
EN 60794-5 series	Optical fibre cables – Part 5: Sectional specification – Microduct cabling for installation by blowing (IEC 60794-5 series)
EN 61300 series	Fibre optic interconnecting devices and passive components – Basic test and measurement procedures (IEC 61300 series)
EN 61300-2-1	Part 2-1: Tests – Vibration (sinusoidal) (IEC 61300-2-1)
EN 61300-2-4	Part 2-4: Tests – Fibre/cable retention (IEC 61300-2-4)
EN 61300-2-5	Part 2-5: Tests – Torsion/twist (IEC 61300-2-5)
EN 61300-2-10	Part 2-10: Tests – Crush resistance (IEC 61300-2-10)
EN 61300-2-22	Part 2-22: Tests – Change of temperature (IEC 61300-2-22)
EN 61300-2-23:1997	Part 2-23: Tests – Sealing for non-pressurized closures of fibre optic devices (IEC 61300-2-23:1995)
EN 61300-2-26	Part 2-26: Tests – Salt mist (IEC 61300-2-26)
EN 61300-2-33	Part 2-33: Tests – Assembly and disassembly of fibre optic closures (IEC 61300-2-33)
EN 61300-2-34	Part 2-34: Tests – Resistance to solvents and contaminating fluids (IEC 61300-2-34)
EN 61300-2-37	Part 2-37: Tests – Cable bending for fibre optic closures (IEC 61300-2-37)
EN 61300-2-38:2006	Part 2-38: Tests – Sealing for pressurized fibre optic closures (IEC 61300-2-38:2006)
EN 61300-3-1	Part 3-1: Examinations and measurements – Visual examination (IEC 61300-3-1)
EN 61300-3-3	Part 3-3: Examinations and measurements – Active monitoring of changes in attenuation and return loss (IEC 61300-3-3)
EN 61753-1	Fibre optic interconnecting devices and passive components performance standard – Part 1: General and guidance for performance standards (IEC 61753-1)
ETSI EN 300 019 series	Equipment Engineering (EE) – Environmental conditions and environmental tests for telecommunications equipment
ISO 1998-1	Petroleum industry – Terminology – Part 1: Raw materials and products
EN 590	Automotive fuels – Diesel – Requirements and test methods