Gas cylinders - Cylinder valves with integrated pressure regulators - Specification and type testing

Gas cylinders - Cylinder valves with integrated pressure regulators - Specification and type testing



EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

| Käesolev dokument on jõustatud | This document is endorsed on 22.11.2007 |
|---|---|
| 22.11.2007 ja selle kohta on avaldatud | with the notification being published in the |
| teade Eesti standardiorganisatsiooni | official publication of the Estonian national |
| ametlikus väljaandes. | standardisation organisation. |
| Standard on kättesaadav Eesti | The standard is available from Estonian |
| standardiorganisatsioonist. | standardisation organisation. |
| Käsitlusala: | Scope: |
| This International Standard applies to | This International Standard applies to |
| cylinder valves with integrated pressure | cylinder valves with integrated pressure |
| regulators (VIPR) intended to be fitted to | regulators (VIPR) intended to be fitted to |
| gas cylinders that convey compressed, | gas cylinders that convey compressed, |
| liquefied or dissolved gases. This | liquefied or dissolved gases. This |
| International Standard is not intended for | International Standard is not intended for |
| medical applications (see ISO 10524-3). | medical applications (see ISO 10524-3). |
| Further, additional specific requirements | Further, additional specific requirements |
| for valves fitted with safety valves and | for valves fitted with safety valves and |
| bursting discs (see EN 14513) and for | bursting discs (see EN 14513) and for |
| valves fitted with residual pressure valves | valves fitted with residual pressure valves |
| (see ISO 15996) are not covered by this | (see ISO 15996) are not covered by this |
| International Standard. | International Standard. |
| ICS 23.020.30 Võtmesõnad: | |

EUROPEAN STANDARD NORME EUROPÉENNE **EUROPÄISCHE NORM**

EN ISO 22435

September 2007

ICS 23.020.30

English Version

Gas cylinders - Cylinder valves with integrated pressure regulators - Specification and type testing (ISO 22435:2007)


Bouteilles à gaz - Robinets de bouteilles avec détendeur intégré - Spécifications et essais de type (ISO 22435:2007) Gasflaschen - Druckminderer in Flaschenventilen -Allgemeine Anforderungen und Typprüfung (ISO 22435:2007)

This European Standard was approved by CEN on 6 July 2007.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

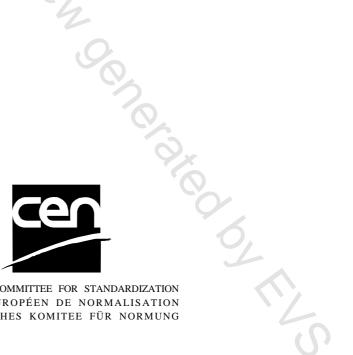

EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

© 2007 CEN All rights of exploitation in any form and by any means reserved worldwide for CEN national Members.

Ref. No. EN ISO 22435:2007: E

| Contents | Page |
|----------|------|
| Foreword | 3 |
| Foreword | |
| 2 | |

Foreword

This document (EN ISO 22435:2007) has been prepared by Technical Committee ISO/TC 58 "Gas cylinders" in collaboration with Technical Committee CEN/TC 23 "Transportable gas cylinders", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2008, and conflicting national standards shall be withdrawn at the latest by March 2008.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 22435:2007 has been approved by CEN as a EN ISO 22435:2007 without any modification.

ad by . With the constant of t

INTERNATIONAL STANDARD



First edition 2007-09-01

Gas cylinders — Cylinder valves with integrated pressure regulators -Specification and type testing

silles income de la constant income de la c Bouteilles à gaz — Robinets de bouteilles avec détendeur intégré —



Reference number ISO 22435:2007(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

<text> Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Contents

Page

| Forew | vord | v |
|--------|---|--------|
| Introd | luction | vi |
| 1 | Scope | 1 |
| 2 | Normative references | 1 |
| 3 | Terms and definitions | 2 |
| 4 | Symbols and terminology | 4 |
| 5 | Design requirements | |
| 5.1 | General | |
| 5.2 | Description | 5 |
| 5.3 | Materials | 5 |
| 5.4 | Pressure indicators | 6 |
| 5.5 | Filling connection | 6 |
| 5.6 | Cylinder connection | 6 |
| 5.7 | Outlet connection | |
| 5.8 | Outlet pressure for acetylene | - |
| 5.9 | Flow control valve (flow controller) | |
| 5.10 | Pressure adjusting device | |
| 5.11 | Filtration | |
| 5.12 | Main shut-off valve | |
| 5.13 | Flow and pressure performance for regulators without flow metering devices | |
| 5.14 | Pressure relief valve | , 8 |
| 5.15 | Leakage | |
| 5.16 | Mechanical strength | |
| 5.17 | Resistance to ignition | |
| 5.17 | Requirement for VIPR with flow metering devices | |
| 5.10 | Constructional requirements | |
| 5.19 | Valve operating device | |
| | Test methods | |
| 6 | | |
| 6.1 | General | |
| 6.2 | Documentation | |
| 6.3 | Number of test samples | 11 |
| 6.4 | Test sequence | |
| 6.5 | Test method for mechanical strength | 13 |
| 6.6 | Test methods for flow and pressure performance for regulators without flow metering | |
| | devices | 13 |
| 6.7 | Test method for relief valve | |
| 6.8 | Pressure retention of the low-pressure side of the pressure regulator | |
| 6.9 | Test method for flowmeter mechanical strength | 22 |
| 6.10 | Test method for accuracy of VIPR with flowmeter | |
| 6.11 | Test method for accuracy of VIPR with flowmeter and with fixed orifices | 22 |
| 6.12 | Test methods for leakage | 22 |
| 6.13 | Test method for operating and loosening torques | |
| 6.14 | Test method for endurance of the main shut-off mechanism | |
| 6.15 | Test method for endurance of the non-return valve | |
| 6.16 | Test method for ignition | |
| 6.17 | Test method for resistance to acetylene decomposition | |
| 6.18 | Test method for flame resistance of the valve operating device | |
| | | |
| 7 | Marking | 29 |

| | Valve impact test) Endurance test | |
|---|------------------------------------|--------------|
| | | |
| 5 | Bocument is a Drewiew Oenerated by | |
| | | |
| 1 | © ISO 2007 – All rig | hts reserved |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 22435 was prepared by Technical Committee ISO/TC 58, Gas cylinders, Subcommittee SC 2, Cylinder fittings.

Introduction

Cylinder valves with integrated pressure regulators are used to reduce the high cylinder pressure to a lower pressure suitable for use.

These functions cover a wide range of inlet and outlet pressures and flows which require specific design characteristics. It is important that the operating characteristics of these valves be specified and tested in a defined manner.

Such valves are more complicated than conventional cylinder valves yet subject to the same environmental and transportation conditions. These conditions should be borne in mind at the design and development stage.

This International Standard pays particular attention to

- suitability of materials,
- safety (mechanical strength, safe relief of excess pressure and resistance to ignition),
- gas-specificity,
- cleanliness.
- testing,
- identification, and
- information supplied.

Gas cylinders — Cylinder valves with integrated pressure regulators — Specification and type testing

1 Scope

This International Standard applies to cylinder valves with integrated pressure regulators (VIPR) intended to be fitted to gas cylinders that convey compressed, liquefied or dissolved gases.

This International Standard is not intended for medical applications (see ISO 10524-3). Further, additional specific requirements for valves fitted with safety valves and bursting discs (see EN 14513) and for valves fitted with residual pressure valves (see ISO 15996) are not covered by this International Standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2503:1998, Gas welding equipment — Pressure regulators for gas cylinders used in welding, cutting and allied processes up to 300 bar

ISO 3253, Gas welding equipment — Hose connections for equipment for welding, cutting and allied processes

ISO 5145, Cylinder valve outlets for gases and gas mixtures — Selection and dimensioning

ISO 5171, Pressure gauges used in welding, cutting and allied processes

ISO 7289, Quick-action couplings with shut-off valves for gas welding, cutting and allied processes

ISO 7291:1999, Gas welding equipment — Pressure regulators for manifold systems used in welding, cutting and allied processes up to 300 bar

ISO/TR 7470, Valve outlets for gas cylinders — List of provisions which are either standardized or in use

ISO 9090, Gas tightness of equipment for gas welding and allied processes

ISO 10156, Gases and gas mixtures — Determination of fire potential and oxidizing ability for the selection of cylinder valve outlets

ISO 10920, Gas cylinders — 25E taper thread for connection of valves to gas cylinders — Specification

ISO 11114-1, *Transportable gas cylinders* — *Compatibility of cylinder and valve materials with gas contents* — *Part 1: Metallic materials*

ISO 11114-2, Transportable gas cylinders — Compatibility of cylinder and valve materials with gas contents — Part 2: Non-metallic materials

ISO 11114-3, Transportable gas cylinders — Compatibility of cylinder and valve materials with gas contents — Part 3: Autogenous ignition test in oxygen atmosphere

ISO 11117, Gas cylinders — Valve protection caps and valve guards for industrial and medical gas cylinders — Design, construction and tests

ISO 13341, Transportable gas cylinders — Fitting of valves to gas cylinders

ISO 15001, Anaesthetic and respiratory equipment — Compatibility with oxygen

ISO 15996, Gas cylinders — Residual pressure valves — General requirements and type testing

EN 13918, Gas welding equipment — Integrated flowmeter regulators used on cylinders for welding, cutting and allied processes — Classification, specification and tests

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

adjustable pressure regulator

device that has been provided with a means of operator adjustment of the delivery pressure under normal use

3.2

closure pressure

 P_4

stabilized outlet pressure, one minute after cessation of the flow, from a pressure regulator by which the flow has been set to a standard discharge

3.3

cylinder valve with integrated pressure regulator

VIPR

device intended to be permanently fitted to a gas cylinder connection and comprising a shut-off valve system and pressure reduction system

3.4

filling port

point on the device through which the cylinder is filled

3.5

flow characteristic

variation of the outlet pressure in relation to the rate of flow from zero to maximum capacity flow of the pressure regulator with the inlet pressure remaining constant

3.6

flow gauge

device that measures pressure and that is calibrated in units of flow

3.7

flowmeter

device that measures and indicates the flow of a specific gas or gas mixture

3.8

hysteresis

lagging of the outlet pressure (effect) when the flow (cause) is varied so that at a constant inlet pressure the values of outlet pressure measured with increasing flow do not coincide with the values of outlet pressure measured with decreasing flow