Petroleum and natural gas industries - Glass-reinforced plastics (GRP) piping - Part 1: Vocabulary, symbols, applications and materials (ISO 14692-1:2017)



EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

| See Eesti standard EVS-EN ISO 14692-1:2017 sisaldab Euroopa standardi EN ISO 14692-1:2017 ingliskeelset teksti. | This Estonian standard EVS-EN ISO 14692-1:2017 consists of the English text of the European standard EN ISO 14692-1:2017. |
|---|--|
| Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas. | This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation. |
| Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 13.09.2017. | Date of Availability of the European standard is 13.09.2017. |
| Standard on kättesaadav Eesti Standardikeskusest. | The standard is available from the Estonian Centre for Standardisation. |

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile <u>standardiosakond@evs.ee</u>.

ICS 75.200, 83.140.30

Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega: Koduleht <u>www.evs.ee</u>; telefon 605 5050; e-post <u>info@evs.ee</u>

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:

Homepage www.evs.ee; phone +372 605 5050; e-mail info@evs.ee

EUROPEAN STANDARD NORME EUROPÉENNE

EN ISO 14692-1

EUROPÄISCHE NORM September 2017

ICS 75.200; 83.140.30

Supersedes EN ISO 14692-1:2002

English Version

Petroleum and natural gas industries - Glass-reinforced plastics (GRP) piping - Part 1: Vocabulary, symbols, applications and materials (ISO 14692-1:2017)

Industries du pétrole et du gaz naturel - Canalisations en plastique renforcé de verre (PRV) - Partie 1: Vocabulaire, symboles, applications et matériaux (ISO 14692-1:2017) Erdöl- und Erdgasindustrie - Glasfaserverstärkte Kunststoffrohrleitungen (GFK) - Teil 1: Begriffe, Symbole, Anwendungen und Werkstoffe (ISO 14692-1:2017)

This European Standard was approved by CEN on 22 June 2017.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

European foreword

This document (EN ISO 14692-1:2017) has been prepared by Technical Committee ISO/TC 67 "Materials, equipment and offshore structures for petroleum, petrochemical and natural gas industries" in collaboration with Technical Committee CEN/TC 12 "Materials, equipment and offshore structures for petroleum, petrochemical and natural gas industries" the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2018 and conflicting national standards shall be withdrawn at the latest by March 2018.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 14692-1:2002.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 14692-1:2017 has been approved by CEN as EN ISO 14692-1:2017 without any modification.

| ents | | Page |
|-------------------|--|---|
| ord | | iv |
| iction | | v |
| Scope | | 1 |
| Normative | e references | 2 |
| Terms, de | finitions, symbols and abbreviated terms | 2 |
| | | |
| 4.1 <i>MPI</i> | $R_{ m XX}$ | 22 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| , | | |
| 5.1. | | |
| 5.2 Res | in matrix | 26 |
| Materials. | | 27 |
| Dimensio | ns | 28 |
| A (informa | itive) Principle | 30 |
| | | |
| C (normati | ive) Enquiry sheet | 37 |
| D (normati | ive) Wall thickness definitions | 40 |
| | | |
| | | |
| ranhv | | |
| | | |
| | Normative Ferms, des 4.1 MP 4.2 Par 4.2. 4.2. 4.2. 4.2. 5.1 Join 5.1. 5.1 Res Materials Dimension A (informa B (informa C (normati D (normati E (informa | Normative references Ferms, definitions, symbols and abbreviated terms Pressure rating 4.1 MPR _{xx} 4.2 Part factors and partial factors 4.2.1 Part factor f ₂ for loading 4.2.2 Part factor f _{3,est} for the limited axial load capability of GRP piping 4.2.3 Partial factor A ₀ for design life 4.2.4 Partial factor A ₂ for chemical resistance 4.2.5 Partial factor A ₃ for cyclic loading Classification 5.1 Joints 5.1.1 Unrestrained joints 5.1.2 Classification of joints |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 67, *Materials, equipment and offshore structures for petroleum, petrochemical and natural gas industries,* Subcommittee SC 6, *Processing equipment and systems.*

This second edition cancels and replaces the first edition (ISO 14692-1:2002), which has been technically revised.

A list of all parts of ISO 14692 can be found on the ISO website.

Introduction

0.1 General

The objective of ISO 14692 (all parts) is to provide the oil and gas industry, as well as the supporting engineering and manufacturing industry, with mutually agreed specifications and recommended practices for the purchase, qualification, manufacturing, design, handling, storage, installation, commissioning and operation of GRP piping systems.

This document, provides guidance in the use and interpretation of the other parts of ISO 14692. This document contains the following annexes:

- Annex A (informative) explaining the principle;
- Annex B (informative) providing guidance on scope limitations;
- Annex C (normative) containing the enquiry sheet;
- Annex D (normative) providing wall thickness definitions;
- Annex E (informative) describing selection of part factor $f_{3,est}$ in bid process;
- Annex F (informative) containing a worked example.

0.2 Basic steps in use of ISO 14692 (all parts)

<u>Figure 1</u> identifies the eight basic steps involved in the use of ISO 14692 (all parts) that are further explained below.

Step 1: The bid process. The principal completes an enquiry sheet (see Annex C) that defines the design pressures and temperatures of the piping system as well as the application, required pipe sizes and required components (bends, tees, reducers, flanges, etc.). The principal also verifies that the scope of the application is within the limits of ISO 14692 (all parts) (see Annex B). The principal and manufacturer also comes to an agreement on the value of the estimated value of the part factor $f_{3,est}$ (see Annex E).

In some cases, the manufacturer can wish to offer a product that 1) meets or exceeds the requirements in the enquiry sheet and 2) has already been manufactured, qualified and inspected per ISO 14692-2. In this case, Steps 2 through 4 would not need to be repeated.

Step 2: Manufacturer's data. Recognizing that long-term regression testing can easily take two or more years to complete, the manufacturer will most likely have already selected target values for MPR $_{\rm XX}$, the long-term envelope(s) and the minimum reinforced wall thicknesses. The manufacturer determines the appropriate gradient and rd $_{1\,000,{\rm XX}}$ can then be calculated to suit the survival test duration. Additional basic data such as pipe sizes, wall thicknesses, SIFs, production processes and jointing instructions are also provided.

Step 3: Qualification process. The manufacturer conducts survival tests to qualify the pressure and temperature. If applicable, the manufacturer also qualifies fire performance and electrical conductivity properties. Elastic properties, potable water certification, impact and low temperature performance are also addressed in this step. Just as in Step 2, the manufacturer can have already completed part or all of the qualification process prior to Step 1.

<u>Step 4: Quality programme.</u> The basic requirements for the manufacturer's quality management system are defined.

<u>Step 5: Generate envelopes.</u> This is the first major step in ISO 14692-3. Partial factors and part factors are identified and combinations of these factors are determined. Formulae are then provided to calculate the design envelope(s).

Step 6: Stress analysis. The flexibility factors and SIFs to be used in the stress analysis are identified. The allowable values for vertical deflection, stresses and buckling are also defined. An analytical formula for external pressure is provided.

ent proc

an. field hydrote. Step 7: Bonder training and assessment. This is the first major step in ISO 14692-4 where the bonder training and assessment process is defined.

<u>Step 8: Installation, field hydrotest.</u> This is the last major step where installation issues are addressed.

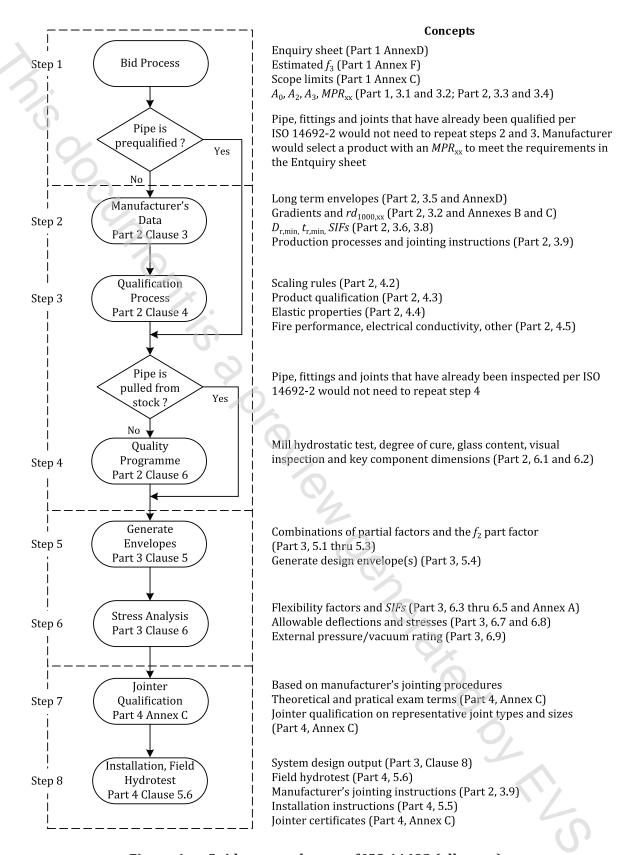


Figure 1 — Guidance on the use of ISO 14692 (all parts)

0.3 Other standards

GRP piping products are used in a wide variety of applications in both industrial and municipal service. For some applications, ISO 14692 (all parts) can be properly considered as the basis for piping and pipeline selection and design. In all applications, the selection of the appropriate standard for any particular application takes into consideration the design life of the project, the service temperature, the corrosive nature of the fluid, whether the intended installation is above ground or buried and what type of joining system is to be used. Depending on the service conditions, other GRP piping standards can be more appropriate and better suited than ISO 14692 (all parts) for the entire or part of the system. This is particularly the case for aqueous applications of both a municipal and industrial nature where the pipelines are generally buried and axial tensile loads are minimal.

Other widely used GRP piping standards include

- ISO 10639.
- ISO 10467.
- API 15HR,
- ASTM D3262-11,
- ASTM D3517-14.
- ASTM D3754-14.
- AWWA C950-07.
- EN 1796:2013, and
- EN 14364:2013.

ISO 14692 (all parts) is not intended to be applied to sewerage and drainage applications, although it can provide useful guidance in specific areas not addressed in alternative standards. ISO 14692 (all parts) is also not specifically intended for non-structural applications such as open drain systems and other low-pressure piping applications.

ISO 14692 (all parts) covers all the main components that form part of a GRP pipeline and piping system (plain pipe, bends, reducers, tees, supports and flanged joints) with the exception of valves and instrumentation.

0.4 Structure of ISO 14692 (all parts)

ISO 14692-2, ISO 14692-3 and ISO 14692-4 follow the individual phases in the life cycle of a GRP piping system, i.e. from qualification and manufacture through design to fabrication, installation, operation and decommissioning.

Each part is therefore aimed at the relevant parties involved in that particular phase.

- ISO 14692-1: Vocabulary, symbols, applications and materials. The scope is presented in <u>Clause 1</u> and it provides guidance in the use of the other three parts of ISO 14692. Main users are envisaged to include all parties in the life cycle of a typical GRP piping system. This document should be used in conjunction with the part of specific relevance.
- ISO 14692-2: Qualification and manufacture. Its objective is to enable the supply of GRP components with known and consistent properties from any source. Main users of the document are envisaged to be the principal, the manufacturer, certifying authorities and government agencies.
- ISO 14692-3: System design. Its objective is to ensure that piping systems, when designed using the components qualified in ISO 14692-2, meet the specified performance requirements. Main users of

the document are envisaged to be the principal, the manufacturer, design contractors, certifying authorities and government agencies.

ISO 14692-4: Fabrication, installation, inspection and maintenance. Its objective is to ensure ed ; 2. Main n/installs. rrnment ages. that installed piping systems meet the specified performance requirements throughout their service life. Main users of the document are envisaged to be the principal, the manufacturer, fabrication/installation contractors, repair and maintenance contractors, certifying authorities

Petroleum and natural gas industries — Glass-reinforced plastics (GRP) piping —

Part 1:

Vocabulary, symbols, applications and materials

1 Scope

This document defines the applications, pressure rating methodology, the classification of the products according to application, type of joint and resin matrix and the limitations to both the materials of construction and the dimensions. It also lists the terms, definitions and symbols used and provides guidance in the use and interpretation of ISO 14692-2, ISO 14692-3 and ISO 14692-4.

ISO 14692 (all parts) is applicable to GRP piping systems that 1) utilize joints that are capable of restraining axial thrust from internal pressure, temperature change and fluid hydrodynamic forces and 2) have a trapezoidal shape for its design envelope. It is primarily intended for offshore applications on both fixed and floating topsides facilities, but it can also be used for the specification, manufacture, testing and installation of GRP piping systems in other similar applications found onshore, e.g. produced-water, firewater systems and general industrial use.

For floating installations, reference is made to the design, construction and certification standards for the hull or vessel, since these can allow alternative codes and standards for GRP piping associated with marine and/or ballast systems. However, it is recommended that ISO 14692 (all parts) be used for such applications to the maximum degree attainable.

ISO 14692 (all parts) can also be used as the general basis for specification of pipe used for pump caissons, stilling tubes, I-tubes, seawater lift risers and other similar items.

Typical oil and gas industry applications for the use of GRP piping and pipelines include those listed in Table 1.

Table 1 — Typical current and potential GRP piping oil and gas applications

| Ballast water | Hydrochloric acid | |
|--|--------------------------------|--|
| Boiler feed water | Inert gas | |
| Brine | Jet-A fuel | |
| Carbon Dioxide (CO ₂) | Natural gas | |
| Chlorine, gas, wet | Oil | |
| Condensate (water and gas) | (Sour) Oil plus associated gas | |
| Cooling water, sweet, brackish, seawater | Potable water | |
| Demineralised water | Process water | |
| Diesel fuel | Produced water | |
| Drains | Seawater | |
| Emulsions (water-oil-gas mixtures) | Service water | |
| Fire water (ring main and wet or dry deluge) | Sewer (grey and red) | |
| Formation water | Sodium hydroxide | |
| | | |

NOTE Some applications, such as wet chlorine gas, hydrogen chloride gas, hydrochloric acid, sodium hydroxide and sodium hypochlorite, require a barrier liner and may require specific corrosion resistant resins. Consult the manufacturer for recommendations.

Table 1 (continued)

| Fresh water | Sodium hypochlorite |
|--|---------------------|
| Fuel | Sour water |
| Gas (methane, etc.) | Unstabilized oil |
| Glycol | Vents |
| Hydrocarbon (with or without associated gas) | Wastewater |
| Hydrogen chloride gas (HCl) | Water disposal |
| Injection water | |

NOTE Some applications, such as wet chlorine gas, hydrogen chloride gas, hydrochloric acid, sodium hydroxide and sodium hypochlorite, require a barrier liner and may require specific corrosion resistant resins. Consult the manufacturer for recommendations.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14692-2:2017, Petroleum and natural gas industries — Glass-reinforced plastics (GRP) piping — Part 2: Qualification and manufacture

ISO 14692-3:2017, Petroleum and natural gas industries — Glass-reinforced plastics (GRP) piping — Part 3: System design

ISO 14692-4:2017, Petroleum and natural gas industries — Glass-reinforced plastics (GRP) piping — Part 4: Fabrication, installation and operation

3 Terms, definitions, symbols and abbreviated terms

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at http://www.iso.org/obp
- IEC Electropedia: available at http://www.electropedia.org/

3.1 General terms

3.1.1

authority having jurisdiction

third-party organization required to be satisfied with the standard of engineering proficiency and safety of a project

EXAMPLE A classification society, verification body or government regulatory body.

3.1.2

contractor

party which carries out all or part of the design, engineering, procurement, construction and commissioning for a project or operation of a facility

Note 1 to entry: The *principal* (3.1.9) can undertake all or part of the duties of the contractor.

3.1.3

designer

party which carries out all or part of the design for a project or facility