

---

---

**Industrial automation systems and  
integration — Product data representation  
and exchange —**

Part 209:

**Application protocol: Composite and  
metallic structural analysis and related  
design**

*Systèmes d'automatisation industrielle et intégration — Représentation et  
échange de données de produits —*

*Partie 209: Protocole d'application: Analyse structurelle composite et  
métallique et conception associée*



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

This document is a preview generated by EVS

© ISO 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

| <b>Contents</b>   | <b>Page</b> |
|---|-------------|
| 1 Scope .....   | 1           |
| 2 Normative references .....                                      | 3           |
| 3 Terms, definitions and abbreviations .....                      | 5           |
| 3.1 Terms defined in ISO 10303-1 .....                            | 5           |
| 3.2 Terms defined in ISO 10303-11 .....                           | 6           |
| 3.3 Terms defined in ISO 10303-21 .....                           | 6           |
| 3.4 Terms defined in ISO 10303-31 .....                           | 7           |
| 3.5 Terms defined in ISO 10303-42 .....                           | 7           |
| 3.6 Terms defined in ISO 10303-44 .....                           | 8           |
| 3.7 Terms defined in ISO 10303-45 .....                           | 8           |
| 3.8 Terms defined in ISO 10303-104 .....                          | 8           |
| 3.9 Terms defined in ISO 10303-203 .....                          | 9           |
| 3.10 Other terms and definitions .....                            | 9           |
| 3.11 Abbreviations .....  | 10          |
| 4 Information requirements .....                                  | 11          |
| 4.1 Units of functionality .....                                  | 11          |
| 4.1.1 activity_control .....                                      | 12          |
| 4.1.2 advanced_boundary_representation .....                      | 13          |
| 4.1.3 analysis_report .....                                       | 13          |
| 4.1.4 assembly .....  | 13          |
| 4.1.5 authorization .....   | 14          |
| 4.1.6 composite_constituent_representation .....                  | 14          |
| 4.1.7 effectivity .....   | 15          |
| 4.1.8 end_item_identification .....                               | 16          |
| 4.1.9 faceted_boundary_representation .....                       | 16          |
| 4.1.10 fe_analysis_control .....                                  | 16          |
| 4.1.11 fe_analysis_results .....                                  | 17          |
| 4.1.12 fea_model .....  | 18          |
| 4.1.13 manifold_surface_with_topology .....                       | 20          |
| 4.1.14 material .....   | 20          |
| 4.1.15 non_topological_surface_and_wireframe .....                | 21          |
| 4.1.16 part_composite_constituents .....                          | 22          |
| 4.1.17 part_identification .....                                  | 22          |
| 4.1.18 part_laminate_table .....                                  | 23          |
| 4.1.19 part_shape .....   | 24          |
| 4.1.20 wireframe_with_topology .....                              | 24          |
| 4.1.21 zone_composite_constituents_and_their_representation ..... | 24          |
| 4.2 Application objects .....                                     | 26          |
| 4.3 Application assertions .....                                  | 117         |
| 5 Application interpreted model .....                             | 151         |
| 5.1 Mapping table .....   | 151         |

**ISO 10303-209:2001(E)**

|   |     |
|---|-----|
| 5.2 AIM EXPRESS short listing .....   | 352 |
| 6 Conformance Requirements .....  | 445 |
| Annex A (normative) AIM EXPRESS expanded listing .....                                  | 448 |
| Annex B (normative) AIM short names .....   | 640 |
| Annex C (normative) Implementation method specific requirements .....                   | 659 |
| Annex D (normative) Protocol Implementation Conformance Statement (PICS) proforma ..... | 660 |
| Annex E (normative) Information object registration .....                               | 662 |
| E.1 Document identification .....   | 662 |
| E.2 Schema identification .....   | 662 |
| Annex F (informative) Application activity model .....                                  | 663 |
| F.1 Application activity model background .....   | 663 |
| F.2 Information exchange scenario .....   | 664 |
| F.3 Application activity model abbreviations .....                                      | 666 |
| F.4 Application activity model definitions .....  | 667 |
| F.5 Application activity model diagrams .....   | 702 |
| Annex G (informative) Application reference model .....                                 | 747 |
| Annex H (informative) AIM EXPRESS-G .....   | 763 |
| Annex J (informative) Computer-interpretable listings .....                             | 858 |
| Annex K (informative) ARM EXPRESS listing .....   | 859 |
| Bibliography .....  | 879 |
| Index .....   | 880 |
| Figures   |     |
| Figure 1 - Data planning model .....  | xii |
| Figure 2 - Composite_assembly_table .....   | 39  |
| Figure 3 - Discontinuous_fiber_assembly .....   | 46  |
| Figure 4 - Filament_assembly .....  | 60  |
| Figure 5 - Filament_laminate .....  | 61  |
| Figure 6 - Flat_pattern_ply_shape .....   | 63  |
| Figure 7 - Laid_ply_shape .....   | 68  |
| Figure 8 - Ply .....  | 86  |
| Figure 9 - Ply_laminate .....   | 87  |
| Figure 10 - Ply_laminate_table .....  | 89  |

|  |     |
|--|-----|
| Figure 11 - Processed_core .....   | 94  |
| Figure 12 - Projection_method .....  | 98  |
| Figure 13 - Surface_ply_shape .....  | 109 |
| Figure 14 - View_ply_shape .....   | 113 |
| Figure F.1 - PAS-C Suite Concept .....   | 664 |
| Figure F.2 - AP209 scenario from a structural designer's viewpoint .....                   | 665 |
| Figure F.3 - AP209 scenario from an analysis viewpoint .....                               | 667 |
| Figure F.4 - A-0 Develop, procure, build, use and maintain an SP .....                     | 703 |
| Figure F.5 - A0 Develop, procure, build, use and maintain an SP .....                      | 704 |
| Figure F.6 - A2 manage, design, build, and support an SP .....                             | 705 |
| Figure F.7 - A22 design and analyze an SP .....  | 706 |
| Figure F.8 - A223 perform structural part detail design and analysis .....                 | 707 |
| Figure F.9 - A2232 create detail structural part design .....                              | 708 |
| Figure F.10 - A22323 prepare SP models and drawing .....                                   | 709 |
| Figure F.11 - A223232 create SP geometry layouts and models .....                          | 710 |
| Figure F.12 - A2232321 receive and review SP geometry data .....                           | 711 |
| Figure F.13 - A2232322 build SP layouts and models .....                                   | 712 |
| Figure F.14 - A223233 create SP drawing data .....   | 713 |
| Figure F.15 - A2232332 prepare detail SP item drawings .....                               | 714 |
| Figure F.16 - A22323322 prepare SP details .....   | 715 |
| Figure F.17 - A2232332233 create SP data .....   | 716 |
| Figure F.18 - A2232332231 prepare SP composite detail .....                                | 717 |
| Figure F.19 - A22323322316 produce CSP ply stack-up .....                                  | 718 |
| Figure F.20 - A223233223162 create CSP ply tables .....                                    | 719 |
| Figure F.21 - A2232332232 prepare CSP core details .....                                   | 720 |
| Figure F.22 - A22323322322 develop CSP core periphery .....                                | 721 |
| Figure F.23 - A22323322323 Design CPS core thickness, density, and material features ..... | 722 |
| Figure F.24 - A2233 conduct detail SP analysis .....                                       | 723 |
| Figure F.25 - A22335 conduct SP static stress analysis .....                               | 724 |
| Figure F.26 - A223352 conduct SP finite element analysis .....                             | 725 |
| Figure F.27 - A2233521 generate SP finite element models .....                             | 726 |
| Figure F.28 - A22335211 generate SP node geometry .....                                    | 727 |
| Figure F.29 - A22335213 generate and assign SP element attributes .....                    | 728 |
| Figure F.30 - A223352131 generate SP geometric attributes .....                            | 729 |
| Figure F.31 - A2233521311 generate beam geometric attributes .....                         | 730 |
| Figure F.32 - A2233521312 generate contoured panel geometric attributes .....              | 731 |
| Figure F.33 - A2233521313 generate core stiffened panel geometric attributes .....         | 732 |
| Figure F.34 - A223352133 generate/import SP material properties .....                      | 733 |
| Figure F.35 - A2233521334 input SP anisotropic material property matrices .....            | 734 |
| Figure F.36 - A22335213341 input beam anisotropic material property .....                  | 735 |
| Figure F.37 - A22335213342 input contoured panels anisotropic material property .....      | 736 |
| Figure F.38 - A22335213343 input core stiffened panel anisotropic material property .....  | 737 |
| Figure F.39 - A2233522 generate SP FE analysis environment and controls .....              | 738 |
| Figure F.40 - A2233523 perform SP mechanical and thermo-mechanical analysis .....          | 739 |
| Figure F.41 - A2233524 create/document SP internal loads/stress data .....                 | 740 |
| Figure F.42 - A223353 conduct SP detail stress analyses .....                              | 741 |
| Figure F.43 - A2233531 conduct SP static strength analyses .....                           | 742 |
| Figure F.44 - A22335311 conduct beam static strength analysis .....                        | 743 |

|   |     |
|---|-----|
| Figure F.45 - A22335312 conduct panel static strength analysis .....      | 744 |
| Figure F.46 - A2233532 conduct SP fine grid finite element analysis ..... | 745 |
| Figure F.47 - A4 develop and provide SP materials .....                   | 746 |
| Figure G.1 - ARM EXPRESS-G diagram 1 of 15 .....                          | 748 |
| Figure G.2 - ARM EXPRESS-G diagram 2 of 15 .....                          | 749 |
| Figure G.3 - ARM EXPRESS-G diagram 3 of 15 .....                          | 750 |
| Figure G.4 - ARM EXPRESS-G diagram 4 of 15 .....                          | 751 |
| Figure G.5 - ARM EXPRESS-G diagram 5 of 15 .....                          | 752 |
| Figure G.6 - ARM EXPRESS-G diagram 6 of 15 .....                          | 753 |
| Figure G.7 - ARM EXPRESS-G diagram 7 of 15 .....                          | 754 |
| Figure G.8 - ARM EXPRESS-G diagram 8 of 15 .....                          | 755 |
| Figure G.9 - ARM EXPRESS-G diagram 9 of 15 .....                          | 756 |
| Figure G.10 - ARM EXPRESS-G diagram 10 of 15 .....                        | 757 |
| Figure G.11 - ARM EXPRESS-G diagram 11 of 15 .....                        | 758 |
| Figure G.12 - ARM EXPRESS-G diagram 12 of 15 .....                        | 759 |
| Figure G.13 - ARM EXPRESS-G diagram 13 of 15 .....                        | 760 |
| Figure G.14 - ARM EXPRESS-G diagram 14 of 15 .....                        | 761 |
| Figure G.15 - ARM EXPRESS-G diagram 15 of 15 .....                        | 762 |
| Figure H.1 - AIM EXPRESS-G diagram 1 of 94 .....                          | 764 |
| Figure H.2 - AIM EXPRESS-G diagram 2 of 94 .....                          | 765 |
| Figure H.3 - AIM EXPRESS-G diagram 3 of 94 .....                          | 766 |
| Figure H.4 - AIM EXPRESS-G diagram 4 of 94 .....                          | 767 |
| Figure H.5 - AIM EXPRESS-G diagram 5 of 94 .....                          | 768 |
| Figure H.6 - AIM EXPRESS-G diagram 6 of 94 .....                          | 769 |
| Figure H.7 - AIM EXPRESS-G diagram 7 of 94 .....                          | 770 |
| Figure H.8 - AIM EXPRESS-G diagram 8 of 94 .....                          | 771 |
| Figure H.9 - AIM EXPRESS-G diagram 9 of 94 .....                          | 772 |
| Figure H.10 - AIM EXPRESS-G diagram 10 of 94 .....                        | 773 |
| Figure H.11 - AIM EXPRESS-G diagram 11 of 94 .....                        | 774 |
| Figure H.12 - AIM EXPRESS-G diagram 12 of 94 .....                        | 775 |
| Figure H.13 - AIM EXPRESS-G diagram 13 of 94 .....                        | 776 |
| Figure H.14 - AIM EXPRESS-G diagram 14 of 94 .....                        | 777 |
| Figure H.15 - AIM EXPRESS-G diagram 15 of 94 .....                        | 778 |
| Figure H.16 - AIM EXPRESS-G diagram 16 of 94 .....                        | 779 |
| Figure H.17 - AIM EXPRESS-G diagram 17 of 94 .....                        | 780 |
| Figure H.18 - AIM EXPRESS-G diagram 18 of 94 .....                        | 781 |
| Figure H.19 - AIM EXPRESS-G diagram 19 of 94 .....                        | 782 |
| Figure H.20 - AIM EXPRESS-G diagram 20 of 94 .....                        | 783 |
| Figure H.21 - AIM EXPRESS-G diagram 21 of 94 .....                        | 784 |
| Figure H.22 - AIM EXPRESS-G diagram 22 of 94 .....                        | 785 |
| Figure H.23 - AIM EXPRESS-G diagram 23 of 94 .....                        | 786 |
| Figure H.24 - AIM EXPRESS-G diagram 24 of 94 .....                        | 787 |
| Figure H.25 - AIM EXPRESS-G diagram 25 of 94 .....                        | 788 |
| Figure H.26 - AIM EXPRESS-G diagram 26 of 94 .....                        | 789 |
| Figure H.27 - AIM EXPRESS-G diagram 27 of 94 .....                        | 790 |
| Figure H.28 - AIM EXPRESS-G diagram 28 of 94 .....                        | 791 |
| Figure H.29 - AIM EXPRESS-G diagram 29 of 94 .....                        | 792 |
| Figure H.30 - AIM EXPRESS-G diagram 30 of 94 .....                        | 793 |

|  |     |
|--|-----|
| Figure H.31 - AIM EXPRESS-G diagram 31 of 94 ..... | 794 |
| Figure H.32 - AIM EXPRESS-G diagram 32 of 94 ..... | 795 |
| Figure H.33 - AIM EXPRESS-G diagram 33 of 94 ..... | 796 |
| Figure H.34 - AIM EXPRESS-G diagram 34 of 94 ..... | 797 |
| Figure H.35 - AIM EXPRESS-G diagram 35 of 94 ..... | 798 |
| Figure H.36 - AIM EXPRESS-G diagram 36 of 94 ..... | 799 |
| Figure H.37 - AIM EXPRESS-G diagram 37 of 94 ..... | 800 |
| Figure H.38 - AIM EXPRESS-G diagram 38 of 94 ..... | 801 |
| Figure H.39 - AIM EXPRESS-G diagram 39 of 94 ..... | 802 |
| Figure H.40 - AIM EXPRESS-G diagram 40 of 94 ..... | 803 |
| Figure H.41 - AIM EXPRESS-G diagram 41 of 94 ..... | 804 |
| Figure H.42 - AIM EXPRESS-G diagram 42 of 94 ..... | 805 |
| Figure H.43 - AIM EXPRESS-G diagram 43 of 94 ..... | 806 |
| Figure H.44 - AIM EXPRESS-G diagram 44 of 94 ..... | 807 |
| Figure H.45 - AIM EXPRESS-G diagram 45 of 94 ..... | 808 |
| Figure H.46 - AIM EXPRESS-G diagram 46 of 94 ..... | 809 |
| Figure H.47 - AIM EXPRESS-G diagram 47 of 94 ..... | 810 |
| Figure H.48 - AIM EXPRESS-G diagram 48 of 94 ..... | 811 |
| Figure H.49 - AIM EXPRESS-G diagram 49 of 94 ..... | 812 |
| Figure H.50 - AIM EXPRESS-G diagram 50 of 94 ..... | 813 |
| Figure H.51 - AIM EXPRESS-G diagram 51 of 94 ..... | 814 |
| Figure H.52 - AIM EXPRESS-G diagram 52 of 94 ..... | 815 |
| Figure H.53 - AIM EXPRESS-G diagram 53 of 94 ..... | 816 |
| Figure H.54 - AIM EXPRESS-G diagram 54 of 94 ..... | 817 |
| Figure H.55 - AIM EXPRESS-G diagram 55 of 94 ..... | 818 |
| Figure H.56 - AIM EXPRESS-G diagram 56 of 94 ..... | 819 |
| Figure H.57 - AIM EXPRESS-G diagram 57 of 94 ..... | 820 |
| Figure H.58 - AIM EXPRESS-G diagram 58 of 94 ..... | 821 |
| Figure H.59 - AIM EXPRESS-G diagram 59 of 94 ..... | 822 |
| Figure H.60 - AIM EXPRESS-G diagram 60 of 94 ..... | 823 |
| Figure H.61 - AIM EXPRESS-G diagram 61 of 94 ..... | 824 |
| Figure H.62 - AIM EXPRESS-G diagram 62 of 94 ..... | 825 |
| Figure H.63 - AIM EXPRESS-G diagram 63 of 94 ..... | 826 |
| Figure H.64 - AIM EXPRESS-G diagram 64 of 94 ..... | 827 |
| Figure H.65 - AIM EXPRESS-G diagram 65 of 94 ..... | 828 |
| Figure H.66 - AIM EXPRESS-G diagram 66 of 94 ..... | 829 |
| Figure H.67 - AIM EXPRESS-G diagram 67 of 94 ..... | 830 |
| Figure H.68 - AIM EXPRESS-G diagram 68 of 94 ..... | 831 |
| Figure H.69 - AIM EXPRESS-G diagram 69 of 94 ..... | 832 |
| Figure H.70 - AIM EXPRESS-G diagram 70 of 94 ..... | 833 |
| Figure H.71 - AIM EXPRESS-G diagram 71 of 94 ..... | 834 |
| Figure H.72 - AIM EXPRESS-G diagram 72 of 94 ..... | 835 |
| Figure H.73 - AIM EXPRESS-G diagram 73 of 94 ..... | 836 |
| Figure H.74 - AIM EXPRESS-G diagram 74 of 91 ..... | 837 |
| Figure H.75 - AIM EXPRESS-G diagram 75 of 94 ..... | 838 |
| Figure H.76 - AIM EXPRESS-G diagram 76 of 94 ..... | 839 |
| Figure H.77 - AIM EXPRESS-G diagram 77 of 94 ..... | 840 |
| Figure H.78 - AIM EXPRESS-G diagram 78 of 94 ..... | 841 |

ISO 10303-209:2001(E)

|  |     |
|--|-----|
| Figure H.79 - AIM EXPRESS-G diagram 79 of 94 | 842 |
| Figure H.80 - AIM EXPRESS-G diagram 80 of 94 | 843 |
| Figure H.81 - AIM EXPRESS-G diagram 81 of 94 | 844 |
| Figure H.82 - AIM EXPRESS-G diagram 82 of 94 | 845 |
| Figure H.83 - AIM EXPRESS-G diagram 83 of 94 | 846 |
| Figure H.84 - AIM EXPRESS-G diagram 84 of 94 | 847 |
| Figure H.85 - AIM EXPRESS-G diagram 85 of 94 | 848 |
| Figure H.86 - AIM EXPRESS-G diagram 86 of 94 | 849 |
| Figure H.87 - AIM EXPRESS-G diagram 87 of 94 | 850 |
| Figure H.88 - AIM EXPRESS-G diagram 88 of 94 | 851 |
| Figure H.89 - AIM EXPRESS-G diagram 89 of 94 | 852 |
| Figure H.90 - AIM EXPRESS-G diagram 90 of 94 | 853 |
| Figure H.91 - AIM EXPRESS-G diagram 91 of 94 | 854 |
| Figure H.92 - AIM EXPRESS-G diagram 92 of 94 | 855 |
| Figure H.93 - AIM EXPRESS-G diagram 93 of 94 | 856 |
| Figure H.94 - AIM EXPRESS-G diagram 94 of 94 | 857 |

Tables

|   |     |
|---|-----|
| Table 1 - Mapping table for activity_control UoF                                      | 153 |
| Table 2 - Mapping table for advanced_boundary_representation UoF                      | 161 |
| Table 3 - Mapping table for analysis_report UoF                                       | 162 |
| Table 4 - Mapping table for analysis_report UoF                                       | 165 |
| Table 5 - Mapping table for authorization UoF   | 177 |
| Table 6 - Mapping table for composite_constituent_representation UoF                  | 182 |
| Table 7 - Mapping table for effectivity UoF   | 201 |
| Table 8 - Mapping table for end_item_identification UoF                               | 211 |
| Table 9 - Mapping table for faceted_boundary_representation UoF                       | 212 |
| Table 10 - Mapping table for fe_analysis_control UoF                                  | 213 |
| Table 11 - Mapping table for fe_analysis_results UoF                                  | 232 |
| Table 12 - Mapping table for fea_model UoF  | 251 |
| Table 13 - Mapping table for manifold_surface_with_topology UoF                       | 280 |
| Table 14 - Mapping table for material UoF   | 281 |
| Table 15 - Mapping table for non_topological_surface_and_wireframe UoF                | 288 |
| Table 16 - Mapping table for part_composite_constituents UoF                          | 289 |
| Table 17 - Mapping table for part_identification UoF                                  | 316 |
| Table 18 - Mapping table for part_laminate_table UoF                                  | 327 |
| Table 19 - Mapping table for part_shape UoF   | 333 |
| Table 20 - Mapping table for wireframe_with_topology UoF                              | 338 |
| Table 21 - Mapping table for zone_composite_constituents_and_their_representation UoF | 339 |
| Table 22 - Conformance Classes  | 447 |
| Table B.1 - AIM short names of entities   | 640 |

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 10303 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 10303-209 was prepared by Technical Committee ISO/TC 184, *Industrial automation systems and integration*, Subcommittee SC 4, *Industrial data*.

This International Standard is organized as a series of parts, each published separately. The structure of this International Standard is described in ISO 10303-1.

Each part of this International Standard is a member of one of the following series: description methods, implementation methods, conformance testing methodology and framework, integrated generic resources, integration application resources, application protocols, abstract tests suites, application interpreted constructs, and application modules.

This part is a member of the application protocol series.

A complete list of parts of ISO 10303 is available from the Internet:

<http://www.nist.gov/sc4/editing/step/titles>.

Annexes A, B, C, D, and E form a normative part of this part of ISO 10303. Annexes F, G, H, J, and K are for information only.

## Introduction

ISO 10303 is an International Standard for the computer-interpretable representation and exchange of product data. The objective is to provide a neutral mechanism capable of describing products throughout their life cycle. This mechanism makes it suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases, and as a basis for archiving.

This part of ISO 10303 is a member of the application protocol series. This part of ISO 10303 specifies an application protocol (AP) for the exchange of computer-interpretable composite and metallic structural product definitions, including product shape, associated finite element analysis (FEA) models and analysis results, and the material properties of these products.

The shape of a composite or metallic product definition includes the part and its constituents, including any ply shapes necessary for FEA node and mesh generation of boundary definitions. This information is suitable for the automated generation of composite material properties and geometric properties for finite elements. The shape definitions for design and analysis are each independently configuration controlled.

The finite element model idealizes a product or aspects of a product so that it may be analyzed to validate the structural performance and structural integrity of a product.

Finite elements of homogenous (isotropic) metallic and adhesive material properties are treated in this part of ISO 10303 as a subset of anisotropic composite material response. The differences between these two material response idealizations are: 1) a simplified material response, and 2) having no associated composite constituent information.

Assembly information provides the relationships necessary to identify analysis boundary conditions, and when combined with part geometry, topology, and finite element analysis output, provides the input necessary for detail analyses such as those for fastened structural joints.

This part of ISO 10303 satisfies the need for exchange of information between the iterative design and analysis stages of the product life cycle. Product configuration information provides the audit trail necessary to control the designed shape, its associated finite element model, and any related analysis shape information during these iterative stages of the product life cycle.

This application protocol defines the context, scope, and information requirements for the exchange of the information necessary to perform the design through analysis stages of the life cycle of composite and metallic structural parts, and specifies the integrated resources necessary to satisfy these requirements.

Application protocols provide the basis for developing implementations of ISO 10303 and abstract test suites for the conformance testing of AP implementations.

Clause 1 defines the scope of the application protocol and summarizes the functionality and data covered by the AP. Clause 3 lists the words defined in this part of ISO 10303 and gives pointers to words defined elsewhere. An application activity model that is the basis for the definition of the scope is provided in

annex F. The information requirements of the application are specified in clause 4 using terminology appropriate to the application. A graphical representation of the information requirements, referred to as the application reference model, is given in annex G.

Resource constructs are interpreted to meet the information requirements. This interpretation produces the application interpreted model (AIM). This interpretation, given in 5.1, shows the correspondence between the information requirements and the AIM. The short listing of the AIM specifies the interface to the integrated resources and is given in 5.2. Note that the definitions and EXPRESS provided in the integrated resources for constructs used in the AIM may include select list items and subtypes which are not imported into the AIM. The expanded listing given in annex A contains the complete EXPRESS for the AIM without annotation. A graphical representation of the AIM is given in annex H. Additional requirements for specific implementation methods are given in annex C.

Additionally, this application protocol enumerates the conformance requirements which identify the implementation options for the abstract test suite. This application protocol may be implemented as a whole, or as one of the allowed conformance classes. These conformance classes state the implementation options for the representation of finite element analysis models, controls and results, analysis reports, geometric models, composite material constituents and their representations, materials, and configuration control.

A high level planning information model for this application protocol is shown in Figure 1. At this level, the product can be conceptualized as a part that has both design and analysis product definitions. Each definition has one or more shape representations. The analysis product definition has an associated finite element model, analysis controls, and analysis results in addition to its shape representations.

The three possible product shape representations in this application protocol include the nominal design shape, an idealized analysis shape, and a finite element model node shape. The nominal design shape includes geometry and topology for the part and its constituents, such as ply boundaries. The idealized analysis shape includes only the geometry and topology for mesh generation boundaries and associated node geometry. The node shape includes only the node geometry, with no association to design shape or to analysis idealized shape.

The five types of geometric and topological models that may be used to represent part shape in this application protocol are: wireframe and surface without topology, wireframe geometry with topology, manifold surfaces with topology, faceted boundary representation, and advanced boundary representation.

The finite element analysis model consists of nodes, elements, and the associated element properties. The finite element properties include shape aspects and material properties.

The finite element analysis material properties are specified with respect to an environment. The material response matrices of the material properties may have an associated laminate table. The laminate table specifies the constituents, such as plies in a laminate. Each constituent has a boundary, stock material, and specifications. A separate geometric representation is used for composite material constituent representations.

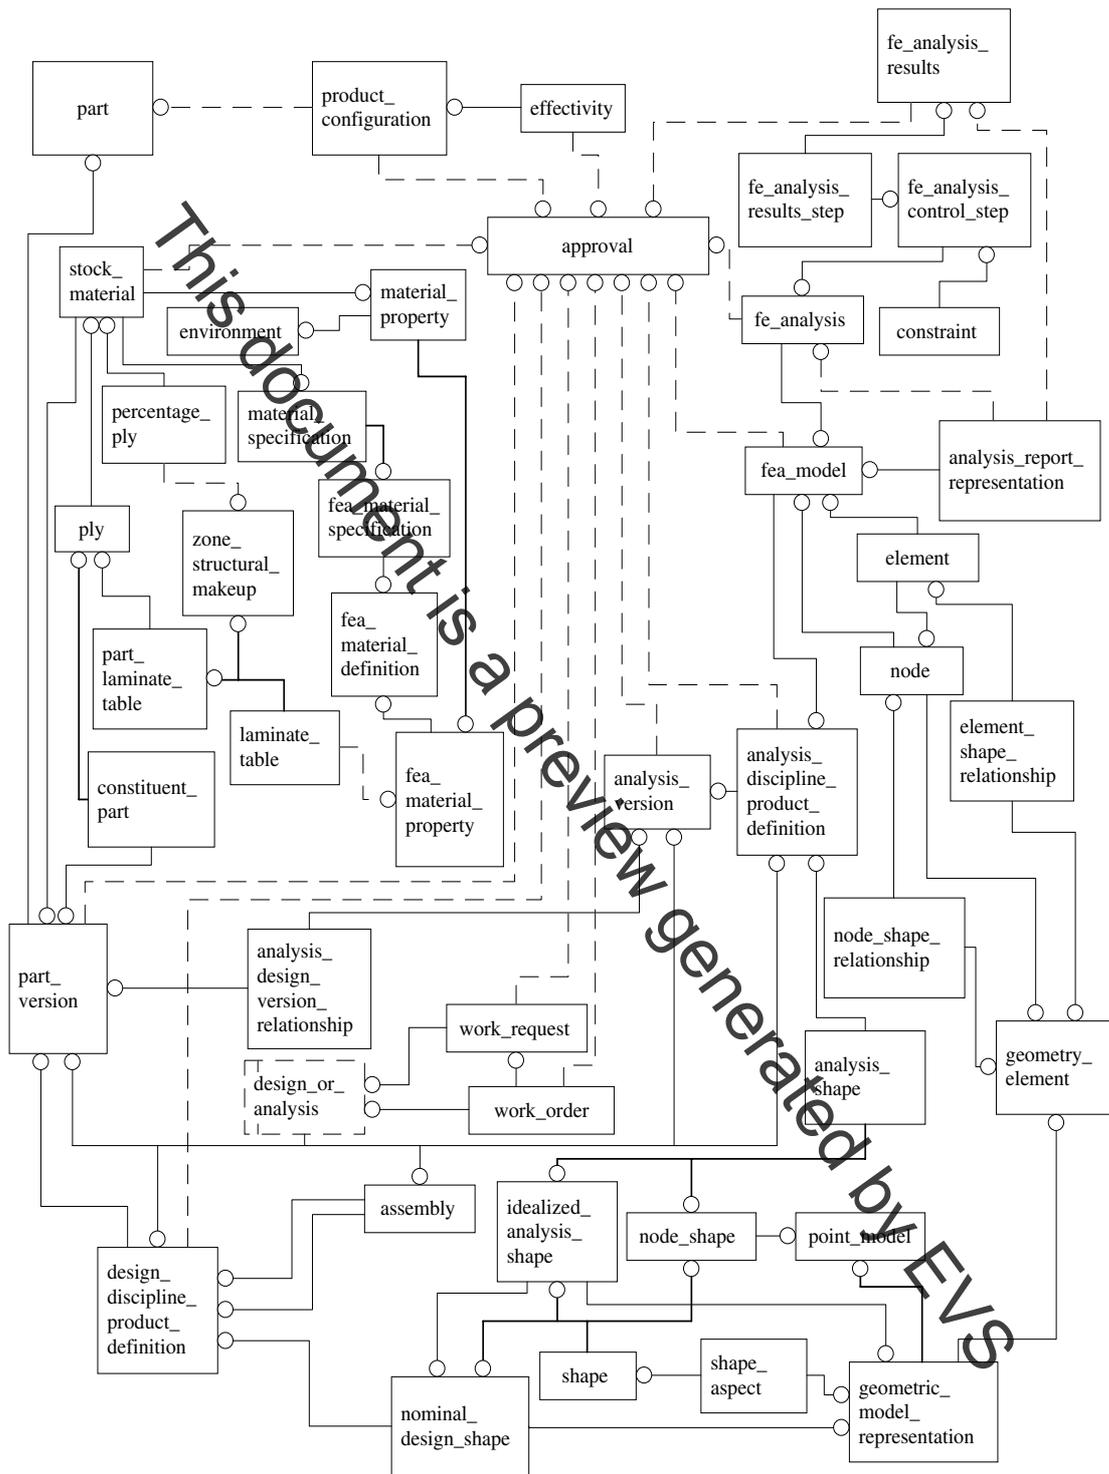


Figure 1 - Data planning model

The finite element analysis controls and results are associated with a finite element model. The analysis controls specify the operations to be carried out upon the model as a series of analysis steps. The analysis results specify the state of the analysis variables at an instant in time. The state information includes nodal solution variables such as deflections, the field variables within the elements, and the values of constraints at a node. An analysis report of the finite analysis results may be presented in tabular and graphical form. The analysis report also documents the detail analyses upon which the finite element analysis results are based.

This document is a preview generated by EVS

This document is a preview generated by EVS

# Industrial automation systems and integration — Product data representation and exchange —

Part 209:

## Application protocol: Composite and metallic structural analysis and related design

### 1 Scope

This part of ISO 10303 specifies the use of integrated resources necessary for the scope and information requirements for the analysis and related design of composite and metallic structural parts. This part of ISO 10303 satisfies the need for the exchange of computer-interpretable composite and metallic structural product definitions, including product shape, associated finite element analysis (FEA) models, material properties, and analysis results.

NOTE The application activity model (AAM) in annex F provides a graphical representation of the processes and information flows which are the basis for the definition of the scope of this part of ISO 10303.

The following are within the scope of this part of ISO 10303:

- the definition of composite structural parts;
- the definition of metallic structural parts;
- linear static finite element analysis;
- linear modes and frequencies finite element analysis;
- the product definition and configuration control information pertaining to the design through analysis stages of a product's development;
- the information relating the part to the adjoining components in an assembly by either explicit or external reference;
- the 2D and 3D models depicting the product shape;
- the five types of geometric and topologic model representations:
  - wireframe and surface without topology;
  - wireframe geometry with topology;

## ISO 10303-209:2001(E)

- manifold surfaces with topology;
  - faceted boundary representation;
  - advanced boundary representation.
- the representations for design and analysis disciplines and the association of nominal design shape, idealized analysis shape, and finite element node shape representations;
  - the association of the constituents of composite and metallic parts with the constituent shape model;
  - the depiction of composite laminate tables describing the material, stacking sequence, ply orientation, and constituents of the composite or a portion of the composite with a defined shape;
  - the identification of material specifications from internal and external sources and their properties for a specific operating environment;
  - the finite element analysis model, analysis controls, and analysis results information;
  - the plane stress and simple plane strain types of linear static and linear modes and frequencies finite element structural analyses;
  - the graphical presentation of:
    - finite element model maps;
    - analysis output information displays on top of the finite element model mesh;
    - line drawings or images which document the part aspects subjected to detail analysis.
  - the tabular presentation of the analysis assumptions, loadings, and critical locations in finite element and detail analysis performed for the assessment of the margin of safety;
  - the administrative information necessary to track the approval and configuration control of the design and analysis of a product at a point in the life cycle when approval and configuration control are necessary;
  - the identification of the supplier of a product, design, or analysis and, where required by an organization, the qualification information for the supplier;
  - a change to a design and an analysis, including information to identify the change, at a point in the life cycle when tracking a change is necessary;
  - the identification, when required, of the contract under which a design is developed and an analysis is performed;
  - the identification of the security classification of a part;

— the explicit representation of a bill-of-material.

The following are outside the scope of this part of ISO 10303:

- the business information for the management of a design and analysis project;
- the product definition and configuration control information pertaining to any information other than that necessary for design and analysis;
- alternate representation of the information by disciplines outside of design and analysis such as manufacturing;
- the use of constructive solid geometry for the representation of the shape of the product;
- the other types of finite element analysis beyond linear analysis, such as non-linear static analysis;
- the explicit graphical presentations derivable from design or analysis product representations;
- the composite fabrication process information;
- the product definition of initial or in-process part shapes.

## 2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 10303. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 10303 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 31:1992, *Quantities and units*

ISO 1000:1992, *SI units and recommendations for the use of their multiples and of certain other units*

ISO/IEC 8824-1:1998, *Information technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation*

ISO 10303-1:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 1: Overview and fundamental principles*

ISO 10303-11:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 11: Description methods: The EXPRESS language reference manual*

## ISO 10303-209:2001(E)

ISO 10303-21:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 21: Clear text encoding of the exchange structure*

ISO 10303-31:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 31: Conformance testing methodology and framework: General concepts*

ISO 10303-41:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 41: Integrated generic resources: Fundamentals of product description and support*

ISO 10303-42:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 42: Integrated generic resources: Geometric and topological representation*

ISO 10303-43:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 43: Integrated generic resources: Representation structures*

ISO 10303-44:1994, *Industrial automation systems and integration - Product data representation and exchange - Part 44: Integrated generic resources: Product structure configuration*

ISO 10303-45:1998, *Industrial automation systems and integration - Product data representation and exchange - Part 45: Integrated generic resource: Materials*

ISO 10303-47:1997, *Industrial automation systems and integration - Product data representation and exchange - Part 47: Integrated generic resource: Shape variation tolerances*

ISO 10303-104:2000 *Industrial automation systems and integration - Product data representation and exchange - Part 104: Integrated application resource: Finite element analysis*

ISO 10303-501:2000 *Industrial automation systems and integration - Product data representation and exchange - Part 501: Application interpreted construct: Edge-based wireframe*

ISO 10303-502:2000 *Industrial automation systems and integration - Product data representation and exchange - Part 502: Application interpreted construct: Shell-based wireframe*

ISO 10303-507:2001 *Industrial automation systems and integration - Product data representation and exchange - Part 507: Application interpreted construct: Geometrically bounded surface*

ISO 10303-509:2001 *Industrial automation systems and integration - Product data representation and exchange - Part 509: Application interpreted construct: Manifold surface*

ISO 10303-510:2000 *Industrial automation systems and integration - Product data representation and exchange - Part 510: Application interpreted construct: Geometrically bounded wireframe*

ISO 10303-512:1999 *Industrial automation systems and integration - Product data representation and exchange - Part 512: Application interpreted construct: Faceted boundary representation*

ISO 10303-514:1999 *Industrial automation systems and integration - Product data representation and exchange - Part 514: Application interpreted construct: Advanced boundary representation*