
**Industrial automation systems and
integration — Product data representation
and exchange —**

Part 204:

**Application protocol: Mechanical design
using boundary representation**

*Systèmes d'automatisation industrielle et intégration — Représentation
et échange de données de produits —*

*Partie 204: Protocole d'application: Conception mécanique utilisant une
représentation délimitée*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

This document is a preview generated by EVS

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents	Page
1 Scope	1
2 Normative references	3
3 Terms, definitions, and abbreviations	5
3.1 Terms defined in ISO 10303-1	5
3.2 Terms defined in ISO 10303-42	6
3.3 Terms defined in ISO 10303-44	6
3.4 Other definitions	7
3.5 Abbreviations	8
4 Information requirements	9
4.1 Units of functionality	11
4.1.1 faceted_B-rep	12
4.1.2 elementary_B-rep	13
4.1.3 advanced_B-rep	14
4.1.4 name_preservation	16
4.1.5 product_structure	16
4.1.6 visual_presentation_for_B-rep	17
4.2 Application objects	18
4.3 Application assertions	34
5 Application interpreted model	38
5.1 Mapping table	38
5.2 AIM EXPRESS short listing	67
6 Conformance requirements	93
6.1 Conformance class 1: B-rep level 1 (CC1)	94
6.2 Conformance class 2: B-rep level 2 (CC2)	94
6.3 Conformance class 3: B-rep level 3 (CC3)	95
Annex A (normative) AIM EXPRESS expanded listing	97
A.1 AIM EXPRESS listing	97
Annex B (normative) AIM short names	185
Annex C (normative) Implementation method specific requirements	192
Annex D (normative) PICS (Protocol Implementation Conformance Statement) proforma	193
Annex E (normative) Information object registration	195
E.1 Document identification	195
E.2 Schema identification	195
Annex F (informative) Application Activity Model (AAM)	196

ISO 10303-204:2002(E)

F.1	AAM definitions	196
F.2	Description of AAM scenario	200
F.3	Mechanical design requirements for model contents and completeness	203
F.4	AAM diagrams	206
Annex G (informative)	Application reference model diagrams	211
Annex H (informative)	AIM EXPRESS-G	224
Annex J (informative)	Computer interpretable listing	243
Annex K (informative)	Technical discussions	244
K.1	Geometric shape description alternatives	244
K.2	Known issues	244
Bibliography		246
Index		247

Figures

Figure 1	The scope of this part of ISO 10303 in the contexts of CAD models and mechanical engineering applications	ix
Figure 2	Data planning model	x
Figure 3	Relationships between geometric AAMs	40
Figure F.1	Conceptual structure of mechanical design product	205
Figure F.2	Industrial manufacturing of mechanical products (node A0)	207
Figure F.3	Industrial manufacturing of mechanical products (node A0 expanded)	208
Figure F.4	Conceptual design (node A3)	209
Figure F.5	Design and evaluation (Node A4)	210
Figure G.1	ARM diagram (1 of 12)	212
Figure G.2	ARM diagram (2 of 12)	213
Figure G.3	ARM diagram (3 of 12)	214
Figure G.4	ARM diagram (4 of 12)	215
Figure G.5	ARM diagram (5 of 12) shell in faceted B-rep	216
Figure G.6	ARM diagram (6 of 12) shell in elementary or advanced_B-rep	217
Figure G.7	ARM diagram (7 of 12) surface in advanced B-rep	218
Figure G.8	ARM diagram (8 of 12) surface in elementary B-rep	219
Figure G.9	ARM diagram (9 of 12) curve in advanced_B-rep	220
Figure G.10	ARM diagram (10 of 12) curve in elementary_B-rep	221
Figure G.11	ARM diagram (11 of 12)	222
Figure G.12	ARM diagram (12 of 12) conventions used in NIAM diagrams	223
Figure H.1	AIM EXPRESS-G diagram advanced B-rep	225
Figure H.2	AIM EXPRESS-G diagram advanced_face	226
Figure H.3	AIM EXPRESS-G diagram surfaces	227
Figure H.4	AIM EXPRESS-G diagram curves	228
Figure H.5	AIM EXPRESS-G diagram elementary_surface	229

Figure H.6	AIM EXPRESS-G diagram b_spline_curve	230
Figure H.7	AIM EXPRESS-G diagram b_spline_surface	231
Figure H.8	AIM EXPRESS-G diagram surface curves	232
Figure H.9	AIM EXPRESS-G diagram elementary B-rep	233
Figure H.10	AIM EXPRESS-G diagram face and curve in elementary B-rep	234
Figure H.11	AIM EXPRESS-G diagram faceted B-rep	235
Figure H.12	AIM EXPRESS-G diagram product structure	236
Figure H.13	AIM EXPRESS-G diagram product structure continued	237
Figure H.14	AIM EXPRESS-G diagram visual presentation	238
Figure H.15	AIM EXPRESS-G diagram camera model and projection	239
Figure H.16	AIM EXPRESS-G diagram point and curve styles	240
Figure H.17	AIM EXPRESS-G diagram surface styles	241
Figure H.18	AIM EXPRESS-G diagram visual presentation concluded	242

Tables

Table 1	Use of units of functionality within functional levels	18
Table 2	Mapping table for advanced_B-rep UoF	41
Table 3	Mapping table for elementary_B-Rep UoF	48
Table 4	Mapping table for faceted_B-Rep UoF	52
Table 5	Mapping table for name_preservation UoF	54
Table 6	Mapping table for product_structure UoF	55
Table 7	Mapping table for visual_presentation_for_B-rep UoF	59
Table 8	Units of functionality within conformance classes	94
Table 9	AIM entities within conformance classes	96
Table B.1	AIM short names of entities	185

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 10303 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 10303-204 was prepared by Technical Committee ISO TC184/SC4, *Industrial automation systems and integration*, Subcommittee SC4 *Industrial data*.

This International Standard is organised as a series of parts, each published separately. The structure of this International Standard is described in ISO 10303-1.

Each part of this International Standard is a member of one of the following series: description methods, implementation methods, conformance testing methodology and framework, integrated generic resources, integrated application resources, application protocols, abstract test suites, application interpreted constructs, and application modules. This part is a member of the application protocol series.

A complete list of parts of ISO 10303 is available from Internet:

<http://www.tc184-sc4.org/titles/ST44titles.rtf>

Annexes A, B, C, D and E form an integral part of this part of ISO 10303. Annexes F, G, H, J and K are for information only.

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation and exchange of product data. The objective is to provide a neutral mechanism capable of describing products throughout their life cycle. This mechanism is suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases and as a basis for archiving.

This part of ISO 10303 is a member of the application protocol series.

This Part of ISO 10303 specifies an application protocol (AP) for mechanical design using boundary representation solid models. A boundary representation solid model provides a complete description of the shape of a solid object by describing precisely the geometry and topology of all its internal and external boundaries.

This application protocol defines the context, scope, and information requirements for mechanical design using boundary representation models and specifies the integrated resources necessary to satisfy these requirements.

Application protocols provide the basis for developing implementations of ISO 10303. Application protocols provide the basis for developing abstract test suites for the conformance testing of AP implementations.

Clause 1 defines the scope of the application protocol and summarizes the functionality and data covered by the AP. An application activity model that is the basis for the definition of the scope is provided in annex F. The information requirements of the application are specified in clause 4 using terminology appropriate to the application. A graphical representation of the information requirements, referred to as the application reference model, is given in annex G.

Resource constructs are interpreted to meet the information requirements. This interpretation produces the application interpreted model (AIM). This interpretation, given in 5.1, shows the correspondence between the information requirements and the AIM. The short listing of the AIM specifies the interface to the integrated resources and is given in 5.2. note that definitions and the EXPRESS provided in the integrated resources for constructs used in the AIM may include select list items and subtypes not imported into the AIM. The expanded listing given in Annex A contains the complete EXPRESS of the AIM without annotation. A graphical representation of the AIM is given in annex H. Additional requirements for specific implementation methods are given in annex C.

This Part of ISO 10303 contains the definition of conforming boundary representation solid models and the mechanisms to transfer them via an exchange structure as defined in Part ISO 10303-21. The exchange of such models, with associated visual presentation information is required during the initial design of a mechanical product and when detailed designs of components are communicated to suppliers and sub-contractors. In this Part B-reps are characterised by the fact that they can represent models with only planar surfaces (faceted B-rep), models with only analytical surfaces (elementary B-rep) and models with sculptured surfaces and curves (advanced B-rep). The application reference environment in which these B-rep models are used is the generation and exchange of volume-based data in the Computer-aided Mechanical design process. This application places fundamental requirements on the model exchange

and the neutral representation of models. The transfer and archiving of B-rep models at different stages of the design and engineering process requires the following to be maintained:

- the completeness of the models when mapped between application systems;
- the correctness of semantics of the representation;
- the accuracy of the geometric relationships between entity instances which form part of a B-rep model; in particular all vertices shall lie on the edges using them and all edge_curves shall lie on each face using this edge as part of the boundary.

Three different classes of implementation are specified in clause 6.

This application protocol was developed as one component of a series of Mechanical Design application protocols and is complemented by ISO 10303-205 Mechanical design using surface models, see (1). These Parts share a common application environment and have a similar scope for the representation of mechanical parts. The significant differences among these Parts of ISO 10303 is in the manner in which the shape of a mechanical part is represented. In this Part the representation is as a manifold solid boundary representation model. In ISO 10303-205 the shape of the part is represented by a surface model in which all surfaces and bounding curves are fully represented. Figure 1 gives a pictorial representation of the scope of this AP.

NOTE 1 In figure 1 the term scope refers to the intended scope of the information models in this Part of ISO 10303. These information models may be useful as part of an information model for applications shown as 'out of scope' in this diagram.

Figure 2 contains the data planning model that gives a high level description of the requirements for this application protocol, as well as the relationships between the basic data objects.

NOTE 2 A dashed line in figure 2 is used to denote an optional association.

The planning model illustrates that a product may be either a part or an assembly. The shape of a part or assembly is represented by a shape model which takes the form of one, or more, B-reps. Each B-rep is either a faceted B-rep, an elementary B-rep, or an advanced B-rep. Names can be associated with products, parts or shape models. Visual properties may optionally be attached to B-rep models.

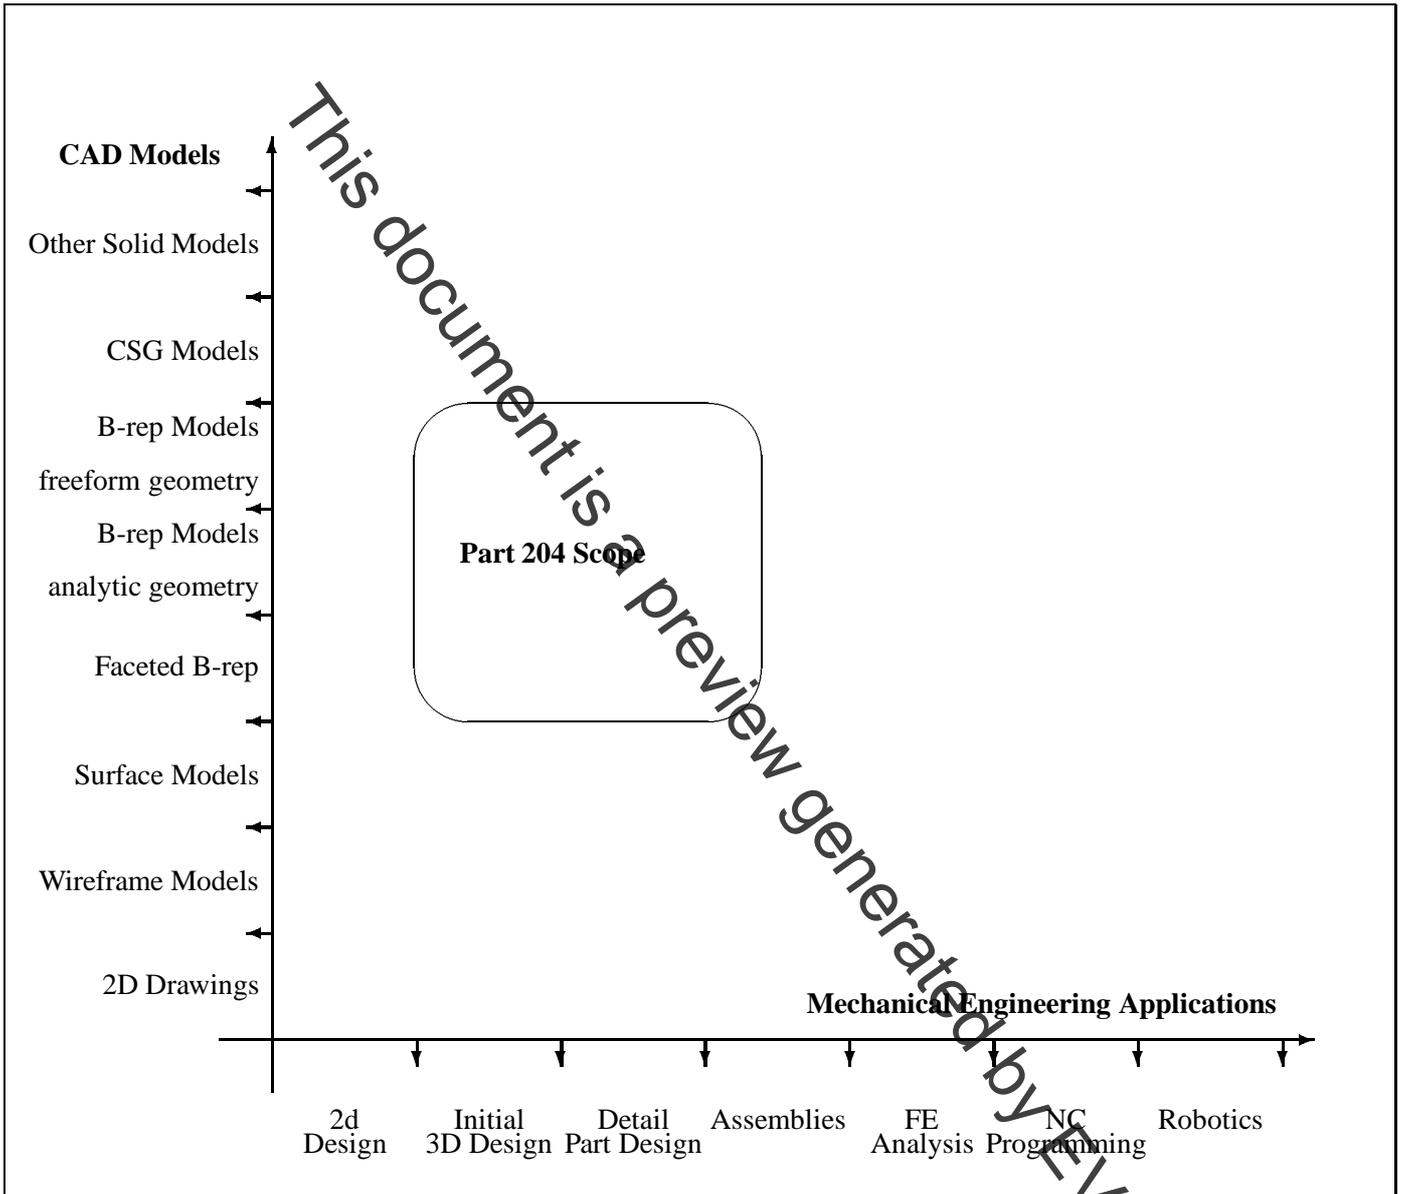


Figure 1 – The scope of this part of ISO 10303 in the contexts of CAD models and mechanical engineering applications

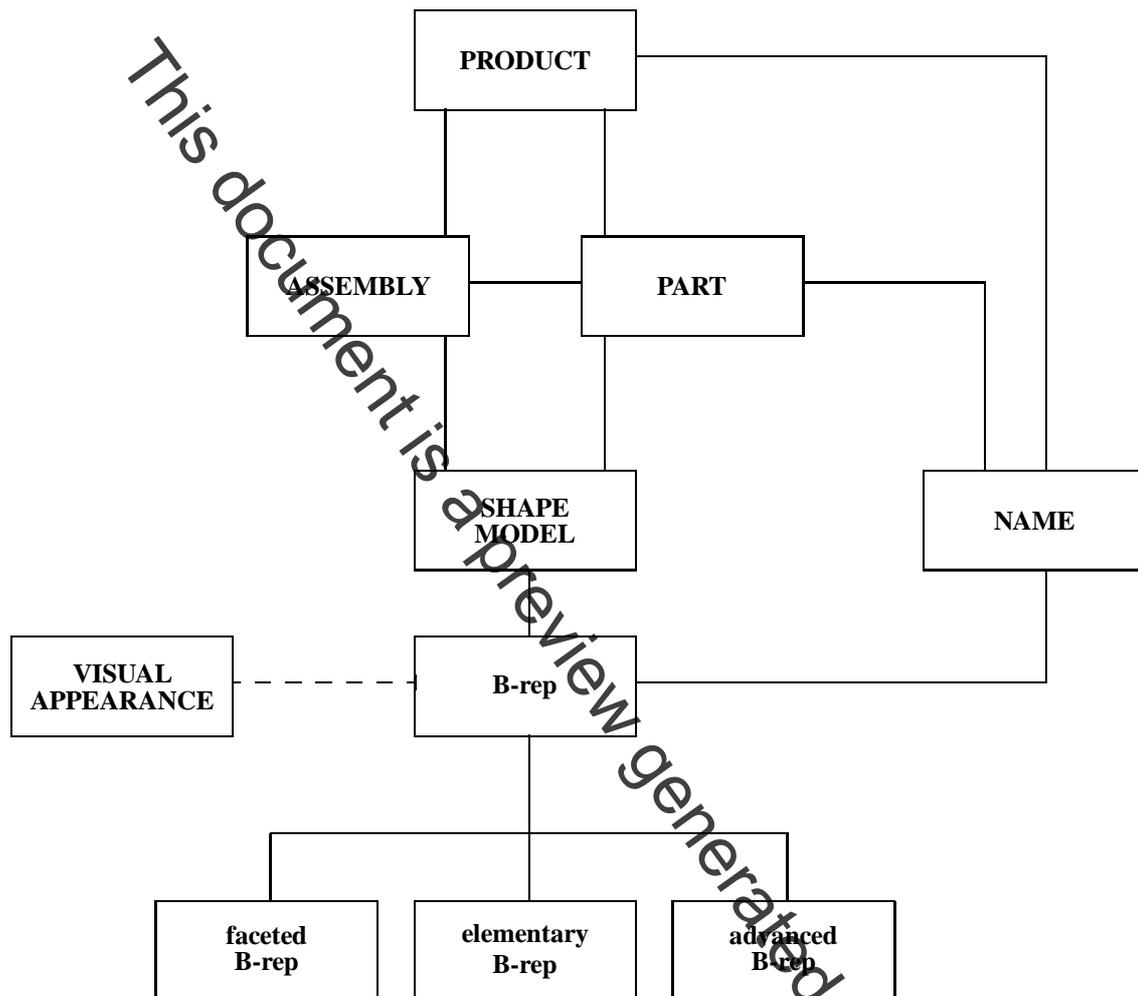


Figure 2 – Data planning model

Industrial automation systems and integration — Product data representation and exchange —

Part 204:

Application protocol: Mechanical design using boundary representation

1 Scope

This part of ISO 10303 specifies the use of the integrated resources necessary for the scope and information requirements for the use and exchange of boundary representation solid models in the mechanical engineering design context.

NOTE The application activity model in annex F provides a graphical representation of the processes and information flows that are the basis for the definition of the scope of this part of ISO 10303.

This document describes an application reference environment for the generation and exchange of volume-based design data in the computer-aided mechanical design process, together with appropriate data models and a physical file implementation form. The information model supports all geometric and topological aspects of a complete description of the shape and size of an object. It was originally developed for applications in mechanical engineering design using the CAD modelling technique boundary representation (B-rep) solid modelling and may be appropriate for other application areas using this technique.

The following are within the scope of this Part of ISO 10303:

- Three types of B-rep model that are used to represent shape:
 - a) faceted B-rep model;
 - b) B-rep model with elementary surfaces;
 - c) B-rep model with sculptured surfaces;
- curve and surface geometry;
- curves defined in parameter space (pcurves);
- manifold topology;
- product identification information;
- the association of simple presentation attributes such as line-style, line-width, colour with an entire B-rep model, or, with geometric or topological elements of a B-rep model;

ISO 10303-204:2002(E)

- preservation of user-defined names of objects;
- units and measures associated with geometric elements;
- assemblies of parts and sub-assemblies.

The following are outside the scope of this Part of ISO 10303:

- Other types of shape representation:
 - a) wireframe models;
 - b) surface models;
 - c) geometrically trimmed curves and surfaces;
 - d) constructive solid geometry models;
 - e) compound B-rep models.
- Geometric and topological data:
 - a) 2D geometry, other than for the definition of curves;
 - b) self-intersecting geometry;
 - c) non-manifold topology.
- Dimensioning;
- Tolerances;
- Manufacturing information;
- Advanced presentation features such as multiple views, character fonts and symbols.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 10303. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 10303 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 10303-1:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 1: Overview and fundamental principles*

ISO 10303-11:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 11: Description methods: The EXPRESS language reference manual*

ISO 10303-21:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 21: Implementation methods: Clear text encoding of the exchange structure*

ISO 10303-22:1998, *Industrial automation systems and integration — Product data representation and exchange — Part 22: Implementation methods: Standard data access interface*

ISO 10303-31:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 31: Conformance testing methodology and framework: General concepts*

ISO 10303-41:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 41: Integrated generic resources: Fundamentals of product description and support*

ISO 10303-42:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 42: Integrated generic resources: Geometric and topological representation*

ISO 10303-43:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 43: Integrated generic resources: Representation structures*

ISO 10303-44:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 44: Integrated generic resources: Product structure configuration*

ISO 10303-46:1994, *Industrial automation systems and integration — Product data representation and exchange — Part 46: Integrated generic resources: Visual presentation.*

ISO 10303-511:2001, *Industrial automation systems and integration — Product data representation and exchange — Part 511: Application interpreted construct: Topology bounded surface*

ISO 10303-512:1999, *Industrial automation systems and integration — Product data representation and exchange — Part 512: Application interpreted construct: Faceted boundary representation*

ISO 10303-513:2000, *Industrial automation systems and integration — Product data representation and exchange — Part 513: Application interpreted construct: Elementary boundary representation*

ISO 10303-204:2002(E)

ISO 10303-514:1999, *Industrial automation systems and integration — Product data representation and exchange — Part 514: Application interpreted construct: Advanced boundary representation*

ISO 10303-517:2000, *Industrial automation systems and integration — Product data representation and exchange — Part 517: Application interpreted construct: Mechanical design geometric presentation*

ISO 10303-518¹⁾, *Industrial automation systems and integration — Product data representation and exchange — Part 518: Application interpreted construct: Mechanical design shaded presentation*

ISO/IEC 8824-1:1998, *Information technology — Abstract Syntax Notation One (ASN.1): Specification of basic notation*

This document is a preview generated by EVS

¹⁾To be published.