

Adjustable telescopic steel props - Product specification, design and assessment by calculation and tests

Adjustable telescopic steel props - Product
specification, design and assessment by calculation
and tests

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

<p>Käesolev Eesti standard EVS-EN 1065:2001 sisaldab Euroopa standardi EN 1065:1998 ingliskeelset teksti.</p> <p>Käesolev dokument on jõustatud 18.06.2001 ja selle kohta on avaldatud teade Eesti standardiorganisatsiooni ametlikus väljaandes.</p> <p>Standard on kättesaadav Eesti standardiorganisatsioonist.</p>	<p>This Estonian standard EVS-EN 1065:2001 consists of the English text of the European standard EN 1065:1998.</p> <p>This document is endorsed on 18.06.2001 with the notification being published in the official publication of the Estonian national standardisation organisation.</p> <p>The standard is available from Estonian standardisation organisation.</p>
--	---

<p>Käsitlusala: This European Standard specifies materials, design requirements, corrosion protection alternatives, production control requirements together with assessment methods using both calculation and testing for open thread and covered thread adjustable telescopic steel props which are intended for use on construction sites.</p>	<p>Scope: This European Standard specifies materials, design requirements, corrosion protection alternatives, production control requirements together with assessment methods using both calculation and testing for open thread and covered thread adjustable telescopic steel props which are intended for use on construction sites.</p>
---	---

ICS 91.220

Võtmesõnad: adjustment, building sites, classifications, computation, corrosion prevention, designation, dimensions, marking, mechanical strength, props, scaffolding, steels, tests, verification

ICS 91.220

Descriptors: Building materials, steel props, testing.

English version

Adjustable telescopic steel props

Product specifications, design and assessment by calculation and tests

Etais télescopiques réglables en acier –
Spécifications du produit, conception
et évaluation par calculs et essais

Baustützen aus Stahl mit Ausziehvor-
richtung – Produktfestlegungen,
Bemessung und Nachweis durch
Berechnung und Versuche

This European Standard was approved by CEN on 1998-06-10.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

The European Standards exist in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, the Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, the Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, and the United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Contents

	Page
Foreword	3
Introduction	3
1 Scope	3
2 Normative references	4
3 Definitions and symbols	6
4 Classification	8
5 Designation	9
6 Materials	9
6.1 General	9
6.2 Modification by cold working	9
6.3 Corrosion protection	10
7 Configuration	10
7.1 Tubes	10
7.2 Welding	11
7.3 Length adjustment device	11
7.4 Permanent prevention against unintentional disengagement	12
7.5 Endplates	13
7.6 Props with fixed forkheads	13
7.7 Anti hand trap	15
7.8 Minimum extended length	15
7.9 Overlapping length	16
7.10 Data required from the manufacturer	16
8 Nominal characteristic strength	16
9 Verification	16
9.1 General	16
9.2 Verification of the actual characteristic strength by calculation	17
9.3 Verification of the actual characteristic strength by testing	20
9.4 Verification of the strength of adjustment device	21
9.5 Verification of the prevention against unintentional disengagement	21
10 Test methods	21
10.1 General	21
10.2 Test method for the prop strength	22
10.3 Test of a pin and its supports	25
10.4 Test of the prevention against unintentional disengagement	26
11 Test report	26
12 Marking	27
Annex A (normative) Equations for the calculation of the structural properties of tubes	28
Annex B (normative) Calculation of resistance for pin connections	30
Annex C (normative) Statistical evaluation of data	31
Annex D (informative) Prototype assessment	32

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 53 "Temporary works equipment", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 1999, and conflicting national standards shall be withdrawn at the latest by March 1999.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

Whilst this European Standard deals with the more common types of adjustable telescopic steel props in use, it is not intended to prevent development of other types of props. For example, props may have hinged ends or other length adjustment devices or be made of other materials. Whilst such props cannot comply with this European Standard it is recommended that the principals of this European Standard be considered in the design and assessment of such props.

The characteristic strengths values specified in this European Standard form a reference level which is unsafe for direct site use. It is a matter for a separate European Standard to relate these characteristic strengths to safe site usage by applying suitable partial safety factors γ_M and γ_F . It is also a matter for a separate European Standard to specify the required level of corrosion protection and inspection.

This European Standard is a product standard primarily for use in the field of falsework and formwork.

In cases where the prop is an integral part of a system of soffit support, other design and assessment procedures may be more appropriate or even necessary.

This European Standard gives a number of alternatives, a designation of which is given in clause 5.

1 Scope

This European Standard specifies materials, design requirements, corrosion protection alternatives together with assessment methods using both calculations and testing for open thread and covered thread adjustable telescopic steel props which are intended for use on construction sites (see figure 1).

It specifies five classes of nominal characteristic strengths for adjustable telescopic steel props each having a series of maximum extended lengths. Each having differing endplate configuration.

This European Standard does not apply to adjustable props of different materials or construction, nor does it provide any information concerning the use of adjustable steel props.

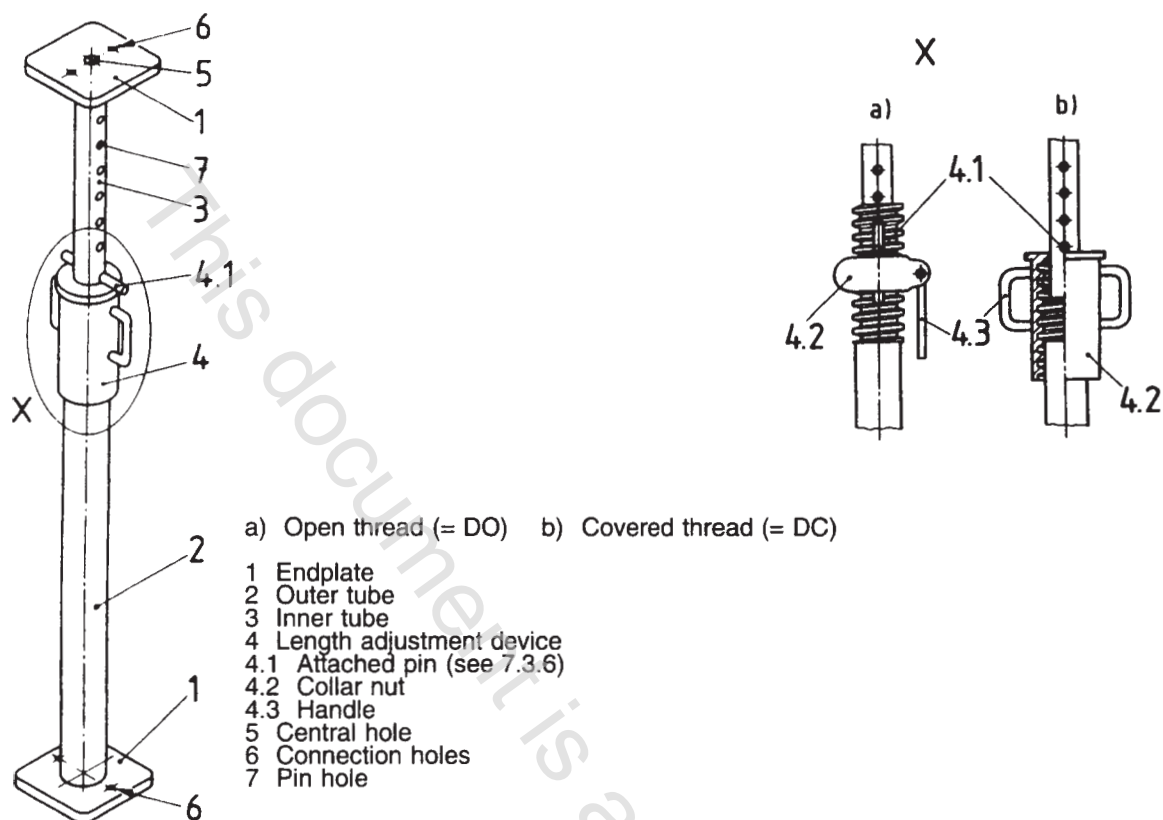


Figure 1: Adjustable telescopic steel prop

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 74

Couplers, loose spigots and base-plates for use in working scaffolds and falsework made of steel tubes – Requirements and test procedures

EN 729-2

Quality requirements for welding - Fusion welding of metallic materials - Part 2: Comprehensive quality requirements

EN 1562

Founding - Malleable cast irons

EN 1563

Founding - Spheroidal graphite cast irons

EN 10002-1

Tensile testing of metallic materials – Method of test at ambient temperature

EN 10025

Hot rolled products of non-alloy structural steels – Technical delivery conditions

EN 10083-1

Quenched and tempered steels – Part 1: Technical delivery conditions for special steels

- EN 10083-2
Quenched and tempered steels – Part 2: Technical delivery conditions for unalloyed quality steels
- EN 10083-3
Quenched and tempered steels – Part 3: Technical delivery conditions for boron steels
- EN 10113-1
Hot-rolled products in weldable fine grain structural steels – Part 1: General delivery conditions
- EN 10113-2
Hot-rolled products in weldable fine grain structural steels – Part 2: Delivery conditions for normalized/ normalized rolled steels
- EN 10113-3
Hot-rolled products in weldable fine grain structural steels – Part 3: Delivery conditions for thermomechanical rolled steels
- EN 10155
Structural steels with improved atmospheric corrosion resistance – Technical delivery conditions
- EN 10204 : 1991
Metallic products - Types of inspection documents
- EN 10210-1
Hot finished structural hollow sections of non-alloy and fine grain structural steels - Part 1: Technical delivery requirements
- EN 10210-2
Hot finished structural hollow sections of non-alloy and fine grain structural steels – Part 2: Tolerances, dimensions and sectional properties
- EN 10219-1
Cold formed structural hollow sections of non-alloy and fine grain structural steels – Part 1: Technical delivery requirements
- EN 10219-2
Cold formed structural hollow sections of non-alloy and fine grain structural steels – Part 2: Tolerances, dimensions and sectional properties
- prEN 39
Steel tubes for tube and coupler scaffold structures – Technical delivery conditions
- ENV 1993-1-1
Eurocode 3: Design of steel structures – Part 1-1: General rules and rules for buildings
- EN ISO 9001
Quality systems - Model for quality assurance in design, development, production, installation and servicing (ISO 9001)
- EN ISO 9002
Quality systems - Model for quality assurance in production, installation and servicing (ISO 9002)
- ISO 2937
Plain end seamless steel tubes for mechanical application
- ISO 3304
Plain end seamless precision steel tubes – Technical conditions for delivery
- ISO 3305
Plain end welded precision steel tubes – Technical conditions for delivery

3 Definitions and symbols

For the purposes of this European Standard the following definitions and symbols apply.

3.1 adjustable telescopic steel prop: Compression member normally used as temporary vertical support in construction works. A prop consists of two tubes which are telescopically displaceable within each other. A prop has a coarse adjustment with a pin inserted into holes in the inner tube and a means of fine adjustment using a threaded collar (see figure 1).

3.2 endplate: Plate which is fixed at right angles to one end of inner or outer tube.

3.3 forkhead: Endplate with lateral projections to locate a beam.

3.4 collar nut: Nut which incorporates at least one handle and has one face which supports the pin and is internally threaded to provide fine length adjustment to the prop.

3.5 inner tube: The smaller diameter tube provided with holes for the coarse adjustment of the prop.

3.6 outer tube: The larger diameter tube one end of which is threaded externally.

3.7 length adjustment device: Device consisting of a pin, collar nut, holes in the inner tube and a threaded outer tube.

NOTE: The forces from the endplate are transferred to the pin inserted in the inner tube holes and to the collar nut which transfers the forces to the outer tube thread. In some prop designs an additional loose washer is used between the pin and the collar nut.

3.8 pin: The part of the length adjustment device which is inserted through the inner tube holes and is secured to the prop.

3.9 length at maximum extension: The distance measured between the outside faces of the endplates when the prop is in the fully extended position.

NOTE: The prop extension is called "fully open" if the pin is in the hole farthest away from the inner tube endplate and the collar nut is in the uppermost position. The prop extension is called "fully closed" if the pin is in the hole nearest the inner tube endplate and the collar nut is in the lowest position.

3.10 main symbols: Symbols are given in table 1.