

**Liftide valmistamise ja paigaldamise ohutuseeskirjad.
Inimeste ja kauba transpordi liftid. Osa 22: Kaldtõusuga
elektrilised liftid**

**Safety rules for the construction and installation of lifts -
Lifts for the transport of persons and goods - Part 22:
Electric lifts with inclined path**

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

See Eesti standard EVS-EN 81-22:2014 sisaldab Euroopa standardi EN 81-22 :2014 inglisekeelset teksti.	This Estonian standard EVS-EN 81-22:2014 consists of the English text of the European standard EN 81-22 :2014.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas.	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation.
Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 21.05.2014.	Date of Availability of the European standard is 21.05.2014.
Standard on kättesaadav Eesti Standardikeskusest.	The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile standardiosakond@evs.ee.

ICS 91.140.90

Standardite reprodutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:
Aru 10, 10317 Tallinn, Eesti; www.evs.ee; telefon 605 5050; e-post info@evs.ee

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:
Aru 10, 10317 Tallinn, Estonia; www.evs.ee; phone 605 5050; e-mail info@evs.ee

ICS 91.140.90

English Version

Safety rules for the construction and installation of lifts - Lifts for the transport of persons and goods - Part 22: Electric lifts with inclined path

Règles de sécurité pour la construction et l'installation des ascenseurs - Ascenseurs pour le transport de personnes et d'objets - Partie 22 : Ascenseurs électriques à voie inclinée

Sicherheitsregeln für die Konstruktion und den Einbau von Aufzügen - Aufzüge für den Personen- und Gütertransport - Teil 22: Elektrisch betriebene Aufzüge mit geneigter Fahrbahn

This European Standard was approved by CEN on 4 February 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	5
0 Introduction	6
0.1 General.....	6
0.2 Considerations.....	6
0.3 Principles.....	6
0.4 Assumptions	7
1 Scope	10
2 Normative references	11
3 Terms and definitions, symbols and abbreviated terms	13
3.1 Terms and definitions	13
3.2 Symbols and abbreviated terms	19
4 List of significant hazards	19
4.1 General.....	19
5 Safety requirements and/or protective measures	22
5.1 General provisions	22
5.2 Lift well.....	22
5.3 Machine, working areas and pulley spaces	32
5.4 Landing doors	43
5.5 Car, vehicle, counterweight, balancing weight.....	50
5.6 Suspension, compensation, overspeed protection and protection against unintended vehicle movement.....	61
5.7 Running tracks, guide rails, counter-guide rails and safety gear operating element – Buffers – Final limit switches	72
5.8 Clearances between vehicle and wall facing the vehicle entrance, and between car, counterweight or balancing weight	78
5.9 Lift machine	79
5.10 Electric installations and appliances.....	85
5.11 Protection against electric faults; controls; priorities	91
6 Verification of the safety requirements and/or protective measures	107
6.1 Methods to be used	107
6.2 Specific data, test reports and certificates	114
7 Information for use	114
7.1 General.....	114
7.2 Signals and warning devices.....	114
7.3 Inspection and test	119
7.4 Accompanying documents (in particular, instruction handbook).....	120
Annex A (normative) List of the safety contacts	124
Annex B (normative) Unlocking triangle.....	126
Annex C (informative) Technical dossier.....	127
C.1 Introduction	127
C.2 General.....	127
C.3 Technical documents and plans	127
C.4 Electric schematic diagrams	128
C.5 Verification of conformity	128
Annex D (normative) Examinations and tests before putting into service	129

D.1	General	129
D.2	Examinations	129
D.3	Tests and verifications.....	129
Annex E	(informative) Periodical examinations and tests, examinations and tests after an important modification or after an accident	133
E.1	Periodical examinations and tests	133
E.2	Examinations and tests after an important modification or after an accident.....	133
Annex F	(normative) Safety components - Test procedures for verification of conformity	135
F.0	Introduction.....	135
F.1	Landing door locking devices.....	136
F.2	Safety gear	140
F.3	Overspeed governors	144
F.4	Buffers	147
F.5	Safety circuits containing electronic components and/or programmable electronic systems (PESSRAL).....	153
F.6	Ascending vehicle overspeed protection means.....	156
F.7	Unintended vehicle movement protection means	159
Annex G	(informative) Calculation of the supporting structure, the running tracks, the guide rails, the vehicle and the safety gear gripping element.....	164
G.1	General	164
G.2	Actions to take into account for calculation.....	164
G.3	Proof of guide rails	167
Annex H	(normative) Electronic components- Failure exclusion	168
H.1	Scope	168
H.2	Failure exclusions - conditions.....	168
Annex I	(informative) Safety circuits	172
I.1	Design guide-line for safety circuits	172
I.2	Description of possible measures	172
Annex J	(normative) Pendulum shock tests	179
J.1	General	179
J.2	Test rig.....	179
J.3	Panels	179
J.4	Test procedure.....	179
J.5	Interpretation of the results	180
J.6	Test report.....	180
J.7	Exceptions from the tests.....	180
Annex K	(informative) Traction evaluation.....	185
K.1	General provisions	185
K.2	Traction calculation.....	185
K.3	Practical example	190
Annex L	(normative) Evaluation of safety factor for suspension ropes	193
L.1	General	193
L.2	Equivalent number N_{equiv} of pulleys	193
L.3	Static safety factor	194
L.4	Examples	195
Annex M	(informative) Machinery spaces – Access (5.3.3)	197
Annex N	(informative) Building interfaces	198
N.1	General provisions	198
N.2	Support of guide rails	198
N.3	Ventilation of car, lift well and machinery spaces	198
Annex O	(informative) Environment: aspects to be considered for a risk analysis	201

Annex P (informative) Determination of anti-slip properties for floor surfaces 203

P.1 General..... 203

P.2 Testing and assessing anti-slip properties..... 203

Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 95/16/EC 205

Bibliography..... 206

Foreword

This document (EN 81-22:2014) has been prepared by Technical Committee CEN/TC 10 “Lifts, escalators and moving walks”, the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2014, and conflicting national standards shall be withdrawn at the latest by November 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

This document is part of the EN 81 series of standards, *Safety rules for the construction and installation of lifts*.

This is the first edition of this European Standard.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

0 Introduction

0.1 General

This document is a type C standard as stated in EN ISO 12100.

The machinery concerned and the extent, to which hazards, hazardous situations and events are covered, are indicated in the scope of this standard.

When provisions of this type C standard are different from those which are stated in type A or B standards, the provisions of this type C standard take precedence over the provisions of the other standards, for machines that have been designed and built according to the provisions of this type C standard.

The purpose of this standard is to define safety requirements for inclined lifts in order to safeguard persons and objects against risks of accidents during installation, operation, maintenance, inspection work and emergency operations of lifts.

0.2 Considerations

Consideration has been taken into account of various categories of lifts with inclined travel path to ascertain the related hazards and risks owing to the configuration of structures (civil engineering works), inclination and outside influences such as the following:

- a) the large opening to the exterior;
- b) the possibility to walk around inside the lift well;
- c) the arrangement of the doors;
- d) the horizontal component of deceleration in the event of stopping of the vehicle.

The prescriptions relating to the protection of workers and to the evacuation from the car are different when it is possible to walk inside the well and when the car roof is used as working station for the maintenance.

An Interpretation Committee has been established to clarify, if necessary, the spirit in which the clauses of the standard have been drafted and to specify the requirements appropriate to particular cases. Interpretation Requests can be sent to the National Standard Bodies which will contact the responsible Technical Committee CEN/TC 10 (see CEN/TR 81-10 [1] for information).

0.3 Principles

In drawing up this standard the following have been used.

This standard does not repeat all the general technical rules applicable to every electrical, mechanical, or building construction including the protection of building elements against fire.

It has, however, seemed necessary to establish certain requirements of good construction, either because they are peculiar to lift manufacture or because in the case of lift utilization the requirements may be more stringent than elsewhere.

This standard does not only address the essential safety requirements of the Lift Directive, but additionally states minimum rules for the installation of lifts into buildings/constructions. There may be in some countries regulations for the construction of buildings, etc. which cannot be ignored.

Typical clauses affected by this are those defining minimum values for the height of the machine and pulley rooms and for their access doors dimensions.

When the weight, size and/or shape of components prevent them from being moved by hand, they are:

- a) either fitted with attachments for lifting gear, or
- b) designed so that they can be fitted with such attachments (e.g. by means of threaded holes), or
- c) shaped in such a way that standard lifting gear can easily be attached.

As far as possible the standard sets out only the requirements that materials and equipment will meet in the interests of safe operation of lifts.

0.4 Assumptions

The contents of this standard are based on the assumption that persons using inclined lifts are able to do so unaided.

It is assumed that negotiations have been made for each contract between the customer and the supplier/installer (see also Annex O) about:

- a) intended use of the inclined lift;
- b) environmental conditions;
- c) civil engineering problems;
- d) other aspects relating to the place of installation (e.g. high-voltage electric line, bridges, dangerous buildings, natural obstacle).

Possible risks have been considered of each component that may be incorporated in a complete lift installation. Rules have been drawn up accordingly.

Components are:

- designed in accordance with usual engineering practice and calculation codes, taking into account all failure modes;
- of sound mechanical and electrical construction;
- made of materials with adequate strength and of suitable quality;
- be free of defects.

Harmful materials, such as asbestos are not used.

Components are kept in good repair and working order, so that the required dimensions remain fulfilled despite wear.

Components will be selected and installed so that foreseeable environmental influences and special working conditions do not affect the safe operation of the lift.

Especially for the extreme temperatures which were agreed between the customer and the supplier, the choice of materials and components will be made with particular attention that they keep their characteristics for impact strength for the steel, rigidity and function for plastics, functional for the electronic components, viscosity for oils, etc.

By design of the load bearing elements, a safe operation of the lift is ensured for loads ranging up to 125 % (static) and up to 110 % (dynamic) of the rated load.

The requirements of this European Standard regarding electrical safety devices are such that the possibility of a failure of an electric safety device (see 5.11.1.2) complying with all the requirements of this European Standard need not be taken into consideration."

Users should be safeguarded against their own negligence and unwitting carelessness when using the lift in the intended way.

A user may, in certain cases, make one imprudent act. The possibility of two simultaneous acts of imprudence and/or the abuse of instructions for use is not considered.

If in the course of maintenance work a safety device, normally not accessible to the users, is deliberately neutralized, safe operation of the lift is no longer ensured, but compensatory measures will be taken to ensure users safety in conformity with maintenance instructions.

It is assumed that maintenance personnel is instructed and works according to the instructions.

Horizontal forces and/or energies to consider are indicated in the applicable clauses of the standard. Typically:

- the static force that a person normally exerts is of the magnitude of 300 N;
- the energies resulting from impact depend on the lift component where the impact can occur; if not otherwise specified the resulting force is assumed to be 1 000 N.

With the exception of the items listed below, a mechanical device built according to good practice and the requirements of the standard will not deteriorate to a point of creating hazard without the possibility of detection.

The following mechanical failures are considered:

- breakage of the suspension;
- uncontrolled slipping of the ropes on the traction sheave;
- breakage and slackening of all linkage by auxiliary ropes, chains and belts;
- failure of one of the mechanical components of the electromechanical brake which take part in the application of the braking action on the drum or disk;
- failure of a component associated with the main drive elements and the traction sheave;
- ropes leaving the pulleys and, in case of change of inclination, leaving the rollers;
- blockage of the rope movement;
- blockage or derailment of the vehicle.

The possibility of the safety gear not setting, should the vehicle free fall from the lowest landing, before the vehicle strikes the buffer(s) is considered acceptable.

When the speed of the vehicle is linked to the electrical frequency of the mains up to the moment of application of the mechanical brake, the speed is assumed not to exceed 115 % of the rated speed or a corresponding fractional speed.

Means of access are provided for the hoisting of heavy equipment.

To ensure the correct functioning of the equipment in the machinery space(s), i.e. taking into account the heat dissipated by the equipment, the ambient temperature in the machine room is assumed to be maintained between + 5 °C and + 40 °C.

Access ways to the working areas are adequately lit.

Minimum passageways required by building regulations are not obstructed by the open door/trap of the lift and/or any protection means for working areas outside of the well, where fitted according to the maintenance instructions (see above Principles).

Where more than one person is working at the same time on a lift, an adequate means of communication between these persons is ensured.

The fixing system of guards, which will be removed during maintenance and inspection, remains attached to the guard or to the equipment when the guard is removed.

1 Scope

1.1 This European Standard specifies the safety rules for the construction and installation of permanently installed new electric lifts, with traction or positive drive, serving defined landings levels, having a vehicle designed to convey passengers or passengers and loads, suspended by ropes or chains and travelling in a vertical plan along guide rails that are inclined at an angle of between 15° and 75° in relation to the horizontal.

1.2 In addition to the requirements of this standard, supplementary requirements should be considered in special cases (potentially explosive atmosphere, extreme climate conditions, seismic conditions, transporting dangerous goods, etc.).

1.3 This European Standard does not cover:

- a) lifts with drives other than those stated in 1.1;
- b) installation of electric lifts in existing buildings to the extent that space does not permit;
- c) important modifications (see Annex E) to a lift installed before this standard is brought into application;
- d) lifting appliances, such as paternosters, mine lifts, theatrical lifts, appliances with automatic caging, skips, lifts and hoists for building and public works sites, ships' hoists, platforms for exploration or drilling at sea, construction and maintenance appliances;
- e) safety during transport, installation, repairs, and dismantling of lifts;
- f) lifts with rated speed $\leq 0,15$ m/s.

However, this standard may usefully be taken as a basis.

Noise is not dealt with in this standard because it is not relevant to the safe use of the lift.

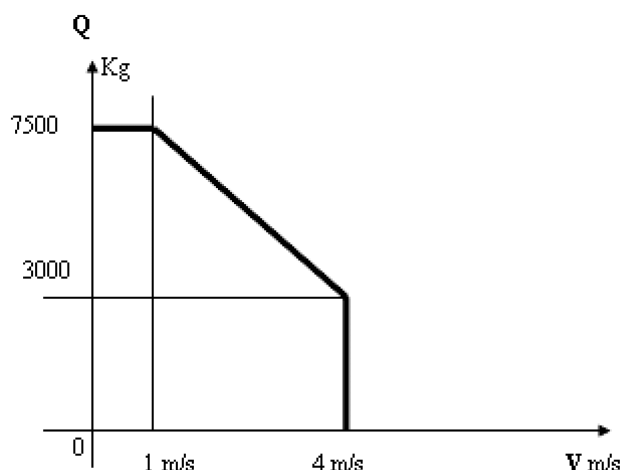
Vibrations are dealt with for electric parts only. Direct effects on human bodies are not considered as harmful.

1.4 This European Standard does not specify the additional requirements necessary for the use of lifts in case of fire.

1.5 Taking into account the state of art, the scope of the present standard is limited as follows:

- inclination: a variation in inclination is permitted for the travel path;
- travel path: confined within the vertical plane;
- maximum capacity of the car: 7 500 kg (100 passengers);
- maximum rated speed (v): 4 m/s.

Both characteristics (capacity and speed) are linked by the relation given in the following Figure 1.

**Key**

Q maximum capacity

V rated speed

Figure 1 — Speed and capacity

The standard applies to all the constituent components of the lift including: running tracks, guides, safety gear operating device, counter-rails, but excludes the supporting structures, civil engineering structures and anchorages that are dealt with by other regulations.

1.6 This standard is not applicable for inclined lifts which are manufactured before the date of its publication as EN.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 81-1:1998+A3:2009, *Safety rules for the construction and installation of lifts — Part 1: Electric lifts*

EN 81-28:2003, *Safety rules for the construction and installation of lifts — Lifts for the transport of persons and goods — Part 28: Remote alarm on passenger and goods passenger lifts*

EN 81-58:2003, *Safety rules for the construction and installation of lifts — Examination and tests — Part 58: Landing doors fire resistance test*

EN 131-2:2010+A1:2012, *Ladders — Part 2: Requirements, testing, marking*

EN 10025-2:2004, *Hot rolled products of structural steels — Part 2: Technical delivery conditions for non-alloy structural steels*

EN 12015:2014, *Electromagnetic compatibility — Product family standard for lifts, escalators and moving walks — Emission*

EN 12016:2013, *Electromagnetic compatibility — Product family standard for lifts, escalators and moving walks — Immunity*

EN 13015:2001+A1:2008, *Maintenance for lifts and escalators — Rules for maintenance instructions*

EN 13796-1:2005, *Safety requirements for cableway installations designed to carry persons — Carriers — Part 1: Grips, carrier trucks, on-board brakes, cabins, chairs, carriages, maintenance carriers, tow-hangers*

EN 50214:2006, *Flat polyvinyl chloride sheathed flexible cables*

EN 60068-2-6:2008, *Environmental testing — Part 2-6: Tests — Test Fc: Vibration (sinusoidal)* (IEC 60068-2-6:2007)

EN 60068-2-14:2009, *Environmental testing — Part 2-14: Tests — Test N: Change of temperature* (IEC 60068-2-14:2009)

EN 60068-2-27:2009, *Environmental testing — Part 2-27: Tests — Test Ea and guidance: Shock* (IEC 60068-2-27:2008)

EN 60204-1:2006, *Safety of machinery — Electrical equipment of machines — Part 1: General requirements* (IEC 60204-1:2005, modified)

EN 60269-1:2007, *Low-voltage fuses — Part 1: General requirements* (IEC 60269-1:2006)

EN 60529:1991, *Degrees of protection provided by enclosures (IP Code)* (IEC 60529:1989)¹⁾

EN 60747-5-5:2011, *Semiconductor devices — Discrete devices — Part 5-5: Optoelectronic devices — Photocouplers* (IEC 60747-5-5:2007)

EN 60664-1:2007, *Insulation coordination for equipment within low-voltage systems — Part 1: Principles, requirements and tests* (IEC 60664-1:2007)

EN 60947-4-1:2010, *Low-voltage switchgear and controlgear — Part 4-1: Contactors and motor-starters — Electromechanical contactors and motor-starters* (IEC 60947-4-1:2009)

EN 60947-5-1:2004, *Low-voltage switchgear and controlgear — Part 5-1: Control circuit devices and switching elements — Electromechanical control circuit devices* (IEC 60947-5-1:2003)²⁾

EN 61249-2 (all parts), *Materials for printed boards and other interconnecting structures — Part 2: Reinforced base materials, clad and unclad* (IEC 61249-2, all parts)

EN 61439-1:2011, *Low-voltage switchgear and controlgear assemblies — Part 1: General rules* (IEC 61439-1:2011)

EN 61508-1:2010, *Functional safety of electrical/electronic/programmable electronic safety-related systems — Part 1: General requirements* (IEC 61508-1:2010)

EN 61508-2:2010, *Functional safety of electrical/electronic/programmable electronic safety-related systems — Part 2: Requirements for electrical/electronic/programmable electronic safety-related systems* (IEC 61508-2:2010)

EN 61508-3:2010, *Functional safety of electrical/electronic/programmable electronic safety-related systems — Part 3: Software requirements* (IEC 61508-3:2010)

EN 61508-7:2010, *Functional safety of electrical/electronic/programmable electronic safety related systems — Part 7: Overview of techniques and measures* (IEC 61508-7:2010)

1) This document is currently impacted by EN 60529:1991/A1:2000 and EN 60529:1991/A2:2013.

2) This document is currently impacted by EN 60947-5-1:2004/A1:2009.

EN 61558-1:2005, *Safety of power transformers, power supplies, reactors and similar products — Part 1: General requirements and tests (IEC 61558-1:2005)*

EN 61800-5-2:2007, *Adjustable speed electrical power drive systems — Part 5-2: Safety requirements — Functional (IEC 61800-5-2:2007)*

EN 62326-1:2002, *Printed boards — Part 1: Generic specification (IEC 62326-1:2002)*

EN ISO 12100:2010, *Safety of machinery — General principles for design — Risk assessment and risk reduction (ISO 12100:2010)*

EN ISO 13857:2008, *Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs (ISO 13857:2008)*

HD 21.3 S3, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V — Part 3: Non-sheathed cables for fixed wiring (IEC 60227-3)*

HD 21.4 S2, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V — Part 4: Sheathed cables for fixed wiring (IEC 60227-4)*

HD 21.5 S3, *Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V — Part 5: Flexible cables (cords) (IEC 60227-5)*

HD 22.4 S4, *Cables of rated voltages up to and including 450/750 V and having cross-linked insulation — Part 4: Cords and flexible cables*

HD 214 S2, *Method for determining the comparative and the proof tracking indices of solid insulating materials under moist conditions (IEC 60112)*

HD 60364-4-41:2007, *Low-voltage electrical installations — Part 4-41: Protection for safety — Protection against electric shock (IEC 60364-4-41:2005, modified)*

HD 60364-6:2007, *Low-voltage electrical installations — Part 6: Verification (IEC 60364-6:2006, modified)*

ISO 7465:2007, *Passenger lifts and service lifts — Guide rails for lift cars and counterweights — T-type*

3 Terms and definitions, symbols and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in EN ISO 12100:2010, EN 81-1:1998+A3:2009 and the following apply.

NOTE The term “lift” in this documents means “lift with an inclined travel path”.

3.1.1

building

civil engineering works

3.1.2

angle of inclination

α

(angle d'inclinaison) (Neigungswinkel)

angle between the travel path as measured against the horizontal