INTERNATIONAL STANDARD



First edition 2008-05-01

Implants for surgery — Mechanical testing of implantable spinal devices — Fatigue test method for spinal implant assemblies using an anterior support

Implants chirurgicaux — Essais mécaniques des dispositifs spinaux implantables — Méthode d'essai de fatigue des ensembles d'implants spinaux utilisant un support antérieur



Reference number ISO 12189:2008(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below

Anis document is a preview denerated by Fig.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org Published in Switzerland

Contents

Forev	vordiv
Introd	luctionv
1	Scope1
2	Normative references
3	Terms and definitions
4	Principle
5	Reagents and materials
5.1	Fluid test medium optional)
5.2	Test specimen
6	Apparatus
6.1	Testing machine
6.2	Means of mounting and enclosing the test specimen
6.3	Temperature control system (optional)
7	Procedure
8	Test report
9	Accuracy and bias
9.1	Accuracy 10
9.2	Accuracy and bias
Biblic	Bias

Senerated by the

Foreword


ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in Maison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires applied by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12189 was prepared by Technical Committee ISO/TC 150, *Implants for surgery*, Subcommittee SC 5, *Osteosynthesis and spinal devices*.

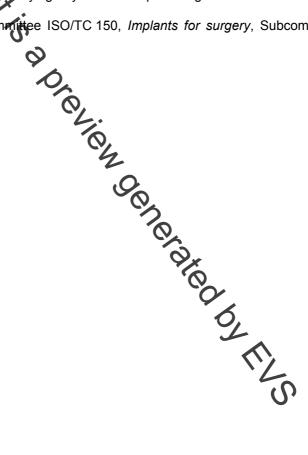

Introduction

Different concepts of posterior spinal fusion devices such as "rigid" and "semi-rigid" or "dynamic" systems are available on the market. Some of these existing spinal implants are not indicated in major instability cases ("semi-rigid" or "dynamic" implants, hook- and wire-based fixation implants, artificial ligaments, etc.), because they have been designed to allow load-sharing with the anterior column. This document strongly emphasises the effects of the load-sharing phenomenon, largely described in the literature, as a very important feature regarding the load patterns to which the spinal implants are submitted.

As these different concepts result in different implant behaviour, a corpectomy configuration construct might not always be appropriate for testing, since total corpectomy without subsequent provision for anterior support occurs very seldom in clinical practice, and also because this kind of construct neglects the influence of anterior column support or implant loading. Moreover, some kinds of implant are often too flexible to be tested on their own or in a corpectance configuration. This International Standard is intended to allow fatigue testing of flexible spinal implants and allow biomechanical fatigue testing of any kind of spinal implants, particularly semi-rigid and dynamic implants, regardless of their intrinsic rigidity. This document describes compression/flexion fatigue testing, additional mechanical tests, such as multi-directional testing (shear, torsion, lateral bending), might be required to assess clinical device safety.

For devices which are able to withstan loading in a corpectomy configuration, the test should be performed without anterior support in accordance with ASTM F1717 to demonstrate that, in a worst-case scenario, the device can support full load.

This International Standard is related to the methods for fatigue test of spinal implant assemblies (for fusion or motion preservation) with an anterior support.

the for fatigue test of spinar imposed

this document is a preview denerated by EUS

Implants for surgery — Mechanical testing of implantable spinal devices — Fatigue test method for spinal implant assemblies using an anterior support

1 Scope

This International Standard specifies methods for fatigue testing of spinal implant assemblies (for fusion or motion preservation) using an anterior support. It is intended to provide a basis for the assessment of intrinsic static and dynamic strength of spinal implants.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10243, Tools for pressing — Compression springs with rectangular section — Housing dimensions and colour coding

ASTM F1717, Standard Test Methods for Spinal Implet Constructs in a Vertebrectomy Model

3 Terms and definitions

For the purposes of this document, the following terms and detipitions apply.

3.1

active length of the longitudinal element

straight line distance between the centre of attachment of the superior and the centre of attachment of the inferior anchor

3.2

model moment arm

perpendicular distance to the applied load between the insertion point of an anchor and the load application centre

3.3

failure

permanent deformation resulting from fracture; plastic deformation or loosening beyond the ultimate displacement that would render the spinal implant assembly ineffective or unable to adequately resist load

3.4

insertion point of an anchor

location where the anchor is attached to the segment model