

High-strength structural bolting assemblies for  
preloading - Part 3: System HR - Hexagon bolt and nut  
assemblies

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

See Eesti standard EVS-EN 14399-3:2015 sisaldb Euroopa standardi EN 14399-3:2015 ingliskeelset teksti.	This Estonian standard EVS-EN 14399-3:2015 consists of the English text of the European standard EN 14399-3:2015.
Standard on jõustunud sellekohase teate avaldamisega EVS Teatajas	This standard has been endorsed with a notification published in the official bulletin of the Estonian Centre for Standardisation.
Euroopa standardimisorganisatsioonid on teinud Euroopa standardi rahvuslikele liikmetele kättesaadavaks 18.02.2015.	Date of Availability of the European standard is 18.02.2015.
Standard on kättesaadav Eesti Standardikeskusest.	The standard is available from the Estonian Centre for Standardisation.

Tagasisidet standardi sisu kohta on võimalik edastada, kasutades EVS-i veebilehel asuvat tagasiside vormi või saates e-kirja meiliaadressile [standardiosakond@evs.ee](mailto:standardiosakond@evs.ee).

ICS 21.060.01

Standardite reproduutseerimise ja levitamise õigus kuulub Eesti Standardikeskusele

Andmete paljundamine, taastekitamine, kopeerimine, salvestamine elektroonsesse süsteemi või edastamine ükskõik millises vormis või millisel teel ilma Eesti Standardikeskuse kirjaliku loata on keelatud.

Kui Teil on küsimusi standardite autorikaitse kohta, võtke palun ühendust Eesti Standardikeskusega:

Aru 10, 10317 Tallinn, Eesti; koduleht [www.evs.ee](http://www.evs.ee); telefon 605 5050; e-post [info@evs.ee](mailto:info@evs.ee)

The right to reproduce and distribute standards belongs to the Estonian Centre for Standardisation

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, without a written permission from the Estonian Centre for Standardisation.

If you have any questions about copyright, please contact Estonian Centre for Standardisation:

Aru 10, 10317 Tallinn, Estonia; homepage [www.evs.ee](http://www.evs.ee); phone +372 605 5050; e-mail [info@evs.ee](mailto:info@evs.ee)

EUROPEAN STANDARD

EN 14399-3

NORME EUROPÉENNE

EUROPÄISCHE NORM

February 2015

ICS 21.060.01

Supersedes EN 14399-3:2005

English Version

## High-strength structural bolting assemblies for preloading - Part 3: System HR - Hexagon bolt and nut assemblies

Boulonnnerie de construction métallique à haute résistance  
apté à la précontrainte - Partie 3 : Système HR - Boulons à  
tête hexagonale (vis + écrou)

Hochfeste vorspannbare Garnituren für  
Schraubverbindungen im Metallbau - Teil 3: System HR -  
Garnituren aus Sechskantschrauben und -muttern

This European Standard was approved by CEN on 18 October 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

## Contents

	Page
<b>Foreword</b> .....	<b>3</b>
<b>Introduction</b> .....	<b>4</b>
<b>1 Scope</b> .....	<b>6</b>
<b>2 Normative references</b> .....	<b>6</b>
<b>3 Bolts</b> .....	<b>7</b>
<b>3.1 Dimensions of bolts</b> .....	<b>7</b>
<b>3.2 Specification for bolts and reference standard</b> .....	<b>11</b>
<b>3.3 Marking of bolts</b> .....	<b>11</b>
<b>4 Nuts</b> .....	<b>12</b>
<b>4.1 Dimensions of nuts</b> .....	<b>12</b>
<b>4.2 Specification for nuts and reference standards</b> .....	<b>14</b>
<b>4.3 Proof load values of nuts</b> .....	<b>15</b>
<b>4.4 Decarburization of the nut thread</b> .....	<b>15</b>
<b>4.5 Marking of nuts</b> .....	<b>15</b>
<b>5 Designation of the bolt/nut assemblies</b> .....	<b>16</b>
<b>6 Associated washers</b> .....	<b>16</b>
<b>7 Functional characteristics of the bolt/nut/washer(s) assembly</b> .....	<b>16</b>
<b>7.1 General</b> .....	<b>16</b>
<b>7.2 Maximum individual value of the bolt force during fitness for purpose test (<math>F_{bi,max}</math>)</b> .....	<b>17</b>
<b>7.3 Values of angle <math>\Delta\theta_1</math></b> .....	<b>17</b>
<b>7.4 Values of angle <math>\Delta\theta_2</math></b> .....	<b>17</b>
<b>7.5 Individual values of the <math>k</math>-factor (<math>k_i</math>), mean value of the <math>k</math>-factor (<math>k_m</math>) and coefficient of variation of the <math>k</math>-factor (<math>V_k</math>)</b> .....	<b>17</b>
<b>7.5.1 Individual values of the <math>k</math>-factor (<math>k_i</math>) for <math>k</math>-class K1</b> .....	<b>17</b>
<b>7.5.2 Mean value of the <math>k</math>-factor (<math>k_m</math>) and coefficient of variation of the <math>k</math>-factor (<math>V_k</math>) for <math>k</math>-class K2</b> .....	<b>18</b>
<b>Annex A (normative) Clamp lengths and grip lengths</b> .....	<b>19</b>
<b>A.1 Clamp lengths for bolting assemblies with one or two washers</b> .....	<b>19</b>
<b>A.2 Grip lengths for bolting assemblies with one or two washers</b> .....	<b>22</b>
<b>Bibliography</b> .....	<b>28</b>

## Foreword

This document (EN 14399-3:2015) has been prepared by Technical Committee CEN/TC 185 "Fasteners", the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2015 and conflicting national standards shall be withdrawn at the latest by November 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 14399-3:2005.

In comparison with EN 14399-3:2005, the following modifications have been made:

- Table 1 containing the overview of the composition of bolting assemblies and component marking has been added;
- the coefficient of variation of the  $k$ -factor,  $V_k$ , was changed from 0,10 to 0,06;
- specifications for the designation of the bolting assemblies have been revised;
- Annex A with detailed specifications on clamp lengths and grip lengths has been added.

EN 14399 consists of the following parts, under the general title *High-strength structural bolting assemblies for preloading*:

- *Part 1: General requirements;*
- *Part 2: Suitability for preloading;*
- *Part 3: System HR — Hexagon bolt and nut assemblies;*
- *Part 4: System HV — Hexagon bolt and nut assemblies;*
- *Part 5: Plain washers;*
- *Part 6: Plain chamfered washers;*
- *Part 7: System HR — Countersunk head bolt and nut assemblies;*
- *Part 8: System HV — Hexagon fit bolt and nut assemblies;*
- *Part 9: System HR or HV — Direct tension indicators for bolt and nut assemblies;*
- *Part 10: System HRC — Bolt and nut assemblies with calibrated preload.*

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

## Introduction

This document on structural bolting reflects the situation in Europe where two technical solutions exist to achieve the necessary ductility of bolt/nut/washer(s) assemblies. These solutions consist of two different systems (HR and HV) of bolt/nut/washer assemblies, see Table 1. Both systems are well proven and it is the responsibility of the experts using structural bolting whether they use the one or the other system.

It is, however, important for the performance of the assembly to avoid mixing up the components of both systems. Therefore, bolts and nuts for both systems are standardized in one single part of this European Standard each and the marking of the components of the same system is uniform.

Preloaded bolted assemblies are very sensitive to differences in manufacture and lubrication. Therefore it is important that the bolting assemblies are supplied by one manufacturer who is always responsible for the functionality of the bolting assemblies.

For the same reason it is important that coating of the bolting assemblies is under the control of one manufacturer.

Beside the mechanical properties of the components, the functionality of the bolting assemblies requires that the specified preload can be achieved if the bolting assemblies are tightened with a suitable procedure. For this purpose a test method for the suitability of the bolting assemblies for preloading was created, which will demonstrate whether the functionality of the bolting assemblies is fulfilled.

It should be pointed out that compared to ISO 272 the widths across flats (large series) for M12 and M20 have been changed to 22 mm and 32 mm respectively. These changes are justified by the following reasons.

Under the specific conditions of structural bolting, the compressive stresses under the bolt head or nut for the sizes M12 may become too large with the width across flats of 21 mm, especially if the washer is fitted eccentrically to the bolt axis.

For the size M20, the width across flats of 34 mm is very difficult to be produced. The change to 32 mm is primarily motivated by economics but it should also be pointed out that the width across flats of 32 mm was common practice in Europe.

**Table 1 — Composition of high-strength structural bolting assemblies and component marking**

Type of bolting assembly	System HR				System HV		System HRC			
<b>General requirements</b>	EN 14399-2 and, if any, additional testing specified in the product standard				EN 14399-1					
<b>Suitability for preloading</b>										
Bolt and nut	EN 14399-3	EN 14399-7	EN 14399-4	EN 14399-8	EN 14399-10	HVP10.9	HR10	EN 14399-10		
Bolt	HR8.8	HR10.9	HR8.8	HR10.9	HR10.9	HVP10.9	HRC10.9			
Nut	HR8 or HR10	HR10	HR8 or HR10	HR10	HV10	HR10		HRD10		
<b>Washer(s)</b>	EN 14399-5 <sup>a</sup> or EN 14399-6				EN 14399-6					
Marking	H or HR <sup>b</sup>				H or HV <sup>b</sup>					
<b>Direct tension indicator and nut face washer or bolt face washer, if any</b>	EN 14399-9				H or HR <sup>b</sup>					
Marking	Direct tension indicator	H8	H10	H8	H10	H10	Not applicable			
	Nut face washer	HN		HN		HN				
	Bolt face washer	HB		Not applicable		HB				

<sup>a</sup> EN 14399-5 can only be used under the nut.<sup>b</sup> At the choice of the manufacturer.<sup>c</sup> Mandatory mark for washers with enlarged outer diameter according to EN 14399-5 only.

## 1 Scope

This European Standard specifies, together with EN 14399-1 and EN 14399-2, the requirements for assemblies of high-strength structural bolts and nuts of system HR suitable for preloaded joints with large widths across flats, thread sizes M12 to M36 and property classes 8.8/8 or 8.8/10 and 10.9/10.

Bolting assemblies in accordance with this document have been designed to allow preloading of at least  $0.7 f_{ub} \times A_s$ <sup>1)</sup> according to EN 1993-1-8 (Eurocode 3) and to obtain ductility predominantly by plastic elongation of the bolt. For this purpose the components have the following characteristics:

- normal nut height (style 1), see EN ISO 4032;
- thread length of the bolt according to ISO 888.

Bolting assemblies in accordance with this document include washers according to EN 14399-6 or to EN 14399-5 (under the nut only).

**NOTE** Attention is drawn to the importance of ensuring that bolting assemblies are correctly used if satisfactory results are to be obtained. For recommendations concerning proper application, reference to EN 1090-2 is made.

General requirements and requirements for suitability for preloading are specified in EN 14399-2.

Clamp lengths and grip lengths for the bolting assemblies are specified in the normative Annex A.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 14399-1, *High-strength structural bolting assemblies for preloading - Part 1: General requirements*

EN 14399-2, *High-strength structural bolting assemblies for preloading - Part 2: Suitability for preloading*

EN 14399-5, *High-strength structural bolting assemblies for preloading - Part 5: Plain washers*

EN 14399-6, *High-strength structural bolting assemblies for preloading - Part 6: Plain chamfered washers*

EN 26157-1, *Fasteners - Surface discontinuities - Part 1: Bolts, screws and studs for general requirements (ISO 6157-1)*

EN ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel - Part 1: Bolts, screws and studs with specified property classes - Coarse thread and fine pitch thread (ISO 898-1)*

EN ISO 898-2, *Mechanical properties of fasteners made of carbon steel and alloy steel - Part 2: Nuts with specified property classes - Coarse thread and fine pitch thread (ISO 898-2)*

EN ISO 3269, *Fasteners - Acceptance inspection (ISO 3269)*

EN ISO 4759-1, *Tolerances for fasteners - Part 1: Bolts, screws, studs and nuts - Product grades A, B and C (ISO 4759-1)*

EN ISO 6157-2, *Fasteners - Surface discontinuities - Part 2: Nuts (ISO 6157-2)*

1)  $f_{ub}$  is the nominal tensile strength ( $R_m$ ) and  $A_s$  the nominal stress area of the bolt.

EN ISO 10684, *Fasteners - Hot dip galvanized coatings (ISO 10684)*

ISO 261, *ISO general purpose metric screw threads - General plan*

ISO 965-2, *ISO general purpose metric screw threads - Tolerances - Part 2: Limits of sizes for general purpose external and internal screw threads - Medium quality*


ISO 965-5, *ISO general purpose metric screw threads - Tolerances - Part 5: Limits of sizes for internal screw threads to mate with hot-dip galvanized external screw threads with maximum size of tolerance position h before galvanizing*

ISO 3508, *Thread run-outs for fasteners with thread in accordance with ISO 261 and ISO 262*

### 3 Bolts

#### 3.1 Dimensions of bolts

See Figure 1 and Table 2.

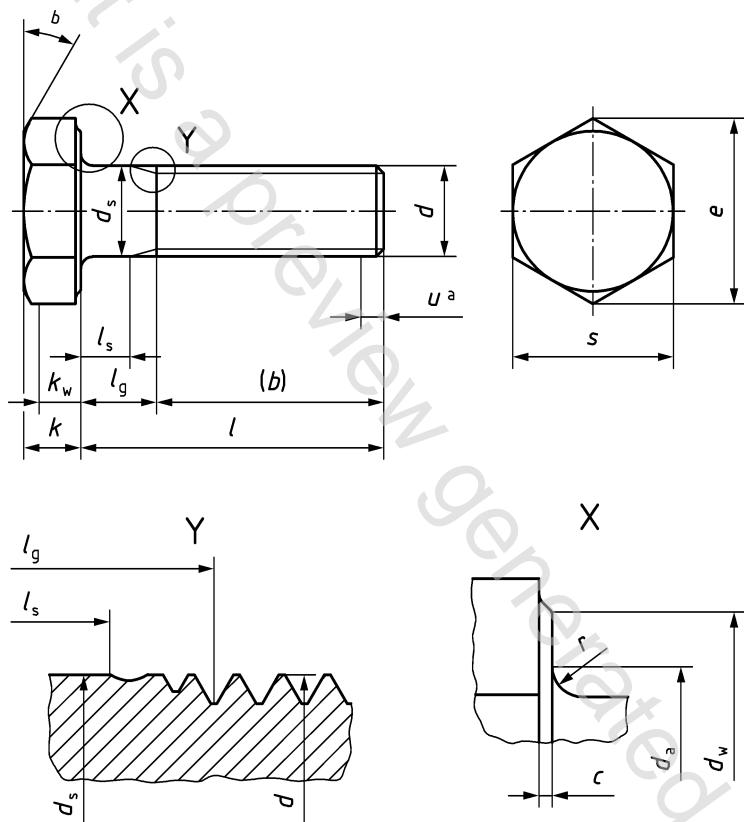

#### Key

a incomplete thread  $u \leq 2P$

b  $15^\circ$  to  $30^\circ$

**Figure 1 — Dimensions of bolts**

The difference between  $l_g$  and  $l_s$  should not be less than  $1,5 P$ .

For coated bolts, the dimensions apply prior to coating.