

**Aerospace series - Cables, electrical,
aircraft use - Test methods - Part 505:
Tensile test on conductors and strands**

Aerospace series - Cables, electrical, aircraft use -
Test methods - Part 505: Tensile test on conductors
and strands

EESTI STANDARDI EESSÕNA

NATIONAL FOREWORD

<p>Käesolev Eesti standard EVS-EN 3475-505:2007 sisaldab Euroopa standardi EN 3475-505:2007 ingliskeelset teksti.</p> <p>Käesolev dokument on jõustatud 30.10.2007 ja selle kohta on avaldatud teade Eesti standardiorganisatsiooni ametlikus väljaandes.</p> <p>Standard on kättesaadav Eesti standardiorganisatsioonist.</p>	<p>This Estonian standard EVS-EN 3475-505:2007 consists of the English text of the European standard EN 3475-505:2007.</p> <p>This document is endorsed on 30.10.2007 with the notification being published in the official publication of the Estonian national standardisation organisation.</p> <p>The standard is available from Estonian standardisation organisation.</p>
--	---

<p>Käsitlusala:</p> <p>This standard specifies a method of measuring the tensile properties of strands and conductors. When required, it can be used also on finished wires. It shall be used together with EN 3475-100.</p>	<p>Scope:</p> <p>This standard specifies a method of measuring the tensile properties of strands and conductors. When required, it can be used also on finished wires. It shall be used together with EN 3475-100.</p>
---	---

ICS 49.060

Võtmesõnad: aerospace transport, air transport, aircraft, cables, electric cables, electric conductors, electrical, electrical cords, single wires, specification (approval), specifications, tensile strength, testing

English Version

**Aerospace series - Cables, electrical, aircraft use - Test
methods - Part 505: Tensile test on conductors and strands**

Série aérospatiale - Câbles électriques à usage
aéronautique - Méthodes d'essais - Partie 505 :
Résistance à la traction des conducteurs et des brins

Luft- und Raumfahrt - Elektrische Leitungen für
Luftfahrtverwendung - Prüfverfahren - Teil 505:
Zugfestigkeit der Einzeldrähte und Leiterseile

This European Standard was approved by CEN on 21 June 2007.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents		Page
Foreword.....		3
1	Scope	4
2	Normative references	4
3	Definitions	4
4	Apparatus	5
5	Method	5
6	Requirements	5

Foreword

This document (EN 3475-505:2007) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2008, and conflicting national standards shall be withdrawn at the latest by February 2008.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 3475-505:2002.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

1 Scope

This standard specifies a method of measuring the tensile properties of strands and conductors.

When required, it can be used also on finished wires.

It shall be used together with EN 3475-100.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3475-100, *Aerospace series — Cables, electrical, aircraft use — Test methods — Part 100: General.*

3 Definitions

3.1 Ultimate tensile strength or Tensile strength at break

The *ultimate tensile strength* also called the *tensile strength at break* of a material is the limit stress at which the material actually breaks, with sudden release of the stored elastic energy (released as noise and/or heat and/or more cracks e.g. for brittle materials). This point is the fracture marked X on the curve below. (see Figure 1).

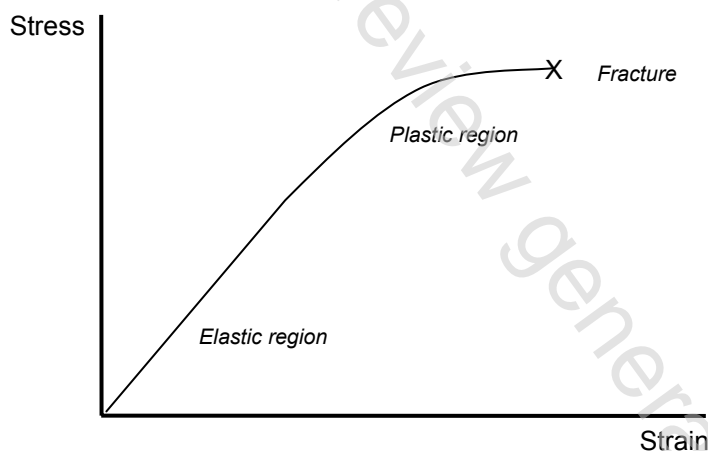


Figure 1

3.2 Ultimate elongation or Elongation at break

The *Ultimate elongation* also called *Elongation at break* is the elongation of material at rupture under tensile loading.

3.3 Elastic limit or Yield strength – Offset yield strength or Conventional elastic limit

The *Elastic limit* also called *Yield strength* is the maximum stress that can be developed in a material without causing plastic deformation. It is the stress at which a material start to exhibit a permanent deformation and is a practical approximation of elastic limit.